

LED LAMP

ARTISAN



G16.5, G30, G40


LOW
non visible
FLICKER

Features & Benefits

- Reduced flicker down to 10%
- Compare to 6.6% traditional incandescent
 - Far below California T20 standard 30%
 - Significantly improve light quality
 - Optimize eye comfort

- With clear, amber or milky white glass cover
- Dimmable, High CRI (80+)
- 15,000 hour average life span
- Rated for damp locations

Dimensional drawing

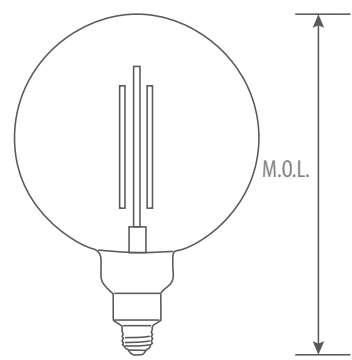

Warranty & Cautions

2-year limited warranty

Operating temperature range between -20°C and +40°C

Ordering Information

Example: AR-A19LF/8W/30/D/MW

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)	BASE	DIMMABLE	COVER
AR (Artisan)	G16.5LF G30LF G40LF	4W 5W	22 (2200K) 27 (2700K) 30 (3000K)	E12 (E12) Blank (E26)	D (dimmable)	C (Clear) A (Amber) MW (Milky White)

Product Specification

Ordering Code	Model Number	Product Description	Watts (W)	Replacement Filament	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens (lm)	CCT(K)	CRI	Damp LOC.	M.O.L. (inch)	Case QTY.
1771146	AR-G16.5LF/4W/27/E12/D/C	G16.5 Low Flicker 4W 27K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	350	2700	80	Y	3.31	50
1771208	AR-G16.5LF/4W/30/E12/D/C	G16.5 Low Flicker 4W 30K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	350	3000	80	Y	3.31	50
1771212	AR-G16.5LF/4W/30/E12/D/MW	G16.5 Low Flicker 4W 30K E12 Dimmable Milky white	4	-	40W	E12	120	15,000	330°	300	3000	80	Y	3.31	50
1771109	AR-G16.5/4W/27/D/C	G16.5 4W 27K E26 Dimmable Clear	4	-	40W	E26	120	15,000	330°	350	2700	80	Y	3.31	50
1771147	AR-G30LF/5W/27/D/C	G30 Low Flicker 5W 27K Dimmable Clear	5	-	50W	E26	120	15,000	330°	500	2700	80	Y	5.28	40
1771215	AR-G30LF/5W/30/D/C	G30 Low Flicker 5W 30K Dimmable Clear	5	-	50W	E26	120	15,000	330°	500	3000	80	Y	5.28	40
1771216	AR-G30LF/5W/30/D/MW	G30 Low Flicker 5W 30K Dimmable Milky White	5	-	50W	E26	120	15,000	330°	450	3000	80	Y	5.28	40
1772113	AR-G30/6W/27/D/F	G30 6W 27K Dimmable Frost/Milky White	6	-	60W	E26	120	15,000	330°	600	2700	80	Y	5.28	40
1771217	AR-G40LF/4W/30/D/C	G40 Low Flicker 4W 30K Dimmable Clear	4	-	40W	E26	120	15,000	330°	350	3000	80	Y	6.77	8
1771218	AR-G40LF/4W/30/D/MW	G40 Low Flicker 4W 30K Dimmable Milky White	4	-	40W	E26	120	15,000	330°	320	3000	80	Y	6.77	8
1772910	AR-G40LF/5W/22/D/A	G40 Low Flicker 5W 22K Dimmable Amber	5	50W	-	E26	120	15,000	330°	500	2200	80	Y	6.77	8