


## TECHNICAL SPECIFICATIONS

- Limiting Control Method : Constant Voltage
- LED density : 30LEDs/m
- Power Consumption: : 9W/M
- CRI : 80+
- Beam angle : 120°
- Voltage : 24V DC
- Segment Width : 10mm
- Board Type/Colot : 2oz Density, White PCB
- Reel length : 5m
- Cuttable segments : 100mm
- Mounting Non-Porous : 3M double sided Tape
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22
- Operating Temperature : -25°C to 60°C
- Dimmer : DMX, PWM, RF PWM, 0-10V, MLV Incandescent

Available color temperature (Kelvin)

- RGBW-30K

Product code: LCLS24V-9W-RGBW-30K-IP22

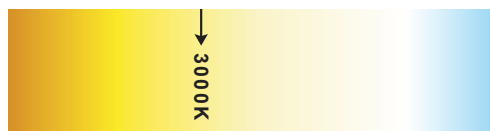

## CONNECTION GUIDE

## Parallel Connection Guide

Parallel connections are strongly recommended for LED Strip installation. It is important to not go over the recommended length. The LED Strip will start to dim after the recommended length and will damage the Strip over time.

