







### TECHNICAL DRAWING

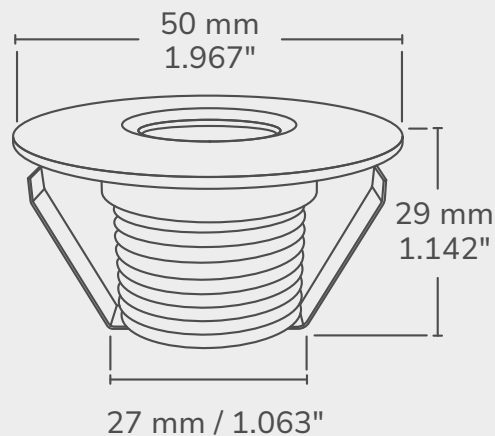

### TECHNICAL SPECIFICATIONS

|                           |                     |                     |                                                 |
|---------------------------|---------------------|---------------------|-------------------------------------------------|
| • Voltage                 | : 12/24 V DC        | • Cutout size       | : 35mm / 1.378 inches                           |
| • Light Intensity         | : 125 Lumens        | • Lifespan          | : 25 000 Hours                                  |
| • Consumption             | : 1 Watts           | • Dimmable          | : Yes                                           |
| • Incandescent Equivalent | : 20 Watts          | • Protection Rating | : IP67                                          |
| • Colors and temperatures | : 3000K, 4000K, RGB | • Trim Options      | : 1 side, 2 sides, Round, Square & Round Louver |
| • Projection angle        | : 25°               | • Trim Colors       | : White, Black & Brushed Stainless              |
| • IRC                     | : >80               |                     |                                                 |
| • Power Factor            | : +90               |                     |                                                 |

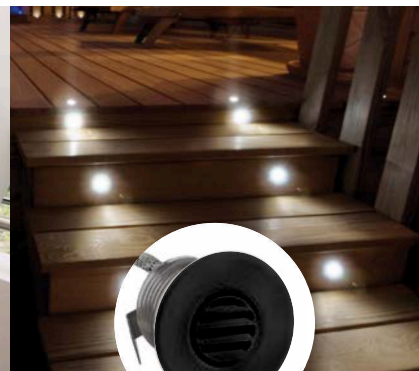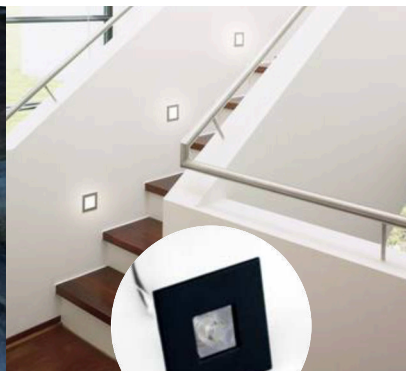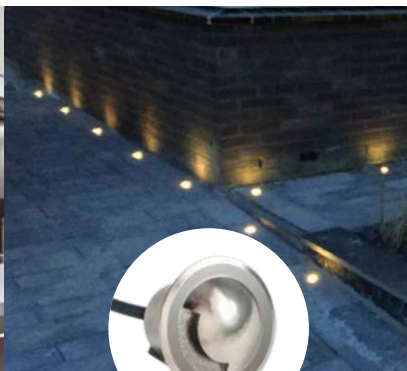

## TRIM OPTIONS

| MODELS                                                                              |                       | PRODUCT CODES |                          |
|-------------------------------------------------------------------------------------|-----------------------|---------------|--------------------------|
|    | Round Stainless       | 3000K:        | LCPK2000R-1W-3000K-BS    |
|                                                                                     |                       | 4000K:        | LCPK2000R-1W-4000K-BS    |
|                                                                                     |                       | RGB:          | LCPK2000R-1W-RGB-BS      |
|    | Round White           | 3000K:        | LCPK2000R-1W-3000K-WH    |
|                                                                                     |                       | 4000K:        | LCPK2000R-1W-4000K-WH    |
|                                                                                     |                       | RGB:          | LCPK2000R-1W-RGB-WH      |
|    | Round Black           | 3000K:        | LCPK2000R-1W-3000K-BK    |
|                                                                                     |                       | 4000K:        | LCPK2000R-1W-4000K-BK    |
|                                                                                     |                       | RGB:          | LCPK2000R-1W-RGB-BK      |
|    | Square Stainless      | 3000K:        | LCPK2000S-1W-3000K-BS    |
|                                                                                     |                       | 4000K:        | LCPK2000S-1W-4000K-BS    |
|                                                                                     |                       | RGB:          | LCPK2000S-1W-RGB-BS      |
|   | Square White          | 3000K:        | LCPK2000S-1W-3000K-BS    |
|                                                                                     |                       | 4000K:        | LCPK2000S-1W-4000K-BS    |
|                                                                                     |                       | RGB:          | LCPK2000S-1W-RGB-BS      |
|  | Square Black          | 3000K:        | LCPK2000S-1W-3000K-BK    |
|                                                                                     |                       | 4000K:        | LCPK2000S-1W-4000K-BK    |
|                                                                                     |                       | RGB:          | LCPK2000S-1W-RGB-BK      |
|  | 1 Way Stainless Steel | 3000K:        | LCPK2000R-1S-1W-3000K-BS |
|                                                                                     |                       | 4000K:        | LCPK2000R-1S-1W-4000K-BS |
|                                                                                     |                       | RGB:          | LCPK2000R-1S-1W-RGB-BS   |
|  | 2 Way Stainless Steel | 3000K:        | LCPK2000R-2S-1W-3000K-BS |
|                                                                                     |                       | 4000K:        | LCPK2000R-2S-1W-4000K-BS |
|                                                                                     |                       | RGB:          | LCPK2000R-2S-1W-RGB-BS   |
|  | Persienne Stainless   | 3000K:        | LCPK2000P-1W-3000K-BS    |
|                                                                                     |                       | 4000K:        | LCPK2000P-1W-4000K-BS    |
|                                                                                     |                       | RGB:          | LCPK2000P-1W-RGB-BS      |
|  | Persienne Black       | 3000K:        | LCPK2000P-1W-3000K-BK    |
|                                                                                     |                       | 4000K:        | LCPK2000P-1W-4000K-BK    |
|                                                                                     |                       | RGB:          | LCPK2000P-1W-RGB-BK      |