




## TECHNICAL DRAWING

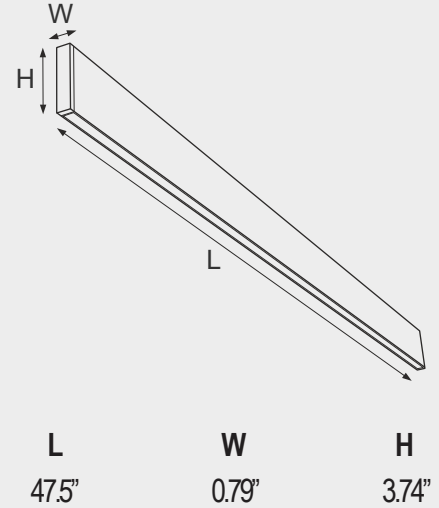

### DESCRIPTION

This 4-foot bidirectional linear suspended luminaire, available in aluminum and black finishes, combines aesthetics and performance for a versatile LED lighting solution. Emitting light both upwards and downwards, it features a 40W power and a 120° beam angle, creating an impressive luminous flux of 3412 lumens for efficient and uniform illumination. The exceptional lifespan of 50,000 hours ensures long-term reliability and durability, while its sleek, modern design adapts harmoniously to various environments. This luminaire comes with a 60-inch hanging cable, offering installation flexibility and the ability to adjust the height as needed. Additionally, its construction makes it suitable for use in damp locations, enhancing its versatility in different settings.

### FEATURES

- 25% Up light, 75% Down light
- Robust Aluminium Casing
- Available in Aluminium or Black color
- Exceptionally Slim Profile
- Suspension-Mount Installation
- Compatible with 0-10V Dimming
- Suitable for use in damp locations (IP40 protection)
- 120° Beam angle
- 60" Suspension cable
- 50 000 hours lifetime
- 5 years warranty

### SPECIFICATION

Model	Color Temp. (K)	Color	Wattage (W)	Equivalent to (W)	Lumen	Input Voltage (V)	Operating Temperature (°C)
LCSUSP-UD-4FT-AL-40W-30K	3000	Aluminium	40	150	3412	110-260	0 to 40
LCSUSP-UD-4FT-AL-40W-40K	4000						
LCSUSP-UD-4FT-BK-40W-30K	4000	Black					

**INSTALLATION**

Suspension-Mount (Suspension Kit included)

Length of Suspension Cable: 60"

Length of Power Cord: 70"

