




## DIMENSIONAL DRAWING

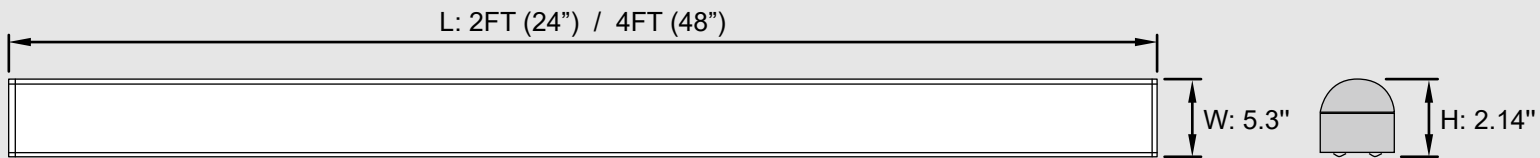

## FEATURES

- Slim Design Linear Wrap in 2' and 4' lengths.
- Operating temperature range of -20°C ~ +40°C.
- Field Selectable 4 CCT (3000K, 3500K, 4000K & 5000K) along with Auto Sensing 120-347V Driver.
- PMMA opal lens.
- Suitable for Surface, or suspended chain mounting.
- Compatible with 0-10V Dimming, ETL Listed.
- Usable in damp location.
- CRI 80 with 0.9FP

## SPECIFICATIONS

### Housing :

Slim Profile CRCA Housing with Polycarbonate End Caps.

### Optics :

Opal Colour PMMA Diffuser.

### Mounting :

Suitable for Surface & Pendent Mounting.

### Driver :

Autosensing 120-347V driver, Operating temperature range of -20°C ~ +40°C.

### LED :

Field Selectable CCT of 3000K, 3500K, 4000K & 5000K.

### Controls :

Compatible with 0-10V Dimming, 10% Min.

Optional LV Microwave Motion Sensor.

## PRODUCT SPECIFICATIONS

| Product code             | Wattage (W) | Input Voltage (V) | Hour Rating (L70) | Beam Angle | Initial Delivered Lumens (lumen) | CCT (Kelvin) | CRI |
|--------------------------|-------------|-------------------|-------------------|------------|----------------------------------|--------------|-----|
| LCWRAP-20W-4CCT-UV-T-2FT | 20          | 120-347V          | 50,000            | 100°       | 2600                             | 30-35-40-50  | >80 |
| LCWRAP-40W-4CCT-UV-T-4FT | 40          | 120-347V          | 50,000            | 100°       | 5200                             | 30-35-40-50  | >80 |

## POLAR CANDELA

