





## TECHNICAL DRAWING

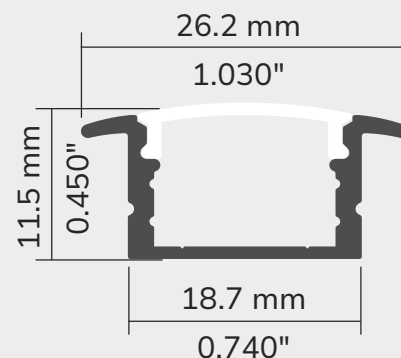

## A COMPACT AND RECESSED PROFILE







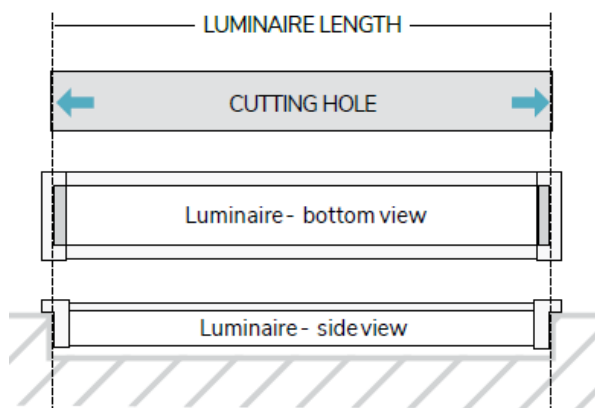








Here is a compact and recessed profile allowing you to make the LED light source invisible. The edges on each side of this extrusion allow for a recessed installation, while having understated style with its discreet and neat appearance.

Follow this diagram to calculate the correct length



## FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens\*.
- The edge allows recessed installation. To be installed in a 19mm (3/4-inch) groove.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch), LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

PROFILE	LENSES	MOUNTING HARDWARE	MOTION SENSORS	LENGTH
				Custom length by sections of 2 to 240 inches (6m).
				
				
				
				
				
				

## GALLERY

