





## TECHNICAL DRAWING





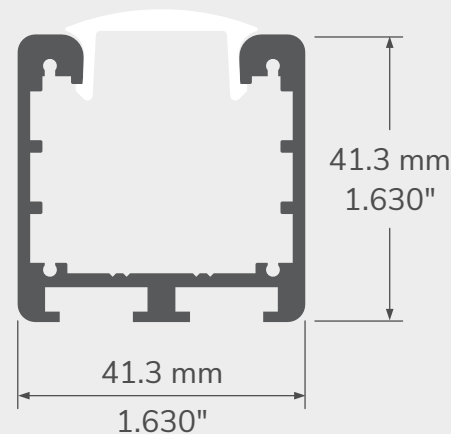

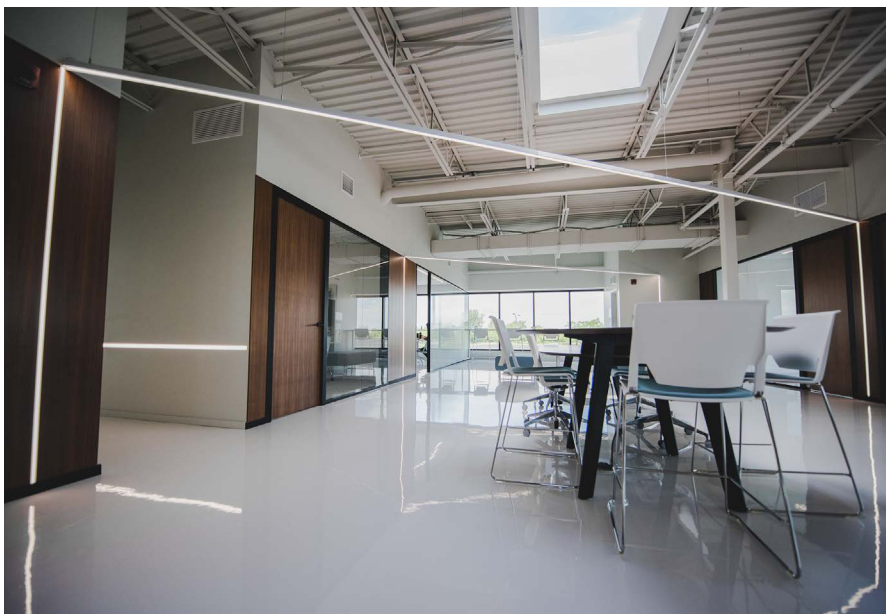



















## A STURDY ALUMINUM PROFILE

The 94 profile with its twin mounting channels allows for a wide range of installation options. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using corner joiners. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.



## FEATURES

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heat sink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has application guides for 10mm (3/8-inch) wide LED engines.
- Designed to give a uniform light without hot spots.
- Its mounting channels make it compatible with a wide range of installation accessories.

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 94 - Profile, Alu  94BK - Profile, Black  94WH - Profile, White  94CS - 94 Profile, custom color	 CL- Clear lens  OX- Optiflex lens  OP- Opal Lens  PR- Prime Lens  FO- Focus lens  NO- No lens	 CLIP- Clip-in Bracket  Surface 2-side bracket S20- Alu S21- Black S22- White  Surface 1-side bracket S10- Alu S11- Black S12- White  Surface 90-deg. bracket S30- Alu S31- Black S32- White  Swivel wall bracket SW0- Alu SW1- Black SW2- White  Swivel sign arm, 6" offset SA60- Alu SA61- Black SA62- White  Swivel sign arm, 18" offset SA180- Alu SA181- Black SA182- White  Type B dbl, chann. susp. kit with 15ft. aircraft cable SUS0- Alu SUS1- Black SUS2- White	<p>NOTE: Only available with SUS bracket (suspension)</p>  Remote driver canopy plate CR0- Alu CR1- Black CR2- White  Integrated driver in canopy CI0- Alu CI1- Black CI2- White  Integrated driver & suspension kit CIK0- Alu CIK1- Black CIK2- White	 HER- High efficiency reflector  NO- No option	Custom length by sections of 6 to 240 inches (6m).
<p>RAL NUMBER</p>  94 corner 90°, 6x6" <i>Joiners to be ordered separately</i> CH900-94 corner 90°, 6x6", alu CH901-94 corner 90°, 6x6", black CH902-94 corner 90°, 6x6", white  94 corner 135°, 6x6" <i>Joiners to be ordered separately</i> CH1350-94 corner 135°, 6x6", alu  Joiners JS - Type B straight joiner	<p>QTY</p> <p>QTY</p> <p>QTY</p> <p>QTY</p>				

