

# LED Full Cutoff Wall Pack



|                  |                         |                               |                    |
|------------------|-------------------------|-------------------------------|--------------------|
| <b>SSL-WP3T+</b> | <b>Segment</b>          | <b>Wattage Range</b>          | <b>Lumen Range</b> |
|                  | Commercial & Industrial | Selectable Wattage (25W-120W) | 3,350-16,080lm     |

## Features

- Modern Design Compact Wallpack with Glass diffuser for long life.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ + 50 °C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (25W - 60W in 60M & 80W - 120W in 120L model).
- Efficacy of  $\geq 134$  lm/W with 120-347V LED Auto-Sensing driver



## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

UV Resistant Glass Cover

### Mounting:

Surface Mounting

### Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ + 50 °C

### LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of  $\geq 134$ lm/w.

### Controls:

Compatible with 0-10V Dimming, Photocell Sensor.




## Dimensional Drawing

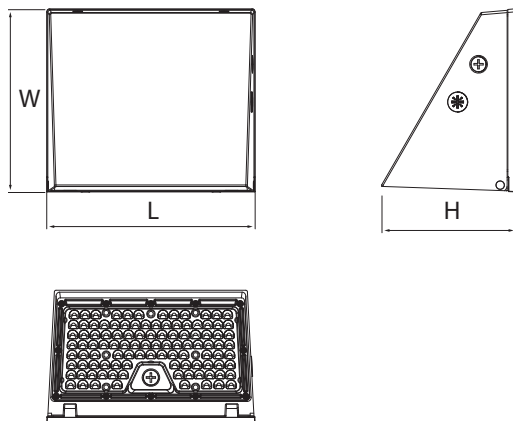

|                | L      | W     | H     |
|----------------|--------|-------|-------|
| SSL-WP3T+/60M  | 10.63" | 9.33" | 6.85" |
| SSL-WP3T+/120L | 13.27" | 9.33" | 8.11" |

## Polar Candela

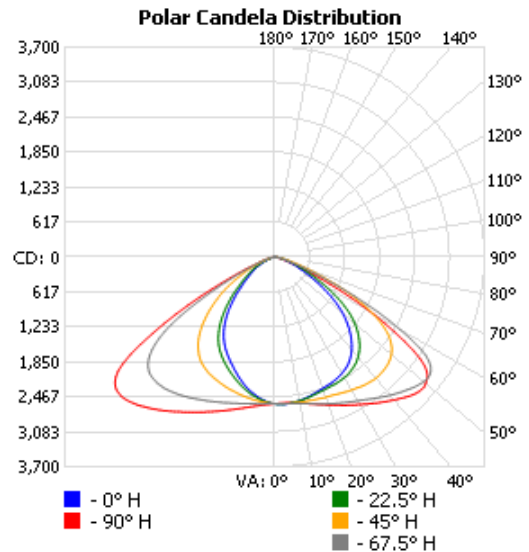

## Applications



Malls



Hotels



Industry



Office Complex

# LED Full Cutoff Wall Pack



|                  |                         |                               |                    |
|------------------|-------------------------|-------------------------------|--------------------|
| <b>SSL-WP3T+</b> | <b>Segment</b>          | <b>Wattage Range</b>          | <b>Lumen Range</b> |
|                  | Commercial & Industrial | Selectable Wattage (25W-120W) | 3,350-16,080lm     |

## Ordering Information Example: SSL-WP3T+/60M/MW/MK/120-347V/D/PC/DB

| Family Name                | Fixture Type                      | Type  | Wattage                 | CCT                        | Voltage  | Dimmable     | Photocell      | Finish                                       |
|----------------------------|-----------------------------------|---|-------------------------|----------------------------|----------|--------------|----------------|--|
| SSL (Solid state lighting) | WP3T+ (LED full cutoff wall pack) | 60M (Max. 60W, medium size)<br>120L (Max. 120W, large size) | MW (Selectable Wattage) | MK (Selectable Kelvin/CCT) | 120-347V | D (Dimmable) | PC (Photocell) | DB (Dark bronze)<br>BK (Black)<br>WH (White) |

## Product Specification

| Ordering Code | Model Number                          | Wattage (W) | Input Voltage (V) | L70-Hour Rating | Initial Delivered Lumens (lumen) | CCT (K)  | CRI | Wet Location | Dimension LxWxH (inch) | Case QTY. |
|---------------|---------------------------------------|-------------|-------------------|-----------------|----------------------------------|----------|-----|--------------|------------------------|-----------|
| 3680385       | SSL-WP3T+/60M/MW/MK/120-347V/D/PC/DB  | 60-40-25    | 120-347V          | 50,000          | 8040-5360-3350                   | 30-40-50 | ≥80 | Yes          | 10.63"×9.33"×6.85"     | 1         |
| 3682264       | SSL-WP3T+/60M/MW/MK/120-347V/D/PC/BK  | 60-40-25    | 120-347V          | 50,000          | 8040-5360-3350                   | 30-40-50 | ≥80 | Yes          | 10.63"×9.33"×6.85"     | 1         |
| 3680386       | SSL-WP3T+/120L/MW/MK/120-347V/D/PC/DB | 120-100-80  | 120-347V          | 50,000          | 16080-13400-10720                | 30-40-50 | ≥80 | Yes          | 13.27"×9.33"×8.11"     | 1         |
| 3680387       | SSL-WP3T+/120L/MW/MK/120-347V/D/PC/BK | 120-100-80  | 120-347V          | 50,000          | 16080-13400-10720                | 30-40-50 | ≥80 | Yes          | 13.27"×9.33"×8.11"     | 1         |
| 3682260       | SSL-WP3T+/120L/MW/MK/120-347V/D/PC/WH | 120-100-80  | 120-347V          | 50,000          | 16080-13400-10720                | 30-40-50 | ≥80 | Yes          | 13.27"×9.33"×8.11"     | 1         |

## Related Products



SSL-XHC2



SSL-WP1TS



SSL-WP2T



DL-VT2