



The logo for LED CO features the word "LED" in a bold, green, sans-serif font, followed by "CO" in a black, sans-serif font. The letter "O" is stylized as a lightbulb with a base of three horizontal lines. A registered trademark symbol (®) is positioned to the upper right of the "O".


LED CO[®]

LED LANDSCAPING





TECHNICAL DRAWING

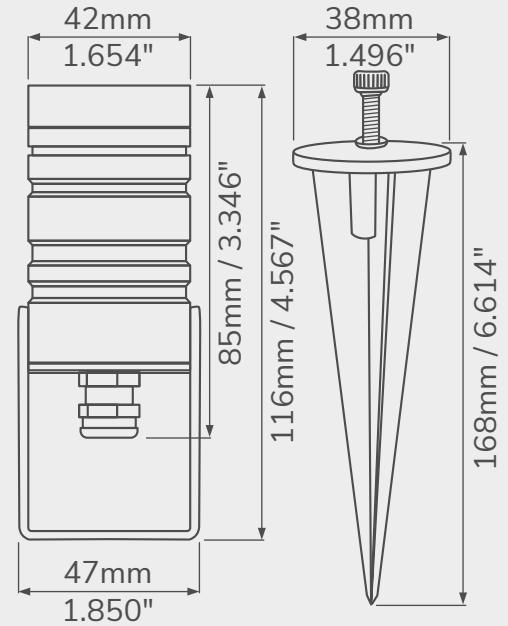


TECHNICAL SPECIFICATIONS

- | | | | |
|-------------------------|---------------------|---------------------|----------------|
| • Voltage | : 12V - 24V DC | • Lifespan | : 30 000 Hours |
| • Light Intensity | : 300 Lumens | • Dimmable | : Yes |
| • Consumption | : 3 Watts | • Protection Rating | : IP65 |
| • Color temperatures | : 3000K, 4000K, RGB | • Color | : Black |
| • Projection angle | : 45° | • Aluminum spike | : Yes |
| • Operating temperature | : -25°C ~ +60°C | | |






TECHNICAL DRAWING

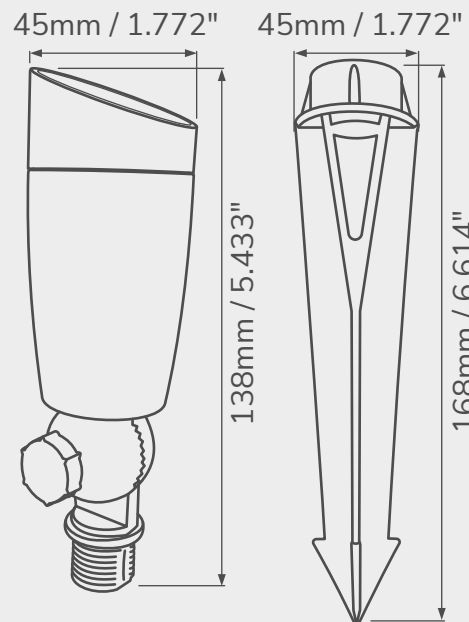

TECHNICAL SPECIFICATIONS

- | | | | |
|-------------------------|----------------------|---------------------|----------------|
| • Voltage | : 12V - 24V DC | • Lifespan | : 30 000 Hours |
| • Light Intensity | : 490 Lumens | • Dimmable | : Yes |
| • Consumption | : 3 Watts | • Protection Rating | : IP65 |
| • Color temperatures | : 3000K, 4000K, RGBW | • Color | : Black |
| • Projection angle | : 25° (optional 45°) | • Plastic spike | : Yes |
| • Operating temperature | : -25°C ~ +60°C | | |

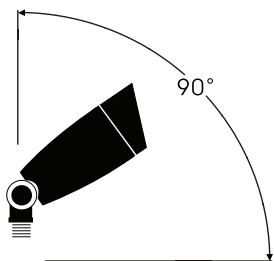


Rotatable Light Angle






TECHNICAL DRAWING

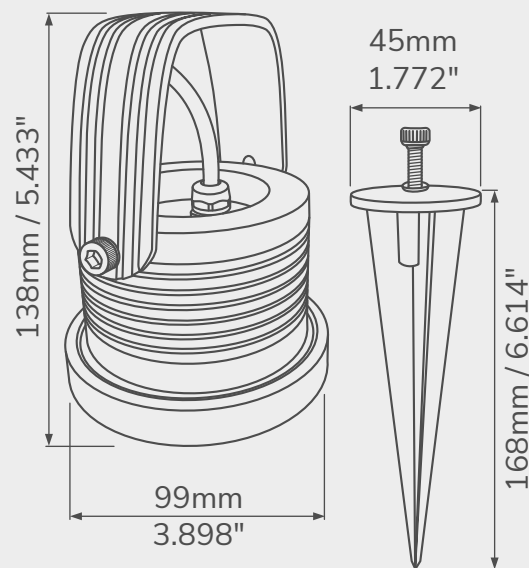

TECHNICAL SPECIFICATIONS



- | | | | |
|-------------------------|-----------------|---------------------|----------------|
| • Voltage | : 12V - 24V DC | • Lifespan | : 30 000 Hours |
| • Light Intensity | : 900 Lumens | • Dimmable | : Yes |
| • Consumption | : 9 Watts | • Protection Rating | : IP65 |
| • Color temperatures | : 3000K, 4000K | • Color | : Black |
| • Projection angle | : 40° | • Aluminum spike | : Yes |
| • Operating temperature | : -25°C ~ +60°C | | |



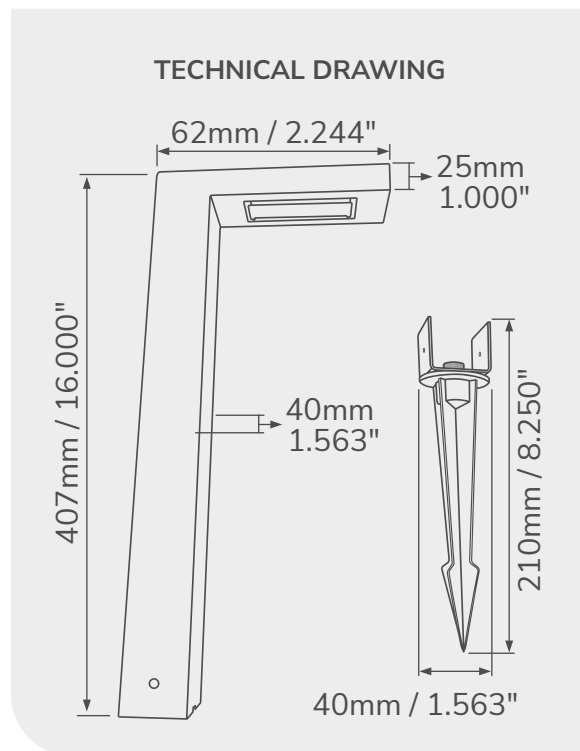



TECHNICAL SPECIFICATIONS

- Voltage : 12V / 24V DC
- Light Intensity : 255 Lumens
- Consumption : 3 Watts
- Color temperatures : 3000K, 4000K
- Projection angle : 120°
- Operating temperature : -25°C ~ +60°C
- Lifespan : 30 000 Hours
- Dimmable : Yes
- Protection Rating : IP65
- Color : Black
- Aluminum stake : Yes
- Housing : Stainless steele

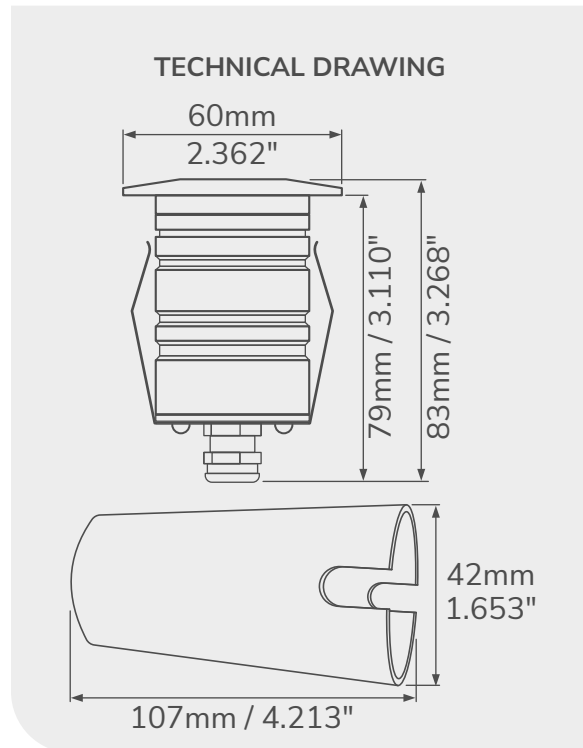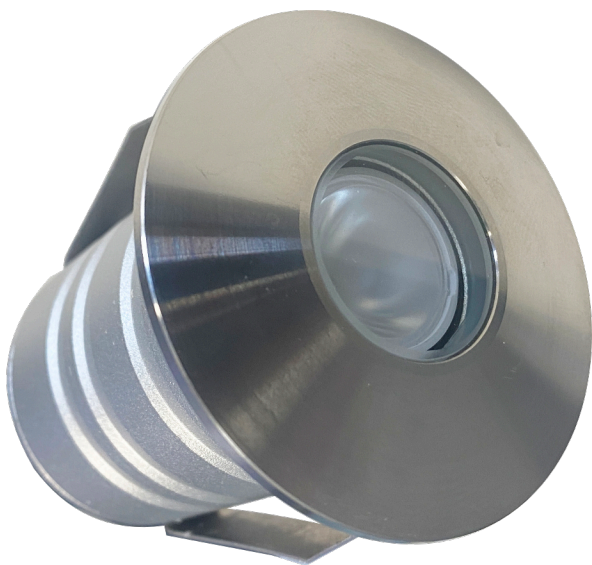


TECHNICAL SPECIFICATIONS

- Voltage : 12V / 24V DC
- Light Intensity : 300 Lumens
- Consumption : 3 Watts
- Color temperatures : 3000K, 4000K, RGB
- Projection angle : 15°
- Operating temperature : -25°C ~ +60°C
- Cutout size : 44mm / 1.732 inches
- Lifespan : 30 000 Hours
- Dimmable : Yes
- Protection Rating : IP65
- Color : Brushed Stainless
- PVC Sleeve : Yes

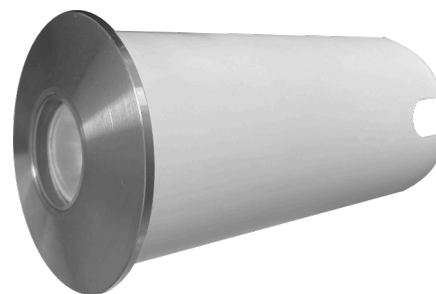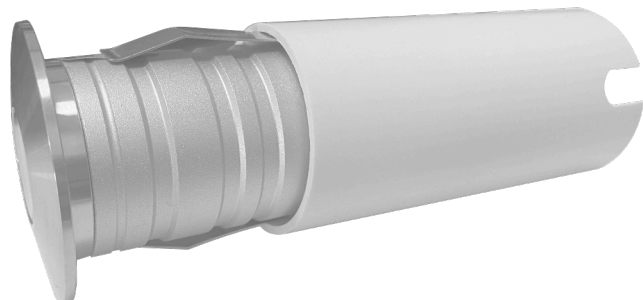





TECHNICAL DRAWING

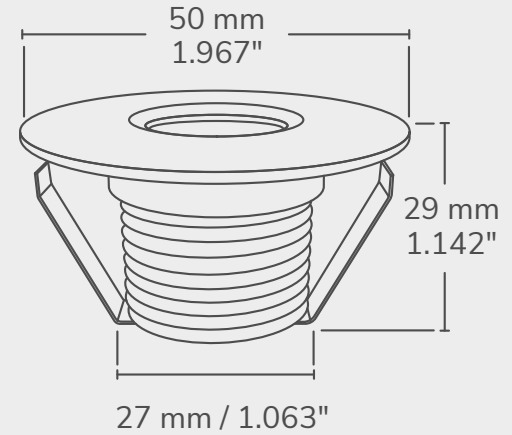

TECHNICAL SPECIFICATIONS

- | | | | |
|---------------------------|---------------------|---------------------|---|
| • Voltage | : 12/24 V DC | • Cutout size | : 35mm / 1.378 inches |
| • Light Intensity | : 125 Lumens | • Lifespan | : 25 000 Hours |
| • Consumption | : 1 Watts | • Dimmable | : Yes |
| • Incandescent Equivalent | : 20 Watts | • Protection Rating | : IP67 |
| • Colors and temperatures | : 3000K, 4000K, RGB | • Trim Options | : 1 side, 2 sides, Round, Square & Round Louver |
| • Projection angle | : 25° | • Trim Colors | : White, Black & Brushed Stainless |
| • IRC | : >80 | | |
| • Power Factor | : +90 | | |

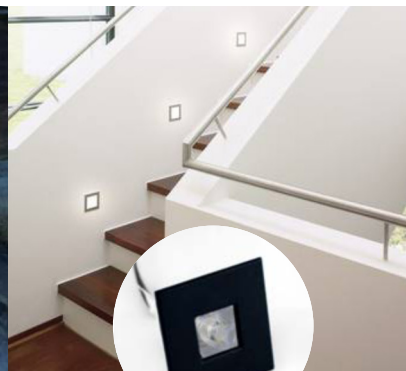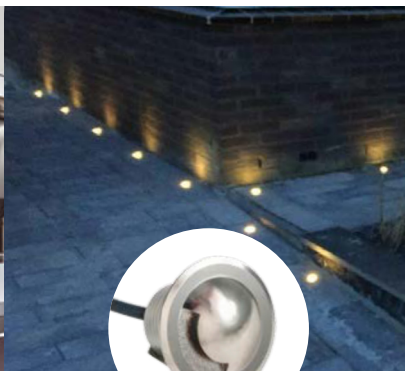

TRIM OPTIONS

MODELS

PRODUCT NUMBERS



1 Way Stainless Steel

LCPK2000R-1W-1S-30K

LCPK2000R-1W-1S-40K



2 Way Stainless Steel

LCPK2000R-1W-2S-30K

LCPK2000R-1W-2S-40K



Square Black

LCPK2000S-1W-BK-30K

LCPK2000S-1W-BK-40K



Square White

LCPK2000S-1W-WH-30K

LCPK2000S-1W-WH-40K



Square Brushed Stainless

LCPK2000S-1W-BS-30K

LCPK2000S-1W-BS-40K



Round Black

LCPK2000R-1W-BK-30K

LCPK2000R-1W-BK-40K



Round White

LCPK2000R-1W-WH-30K

LCPK2000R-1W-WH-40K



Round Brushed Stainless

LCPK2000R-1W-BS-30K

LCPK2000R-1W-BS-40K



Round Louver Black

LCPK2000P-1W-BK-30K

LCPK2000P-1W-BK-40K



Round Louver Stainless

LCPK2000P-1W-BS-30K

LCPK2000P-1W-BS-40K