

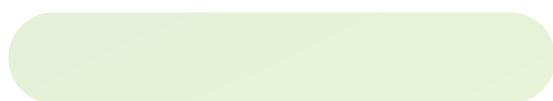


The logo for LED CO features the word "LED" in a bold, green, sans-serif font, followed by "CO" in a black, sans-serif font. The letter "O" is stylized as a lightbulb with a base of three horizontal lines. A registered trademark symbol (®) is positioned to the upper right of the "O".

LED CO[®]

INDOOR AND OUTDOOR LED STRIPS



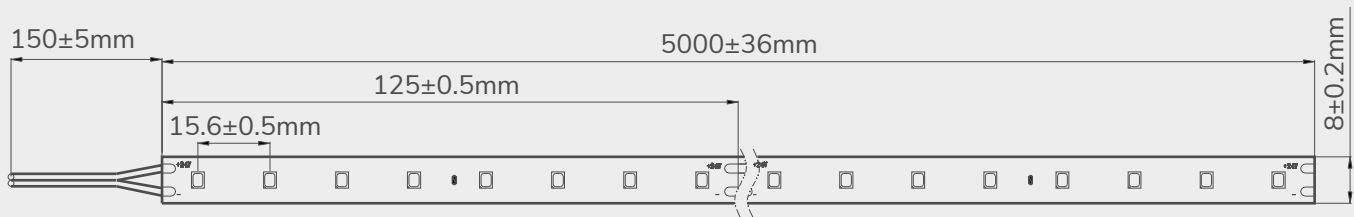


TECHNICAL SPECIFICATIONS

- Chip : Epistar 3528 SMD
- Number of LED per meter : 64pcs
- Power W/m±10% : 4.8W/M
- Lumens per watt : 130 LM/W
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 8mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 125mm (8 LED)
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available color temperature (Kelvin)

- 2700K (product: LCLS24V-24W-27K-IP22)
- 3000K (product: LCLS24V-24W-30K-IP22)
- 4000K (product: LCLS24V-24W-40K-IP22)

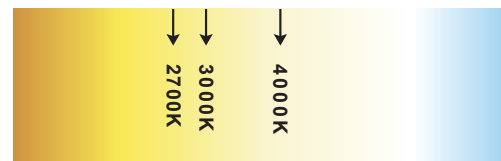

*All our LED strips are also available in waterproof (IP66) versions.





TECHNICAL SPECIFICATIONS

- Chip : Epistar 2835 SMD
- Number of LED per meter : 128pcs
- Power W/m±10% : 9.6W/M
- Lumens per watt : 130 LM/W
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 8mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 62.5mm (8 LEDs)
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22



Available color temperature (Kelvin)

- 2700K (product: LCLS24V-48W-27K-IP22)
- 3000K (product: LCLS24V-48W-30K-IP22)
- 3500K (product: LCLS24V-48W-35K-IP22)
- 4000K (product: LCLS24V-48W-40K-IP22)
- 5000K (product: LCLS24V-48W-50K-IP22)



*All our LED strips are also available in waterproof (IP66) versions.



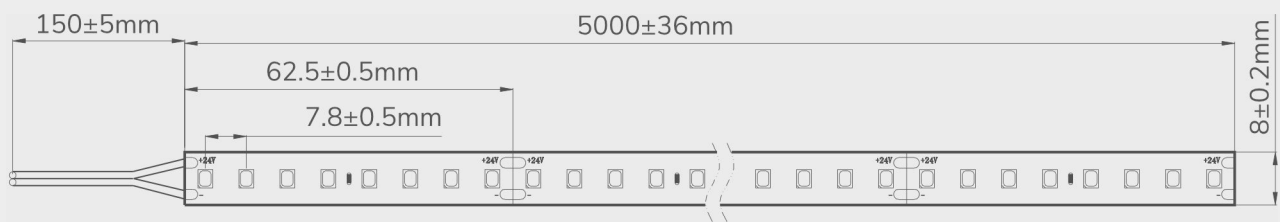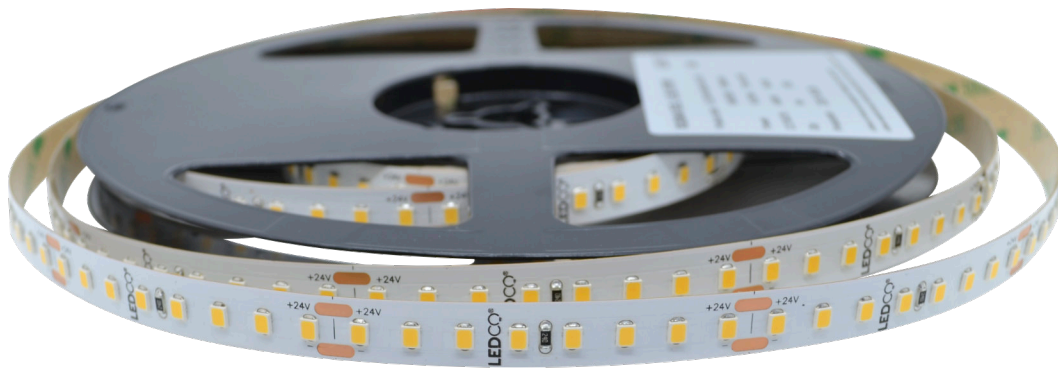

TECHNICAL SPECIFICATIONS


- Chip : Epistar 2835 SMD
- Number of LED per meter : 128pcs
- Power W/m±10% : 19.2W/M
- Lumens per watt : 120 LM/W
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 10mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 62.5mm (8 LEDs)
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available color temperature (Kelvin)

- 2700K (product: LCLS24V-96W-27K-IP22)
- 3000K (product: LCLS24V-96W-30K-IP22)
- 3500K (product: LCLS24V-96W-35K-IP22)
- 4000K (product: LCLS24V-96W-40K-IP22)
- 5000K (product: LCLS24V-96W-50K-IP22)



*All our LED strips are also available in waterproof (IP66) versions.

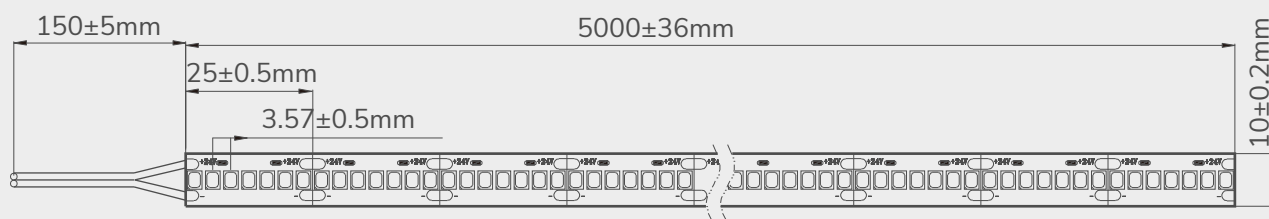


TECHNICAL SPECIFICATIONS

- Number of LED per meter : 280pcs
- Power W/m±10% : 28.8W/M
- Lumens per watt : 109 LM/W
- CRI : 80+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 10mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 25mm (7 LEDs)
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22


Available color temperature (Kelvin)

- 3000K (product: LCLS24V-144W-30K-IP22)
- 4000K (product: LCLS24V-144W-40K-IP22)

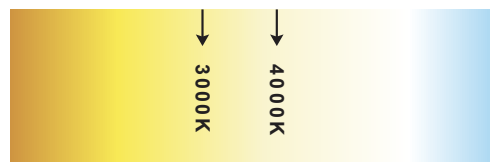

*All our LED strips are also available in waterproof (IP66) versions.



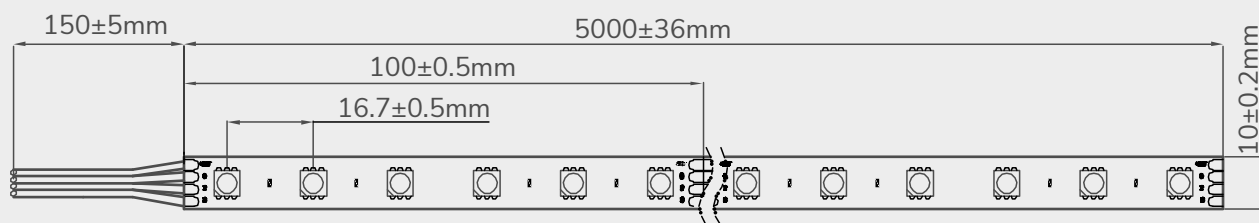

TECHNICAL SPECIFICATIONS


- RGB : Yes
- Number of LED per meter : 60pcs
- Power W/m±10% : 14.4W/M
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 10mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 1000mm
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available product

- RGB (product: LCLS24V-72W-RGB-IP22)

*All our LED strips are also available in waterproof (IP66) versions.



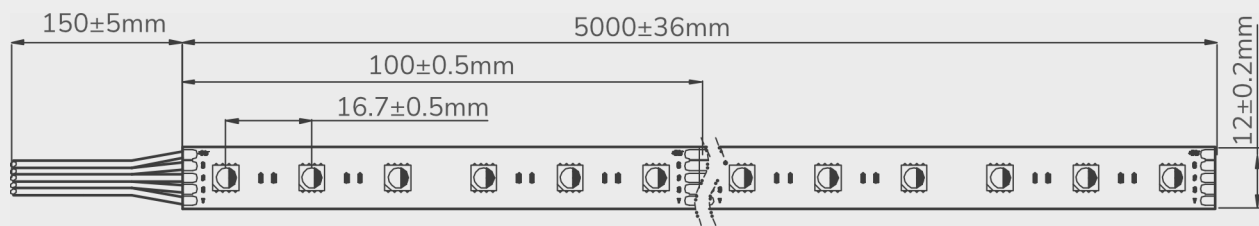


TECHNICAL SPECIFICATIONS


- RGBW : Yes
- Number of LED per meter : 60pcs
- Power W/m±10% : 19.2W/M
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 12mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 100mm
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available color temperature (Kelvin)

- RGBW (product: LCLS24V-RGBW30K-IP22)
- RGBW (product: LCLS24V-RGBW40K-IP22)

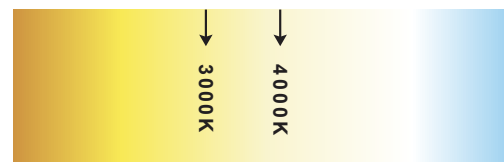

*All our LED strips are also available in waterproof (IP66) versions.

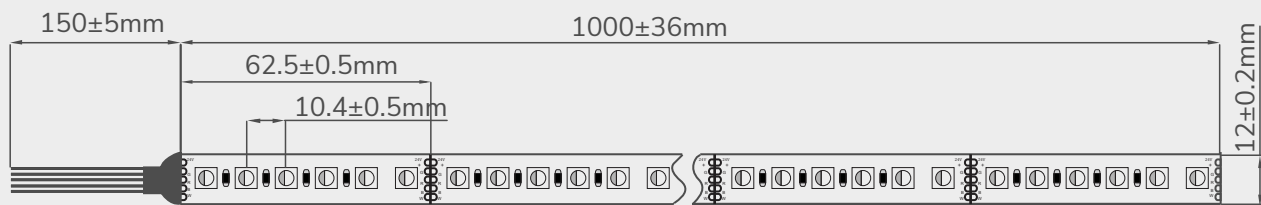


TECHNICAL SPECIFICATIONS


- RGBW : Yes
- Number of LED per meter : 96pcs
- Power W/m±10% : 23W/M
- CRI : 80+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 12mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 62.5mm
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available color temperature (Kelvin)

- RGBW (product: LCLS24V-23W-RGBW-40)
- RGBW (product: LCLS24V-23W-RGBW-30)

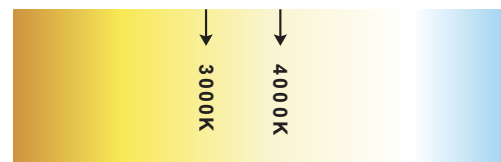

*All our LED strips are also available in waterproof (IP66) versions.

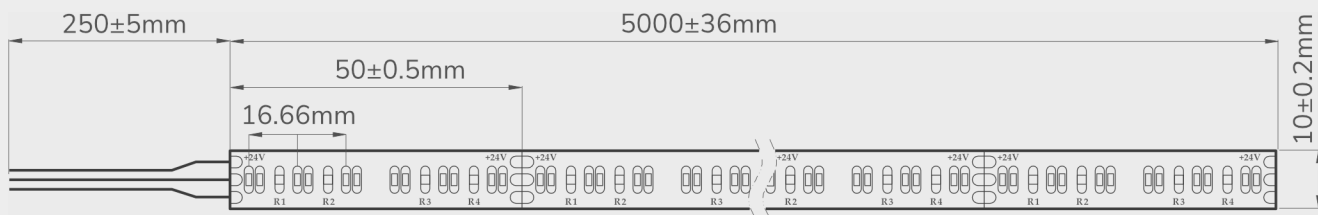


TECHNICAL SPECIFICATIONS


- CCT - 3000K-4000K-5000K : Yes
- Number of LED per meter : 602pcs
- Power W/m±10% : 20W/M
- Lumens per watt : 120 LM/W
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Dimmable : Yes
- PCB Width : 10mm
- PCB thickness : 3oz.
- Max length : 10m
- Cut Size : 50mm
- UL : Yes
- Lifespan : 50 000+ hours
- Protection code rating : IP22

Available color temperature (Kelvin)

- CCT (product: LCLS24V-100W-IP22-CCT)

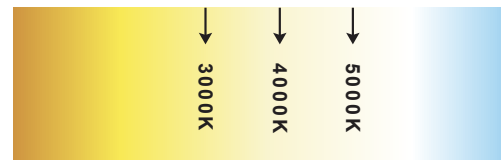


*All our LED strips are also available in waterproof (IP66) versions.

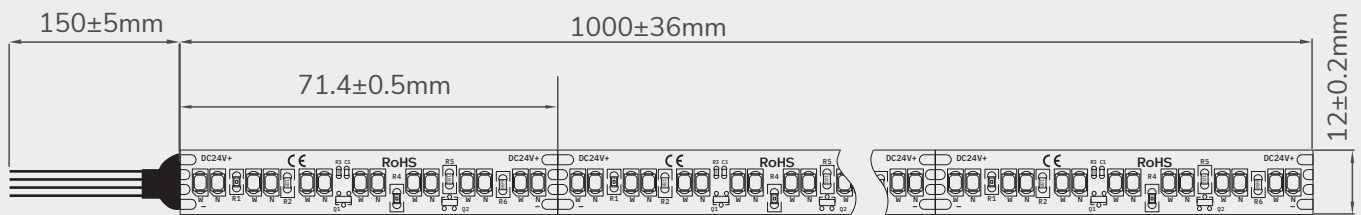


TECHNICAL SPECIFICATIONS

- | | | | |
|--------------------------|--|---|-------------------------|
| • Dim to warm span | : 2400K to 4000K | • Operating Temperature | : -20°C to +60°C |
| • LED density | : 59s/ft - 196s/m | • Limiting Control Method | : CV - Constant Voltage |
| • Power W/m±10% | : 17W/M | Available color temperature (Kelvin) | |
| • Lumens | : 1530lm to 1620lm | • DTW (product: LCLS24V-17W-DTW-4024K-IP22) | |
| • CRI | : 80+ | | |
| • Lighting angle | : 120° | | |
| • Voltage | : 24V DC | | |
| • Protection code rating | : IP22 | | |
| • PCB Width | : 12mm | | |
| • PCB thickness | : 3oz. | | |
| • Max length | : 10m | | |
| • Cut Size | : 71.4mm | | |
| • UL | : Yes | | |
| • Lifespan | : 50 000+ hours | | |
| • Dimmer | : Dmx PWM, RF PWM, 0-10v, MLV Incandescent | | |

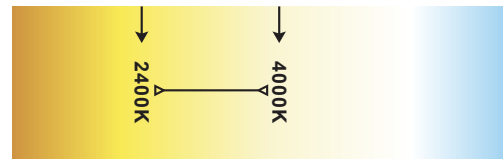

*All our LED strips are also available in waterproof (IP66) versions.

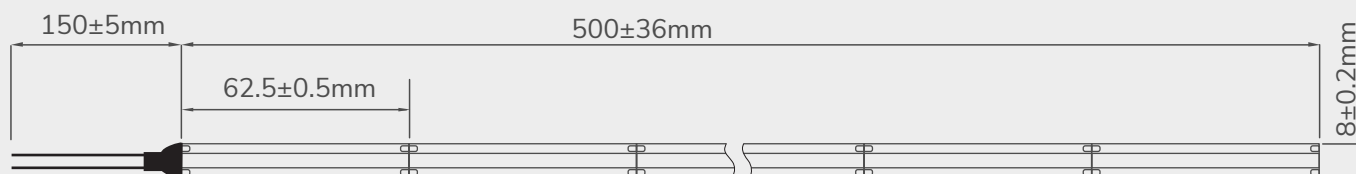


TECHNICAL SPECIFICATIONS

- LED density : 512 pcs/m
- Power W/m±10% : 11W/M
- CRI : 90+
- Lighting angle : 120°
- Voltage : 24V DC
- Protection code rating : IP22
- PCB Width : 8mm
- PCB thickness : 1.5mm
- Max length : 5m
- Cut Size : 62.5mm
- Lifespan : 50 000+ hours
- Dimmable : Yes
- Mounting : 3M double sided tape

- Operating Temperature : -20°C to +60°C

Available color temperature (Kelvin)

- DTW (product: LCLS24VCOB-11W)

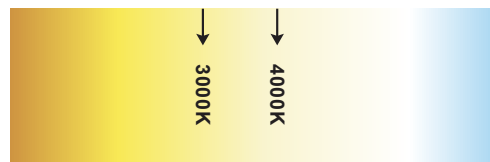

*All our LED strips are also available in waterproof (IP66) versions.