

2026 CATALOG

Add-ons

6 products



Updated October 4, 2026

TABLE OF CONTENTS

Add-ons



LED GYPSUM COVE - NIDUS, 8 FT

LCGYPSUM-NIDUS-8'

p. 3



LED STRIP KIT FOR SHOWER NICHE - #86 PROFILE

LCKIT-SHOWER-86

p. 5



RGBW LED STRIP STARTER KIT 9 W/M - 24 V

LCKIT-45W-RGBW-30K-IP22

p. 7



ROUND GU10 RECESSED SHOWER TRIM - Ø 4 1/2 IN

LCRIM-358-RSH

p. 9



WIFI DOOR CONTACT SENSOR - CR2 BATTERY

LCDO-WIFIDOORSENSOR-WH


p. 11




WIFI MOTION SENSOR - 110°, 4 TO 6 M

LCDO-WIFIMOTIONSENSOR-WH

p. 13



SECTION: 178 × 152 mm (7 × 6 IN)

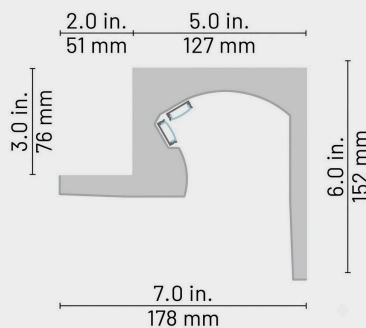

A GRAZED WALL, HIDDEN SOURCE, CLEAN CORNER

The NIDUS gypsum cove is set into the drywall and disappears into the wall or ceiling so only the light shows, with no added moulding or bulkhead to build. It grazes a wall with light, LED source hidden and corner intact, then is primed and painted like a wall.

FEATURES

- Set into the drywall
- Wall grazing, hidden source
- Primed and painted like a wall
- For LED strip up to 14 mm
- Fire-resistant material
- 8 ft (2.4 m) sections

DIMENSIONS

Width	178 mm (7.0 in)
Height	152 mm (6.0 in)
Other dimensions	51 · 127 · 76 mm (2.0 · 5.0 · 3.0 in)
Length	8 ft (2.4 m)
Linear weight	2.036 kg/m (1.368 lb/ft), without profile

MATERIAL

Body	Extruded polystyrene foam
Surface	Fibreglass reinforced, white plaster finish
Fire	NFPA Class C (ASTM E84)

INSTALLATION AND STRIP

1/2 in drywall	Flush installation
5/8 in drywall	With joint compound and tape
Support	2 × 3 in studs
LED strip	Up to 14 mm wide
Profiles	#84 or #85, sold separately
Power	24 V driver

ORDERING

Build the product code

1 Code

LCGYPSUM-NIDUS-8' 8 ft section

EXAMPLE

LCGYPSUM-NIDUS-8'

NIDUS cove, 8 ft

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCGYPSUM-NIDUS-8'	8' PROFILE GYPSUM NIDUS

LED strip, aluminum profile, lens and driver sold separately.

Cutting on site is the installer's responsibility.


24 V driver sized to the total installed length; our team checks the strip, diffuser and quantity at (450) 444-4007.



Profilé d'aluminium + Ruban LED + Transformateur



#86 PROFILE: 27.5 × 12 mm

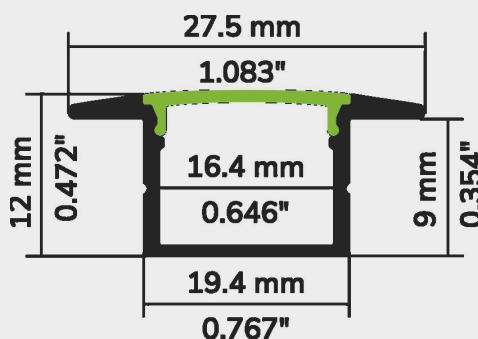**EVERYTHING NEEDED TO LIGHT A SHOWER NICHE**

Complete kit to light a shower niche: #86 recessed aluminum profile with diffuser and end caps, LED strip and driver. The profile, in 4 or 8 ft, gives a clean finish in the niche and the diffuser spreads an even, soft light with no dark areas. The strip is offered in 2700K, 3000K or 4000K, with a dimmable or non-dimmable driver.

FEATURES

- #86 recessed profile, 4 or 8 ft
- Opaque lens and end caps included
- 24 V IP66 LED strip, cut to length
- 2700K, 3000K or 4000K
- Dimmable or non-dimmable driver
- Dims with a 120 V wall dimmer

KIT CONTENTS

Profile	#86 recessed, 4 or 8 ft
Lens	Opaque
End caps	Finishing
LED strip	24 V · 9.6 W · IP66
Driver	24 W, dimmable or not

STRIP AND CONTROL

Colour temperature	2700K · 3000K · 4000K
Strip length	Cut to the profile length, not assembled
Dimming	Standard 120 V wall dimmer (DIM driver)

#86 PROFILE

Flange	27.5 mm (1.083 in)
Body	19.4 × 12 mm (0.767 × 0.472 in)
Inner channel	16.4 mm (0.646 in)
Material	Aluminum

ORDERING

Build the product code


1 Series LCKIT-SHOWER-86 shower niche kit	2 Length 4FT 4 ft 8FT 8 ft	3 Colour 27K 2700K 30K 3000K 40K 4000K	4 Driver (none) non-dimmable DIM dimmable
--	---	---	--

EXAMPLE	LCKIT-SHOWER-86	-	4FT	-	30K	-	DIM
	shower kit		4 ft		3000K		dimmable

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCKIT-SHOWER-86-4FT-27K	#86 profile 4 ft · 2700K · non-dimmable driver
LCKIT-SHOWER-86-4FT-27K-DIM	#86 profile 4 ft · 2700K · dimmable driver
LCKIT-SHOWER-86-4FT-30K	#86 profile 4 ft · 3000K · non-dimmable driver
LCKIT-SHOWER-86-4FT-30K-DIM	#86 profile 4 ft · 3000K · dimmable driver
LCKIT-SHOWER-86-4FT-40K	#86 profile 4 ft · 4000K · non-dimmable driver
LCKIT-SHOWER-86-4FT-40K-DIM	#86 profile 4 ft · 4000K · dimmable driver
LCKIT-SHOWER-86-8FT-27K	#86 profile 8 ft · 2700K · non-dimmable driver
LCKIT-SHOWER-86-8FT-27K-DIM	#86 profile 8 ft · 2700K · dimmable driver
LCKIT-SHOWER-86-8FT-30K	#86 profile 8 ft · 3000K · non-dimmable driver
LCKIT-SHOWER-86-8FT-30K-DIM	#86 profile 8 ft · 3000K · dimmable driver
LCKIT-SHOWER-86-8FT-40K	#86 profile 8 ft · 4000K · non-dimmable driver
LCKIT-SHOWER-86-8FT-40K-DIM	#86 profile 8 ft · 4000K · dimmable driver

The strip ships cut to the profile length (4 or 8 ft), not assembled: it is installed in the profile on site.
 The dimmable driver needs a standard 120 V wall dimmer.
 Full #86 profile data: see the LC PROF-86 sheet.



PHOTOS



RGB + 3000K WARM WHITE STRIP, READY TO INSTALL

Complete 24 V RGBW LED strip kits for indoor decorative lighting: strip in 5 m reels, 24 V driver and a controller with infrared remote and Wi-Fi module. The 3000K warm white comes from a separate diode, for a true white on top of the colours. Offered in 5, 10, 15 and 20 m for ceiling outlines, headboards, under-cabinet and niches.

FEATURES

- RGB + dedicated 3000K warm white
- 24 V DC, 9 W/m
- IR remote and Wi-Fi module
- 5, 10, 15 or 20 m kits
- Cuttable every 166.67 mm
- Indoor, IP22

STRIP · ELECTRICAL

Voltage	24 V DC (constant voltage)
Power	9 W/m · 45 W per 5 m reel
Density	30 LEDs 5050 RGBW / m
White	3000K · up to 160 lm/m
Beam angle	120°

STRIP · PHYSICAL

Width	10 mm
Cut	Every 166.67 mm (6.5 in)
Rating	IP22, indoor
Lifetime	Up to 25,000 h
Temperature	-25 to 60 °C
Mounting	Double-sided adhesive

CONTROL

Controller	RGBW 24 V
Remote	Infrared (IR)
Wi-Fi	Built-in module, mobile app
Certification	cULus

ORDERING

Build the product code

1 Series

LCKIT-45W-RGBW-30K-IP22 RGBW 3000K strip

2 Length

5M 5 m
10M 10 m
15M 15 m
20M 20 m

EXAMPLE **LCKIT-45W-RGBW-30K-IP22 - 10M**
 RGBW 3000K kit 10 m


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCKIT-45W-RGBW-30K-IP22-10M	10 m kit: 2 reels, 2 × 60 W drivers
LCKIT-45W-RGBW-30K-IP22-15M	15 m kit: 3 reels, 2 × 96 W drivers, 2 controls
LCKIT-45W-RGBW-30K-IP22-20M	20 m kit: 4 reels, 2 × 96 W drivers, 2 controls
LCKIT-45W-RGBW-30K-IP22-5M	5 m kit: 1 reel, 1 × 60 W driver, 1 controller


5 m kit: 1 × 5 m strip, 1 × 60 W 24 V driver, 1 controller with IR remote and Wi-Fi module.

10 m kit: 2 × 5 m strips, 2 × 60 W 24 V drivers, 1 controller with IR remote and Wi-Fi module.

15 and 20 m kits: 3 or 4 × 5 m reels, 2 × 24 V 96 W plug-in drivers, 2 IR / Wi-Fi remote sets.



DIMENSIONS: Ø 4 1/2 × 1 3/4 IN

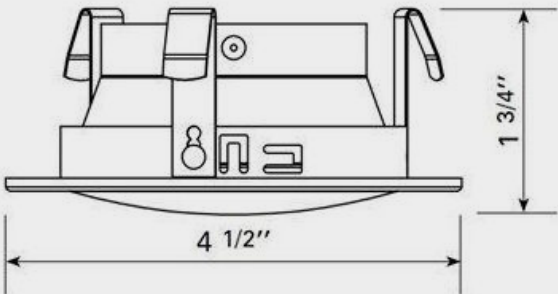

SOFT, GLARE-FREE LIGHT FOR THE SHOWER

Round trim designed for the insulated housing of the GU10 LED bulb, ideal for showers. Its frosted diffuser softens the light, removes glaring reflections and reduces harsh shadows, for subtle, even lighting in the bathroom. Available in black, brushed steel and chrome.

FEATURES

- For insulated GU10 housing
- Wet location (shower)
- Frosted anti-glare diffuser
- Soft, even light
- Black, brushed steel or chrome
- Ø 4 1/2 in

COMPATIBILITY

Bulb	GU10 LED
Housing	Insulated GU10 housing (LCHOUSGU10-358IC)
Use	Shower, bathroom
Location	Wet (shower)

PHYSICAL

Shape	Round
Diameter	4 1/2 in (114 mm)
Height	1 3/4 in (44 mm)
Ceiling cut-out	3 7/8 in (98 mm)
Diffuser	Frosted
Finishes	Black · brushed steel · chrome

ORDERING

Build the product code

1 Series LCTRIM-358-RSH round, shower	2 Finish BK black BS brushed steel CH chrome
---	--

EXAMPLE	LCTRIM-358-RSH	-	BK
	round, shower		black


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTRIM-358-RSH-BK	Round GU10 shower trim, black
LCTRIM-358-RSH-BS	Round GU10 shower trim, brushed steel
LCTRIM-358-RSH-CH	Round GU10 shower trim, chrome


ACCESSORIES

Code	Description	Sold
LCHOUSGU10-358IC	Insulated housing for GU10, 3 5/8 in	each

GU10 bulb and housing sold separately.



DIMENSIONS: 71 × 21 × 22 mm



A NOTIFICATION ON YOUR PHONE AS SOON AS THE DOOR OPENS

Wireless sensor to install near any door that needs more security. When the door opens, it sends a notification to your phone or by email; paired with other smart home products, it can trigger an alarm or turn the lights on. It is controlled through the free mobile app.

FEATURES

- Phone or email notification
- Scenes: alarm, lighting
- 2.4 GHz Wi-Fi, free app
- CR2 3 V battery included
- Adhesive or screw mounting
- 1-year limited warranty

ELECTRICAL

Battery	1 × CR2 3 V (included)
Standby current	13 μ A
Working current	115 to 120 mA

WIRELESS

Frequency	2.4 GHz Wi-Fi
Standard	IEEE 802.11 b/g/n
Encryption	WEP / WPA / WPA2
Range	45 m

PHYSICAL

Main part	71 × 21 × 22 mm (2.75 × 0.875 × 0.875 in)
Magnet part	40 × 11 × 11 mm (1.5 × 0.44 × 0.44 in)
Colour	White
Temperature	0 to 40 °C (32 to 104 °F)
Location	Indoor only
Warranty	1-year limited



ORDERING

Build the product code

1

Code

LCDO-WIFIDOORSENSOR-WH white

EXAMPLE

LCDO-WIFIDOORSENSOR-WH


Wi-Fi door sensor, white

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCDO-WIFIDOORSENSOR-WH	Wi-Fi door contact sensor, white

Included: main part, magnet part, CR2 battery, sticker, screws and anchors.
Required: password-protected 2.4 GHz Wi-Fi network, strong signal; free app for iOS 8.0 and up or Android 4.0 and up.
Pairing: hold the reset button 6 s (EZ mode; 6 more seconds for AP mode).
Complies with Part 15 of the FCC Rules (Class B digital device).





DIMENSIONS: 45 × 45 mm



WATCH A ROOM AND GET ALERTED ON YOUR PHONE

Wireless, directional motion sensor shaped like a magic eye: 110° viewing angle, 4 to 6 m detection. When it detects motion, it sends a notification to your phone or by email; paired with other smart home products, it can trigger an alarm or turn the lights on.

FEATURES

- 110° viewing angle
- 4 to 6 m detection
- Phone or email notification
- Google Home and Amazon Alexa
- CR123A battery, wall holder included
- 1-year limited warranty

ELECTRICAL

Battery	1 × CR123A 3 V
Standby current	13 µA
Working current	120 to 130 mA

WIRELESS

Frequency	2.4 GHz Wi-Fi
Standard	IEEE 802.11 b/g/n
Encryption	WEP / WPA / WPA2
Range	45 m

DETECTION AND PHYSICAL

Viewing angle	110°
Detection distance	4 to 6 m
Dimensions	45 × 45 mm (1 3/4 in)
Colour	White
Temperature	0 to 40 °C (32 to 104 °F)
Location	Indoor only
Warranty	1-year limited



ORDERING

Build the product code

1

Code

LCDO-WIFIMOTIONSENSOR-WH white

EXAMPLE

LCDO-WIFIMOTIONSENSOR-WH

Wi-Fi motion sensor, white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCDO-WIFIMOTIONSENSOR-WH	Wi-Fi motion sensor, white

Included: sensor, CR123A battery, wall holder, sticker, screws and anchors.
Required: password-protected 2.4 GHz Wi-Fi network, strong signal; free app for iOS 8.0 and up or Android 4.0 and up.
Pairing: hold the reset button 6 s (EZ mode; 6 more seconds for AP mode).
Complies with Part 15 of the FCC Rules (Class B digital device).

