

2026 CATALOG

Agricultural Lighting

3 products

5CCT Selectable / Multi-wattage
(3000K/3500K/4000K/5000K/6500K)
(34W/41W/48W/54W/60W)



NEMA 4X / 0-10V Dimmable
(5000K) / (20W)



3CCT Selectable / Multi-wattage
(3000K/4000K/5000K) / (10W/20W)



Updated October 4, 2026


TABLE OF CONTENTS

Agricultural Lighting

	4 FT LED VAPOR TIGHT FIXTURE 34-60 W - NEMA 4X LCVT-4FT-60W-MW	p. 3
	6 IN LED MARINE LIGHT 20 W - NEMA 4X LCMARINE-6IN-20W	p. 5
	LED JELLY JAR LIGHT 10-20 W - 3 CCT LCJJ-20W-MW-3CCT-UV-GR-T	p. 7

5CCT Selectable / Multi-wattage

 (3000K/3500K/4000K/5000K/6500K)
 (34W/41W/48W/54W/60W)

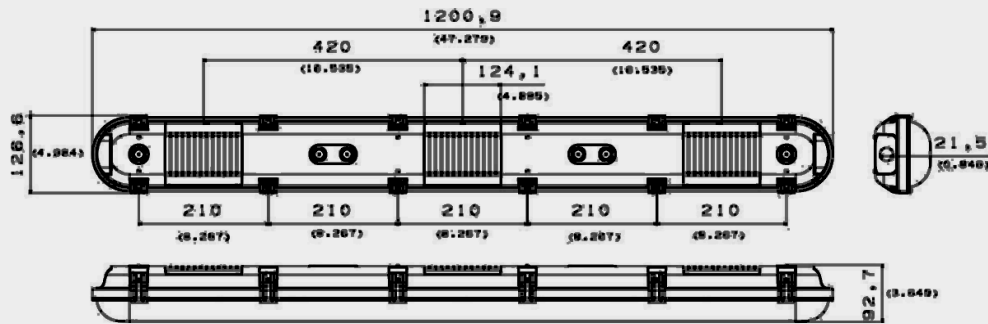DIMENSIONS: 1,201 × 127 × 93 MM (47.3 × 5.0 × 3.6 IN)

IP66 AND NEMA 4X FOR DAMP AND WASHDOWN AREAS

4 ft LED vapor tight fixture for agricultural buildings, garages, warehouses, car washes and parking garages. Power set at installation between 34 and 60 W, up to 9,264 lumens; available in 5000K or with 5 selectable color temperatures. 0-10V dimmable down to 10%, 120-347 V.

FEATURES

- IP66 · NEMA 4X · IK08
- Power: 34 / 41 / 48 / 54 / 60 W
- 5000K, or 5 CCT from 3000K to 6500K
- 0-10V dimmable down to 10%
- Surface or suspended
- 120-347 V · flicker-free

ELECTRICAL

Voltage	120-347 V
Power	Selectable 34 / 41 / 48 / 54 / 60 W
Dimming	0-10V (down to 10%)
Power factor	90% (5000K) · 93% (5CCT)
Surge	2 kV (grounded) · 1 kV (ungrounded)

OPTICAL

Max. flux	8,700 lm (5000K) · 9,264 lm (5CCT)
Efficacy	Up to 145 lm/W (5000K)
Color temperature	5000K, or 3000/3500/4000/5000/6500K
CRI	80 (5000K) · 85 (5CCT)
Beam angle	110°

PHYSICAL

Dimensions	1,201 × 127 × 93 mm
Housing · lens	White polycarbonate · frosted polycarbonate
Ingress · impact	IP66, NEMA 4X · IK08
Mounting	Surface (3 brackets) or suspended
Weight	2.8 kg
Operating temperature	-30 °C to 45 °C
Lifespan	50,000 h (L70)
Certification	cUL, DLC Premium
Warranty	3 years



ORDERING

Build the product code

1 Series LCVT-4FT-60W-MW 4 ft vapor tight, 34 to 60 W	2 Color 50K 5000K 5CCT 3000K to 6500K (5 positions)	3 Code end UV-S
---	---	---------------------------------------

EXAMPLE	LCVT-4FT-60W-MW 4 ft vapor tight, 34-60 W	-	5CCT 3000K to 6500K	-	UV-S 120-347 V
---------	---	---	---	---	--------------------------------------

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCVT-4FT-60W-MW-50K-UV-S	Color temperature : 5000K
LCVT-4FT-60W-MW-5CCT-UV-S	Color temperature : 5CCT selectable


Daisy chain: up to 7 fixtures at 120 V, 10 at 240 V and 15 at 347 V per circuit (supplier sheet).
Replaces 4 ft T8 or T5 fluorescent vapor tight fixtures.
Pre-assembled LED module; suspension cable integrated in the lens.



NEMA 4X / 0-10V Dimmable
 (5000K) / (20W)



DIMENSIONS: Ø 176 MM (6.9 IN) × 111 MM (4.4 IN)

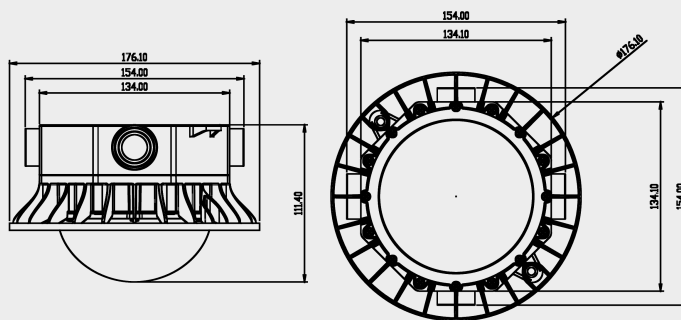

WATERTIGHT AND CORROSION-RESISTANT FOR LIVESTOCK BUILDINGS

6 in LED marine light for barns, hog barns, poultry houses and washdown areas. NEMA 4X certified: it resists dust, hose-down washing and corrosion. 20 W for up to 3,142 lumens, 0-10V dimmable down to 10%, in 3000K or 5000K; junction box included.

FEATURES

- NEMA 4X: watertight and corrosion-resistant
- Up to 170 lm/W · 75,000 h
- 3000K or 5000K
- 0-10V dimmable down to 10%
- Junction box included
- 100-277 V (no 347 V)

ELECTRICAL

Voltage	100-277 V
Power	20 W (actual: 19.2 W in 3000K, 18.4 W in 5000K)
Dimming	0-10V (down to 10%)
Power factor	90%

OPTICAL

Flux	3,060 lm (3000K) / 3,142 lm (5000K)
Efficacy	Up to 170 lm/W
Color temperature	3000K or 5000K
CRI	84
Beam angle	120°

PHYSICAL

Dimensions	Ø 176 × 111 mm (Ø 6.9 × 4.4 in)
Housing · diffuser	Grey die-cast aluminum · frosted polycarbonate
Ingress · impact	NEMA 4X · IK08
Junction box	2 × 3/4 in + 2 × 1/2 in PVC entries
Weight	0.8 kg (3000K) / 0.85 kg (5000K)
Operating temperature	-20 °C to 45 °C
Lifespan	75,000 h (L70)
Certification	cETL, DLC Premium
Warranty	3 years

ORDERING

Build the product code

1 Series

LCMARINE-6IN-20W 6 in marine, 20 W

2 Color

30K-S 3000K

50K-S 5000K

EXAMPLE

LCMARINE-6IN-20W - 50K-S

6 in marine, 20 W

5000K

LCMARINE-DIM-0-10V-S · TRANSLATOR

Function 0-10V "source" to "sink" signal

Modes Automatic or manual

Compatible LED marine lights

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMARINE-6IN-20W-30K-S	Color temperature : 3000K
LCMARINE-6IN-20W-50K-S	Color temperature : 5000K


ACCESSORIES

Code	Description	Sold
LCMARINE-DIM-0-10V-S	0-10V source/sink dimming translator, automatic or manual mode	each


Not suitable for 347 V systems.

Dimming translator: required when the automation controller supplies a "source" 0-10V signal; provide the controller make and model to validate compatibility before ordering.

3CCT Selectable / Multi-wattage
(3000K/4000K/5000K) / (10W/20W)



DIMENSIONS: CEILING 4.3 × 14 IN · WALL 4.3 × 12 IN, 6.8 IN PROJECTION

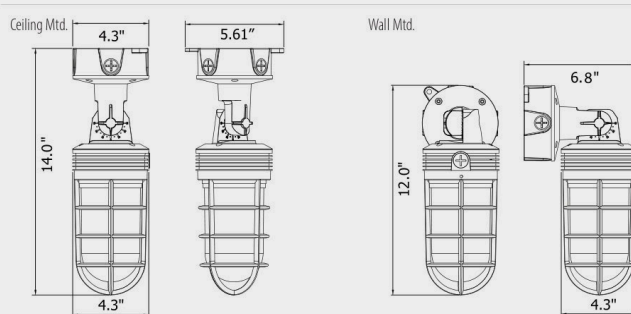

THE BARN AND STABLE CLASSIC, IN LED

LED jelly jar light for barns, stables, sheds, loading docks and warehouses. Frosted globe protected by a wire guard, grey die-cast aluminum housing, adjustable wall or ceiling mount. Power (10 or 20 W) and color temperature (3000K, 4000K, 5000K) set on site; 120-347 V, wet locations.

FEATURES

- Selectable power: 10 or 20 W
- Selectable color: 3000K, 4000K, 5000K
- Frosted globe and wire guard
- Wall or ceiling, adjustable
- 120-347 V · wet location
- cULus · DLC · 5-year warranty

ELECTRICAL

Voltage	120-347 V
Power	Selectable 10 / 20 W
Harmonic distortion	< 20%

OPTICAL

Flux	1,050 / 2,100 lm
Color temperature	3000K / 4000K / 5000K (selectable)
CRI	70 and up

PHYSICAL

Ceiling	4.3 × 14 in
Wall	4.3 × 12 in, 6.8 in projection
Housing	Die-cast aluminum, grey
Globe	Frosted, wire guard
Mounting	Wall or ceiling, adjustable
Location	Wet
Operating temperature	-40 °C to 40 °C
Lifespan	50,000 h (L70)
Certification	cULus, FCC, DLC Standard
Warranty	5 years

ORDERING

Build the product code

1 Code

LCJJ-20W-MW-3CCT-UV-GR-T jelly jar 10/20 W, 3 CCT, grey

EXAMPLE

LCJJ-20W-MW-3CCT-UV-GR-T

10/20 W · 3000/4000/5000K · 120-347 V

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCJJ-20W-MW-3CCT-UV-GR-T	LUMINAIRE LED JAM JAR 10W-20W 3CCT 120-347V – AGRICOLE ET INDUSTRIEL

Direct replacement for incandescent jelly jars.
Special order: lead time confirmed when ordering.