

2026 CATALOG

Integrated LED Fixtures

6 products



5CCT Selectable / Multi-wattage
(3000K/35K/40K/50K/65K) / (34W/38W/45W)



4'

5CCT Selectable / Multi-wattage
(3000K/35K/40K/50K/65K) / (34W/38W/45W)



4'

Updated October 4, 2026


TABLE OF CONTENTS

Integrated LED Fixtures

	LED CABINET LINEAR FIXTURE 1 TO 4 FT 3-16 W - 3CCT LCFIX-CAB-120V-3CCT	p. 3
	LED CABINET LINEAR FIXTURE 14 TO 58 IN 5-22 W - 5CCT LCFIX-LEDBAR-CCT	p. 5
	LED SHOP LIGHT 46 IN 36 W - 5000K LCFIX-PSHOP2-WH-B	p. 7
	LED VAPOR TIGHT FIXTURE 4 & 8 FT 34-95 W - 3CCT LCVT + MW + 3CCT	p. 9
	LED WRAPAROUND LINEAR FIXTURE 2 TO 8 FT 16-90 W - 5CCT LCWRAP-MW-5CCT	p. 11
	LED WRAPAROUND LINEAR FIXTURE 4 FT 34-38-45 W - 5CCT LCWRAP-45W-4CCT-UV-T-4FT	p. 13



DIMENSIONS: 12.32 TO 46.18 IN × 0.91 IN × 1.18 IN

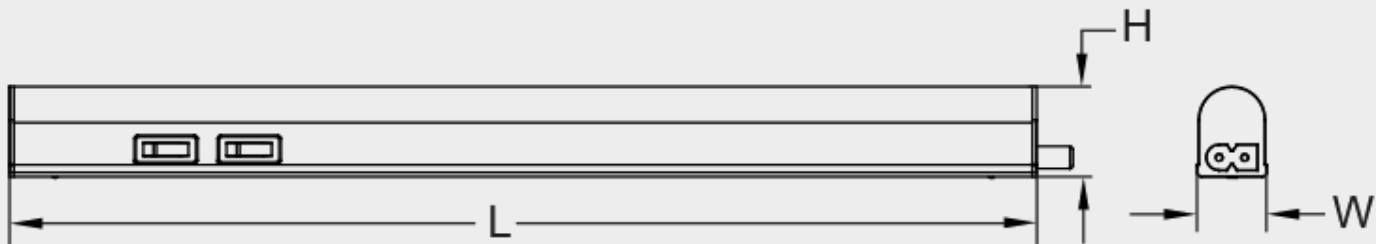

UNDER CABINET AND SHELF, 120 V, 2 POWER LEVELS AND 3 COLORS

Slim LED linear fixture for under-cabinet, shelf, counter and display lighting. Available in 1, 2, 3 and 4 ft, its power (2 positions) and color temperature (3000K, 4000K or 5000K) are set on site. Powered by plug-in cord, it links in series to form continuous runs.

FEATURES

- 4 lengths: 1, 2, 3 and 4 ft
- 2 selectable power levels on the fixture
- 3 color temperatures: 3000K, 4000K, 5000K
- Extruded frosted lens, 120° beam
- Links in series (linking cord included)
- Damp location · ETL

ELECTRICAL		PHYSICAL	
Voltage	120 V, 50/60 Hz	Section	0.91 × 1.18 in
Power	3 to 16 W, 2 positions	Housing	White painted steel
Power feed	61 in cord, 2-prong plug	Lens	Frosted, extruded
Linking	180 W total maximum	Mounting	Surface or side (clips)
		Location	Damp · IP20
		Temperature	-25 °C to +45 °C
		Lifespan	50,000 h
		Certification	ETL, FCC, RoHS
		Warranty	5 years
OPTICAL			
Color temperature	3000 / 4000 / 5000K		
Flux	315 to 1680 lm		
Efficacy	Up to 105 lm/W		
CRI	≥ 80		
Beam angle	120°		



ORDERING

Build the product code

1 Series

LCFIX-CAB-120V-3CCT 120 V, 3CCT

2 Length

1FT 1 ft
2FT 2 ft
3FT 3 ft
4FT 4 ft

EXAMPLE

LCFIX-CAB-120V-3CCT - 2FT

120 V, 3CCT2 ft

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCFIX-CAB-120V-3CCT-1FT	1 ft · 12.32 in · 5 / 3 W · 525 / 315 lm
LCFIX-CAB-120V-3CCT-2FT	2 ft · 22.56 in · 9 / 5.5 W · 945 / 578 lm
LCFIX-CAB-120V-3CCT-3FT	3 ft · 34.37 in · 12 / 7.5 W · 1260 / 788 lm
LCFIX-CAB-120V-3CCT-4FT	4 ft · 46.18 in · 16 / 9.5 W · 1680 / 998 lm

Supplied with each fixture: 2 L clips, 2 U clips, 2 screws, 2 anchors, 1 end cap, 1 linking cord 11.42 in, 1 power cord 61 in.
Power and color temperature switches on the side of the fixture.





DIMENSIONS: 13 1/2 TO 58 IN × 1 IN × 1 5/16 IN

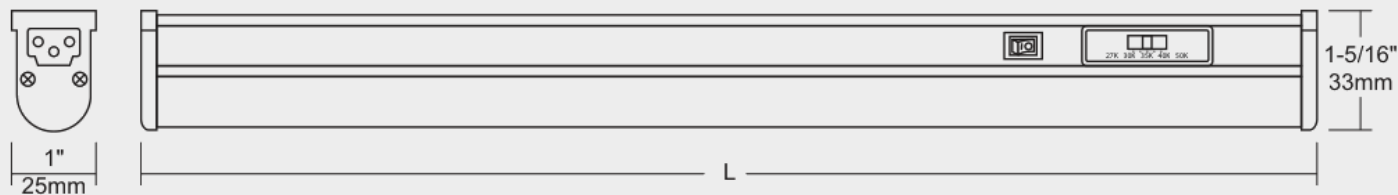

UNDER CABINET, COVE AND MILLWORK, 120 V DIMMABLE

Extruded aluminum LED linear fixture with frosted lens, for coves, under-cabinet and millwork. Five lengths, from 13 1/2 to 58 in. An on/off switch and a 5-position color temperature selector (2700K to 5000K) are on the fixture. TRIAC / ELV dimmable from 100 to 0%; links without shadow up to 300 W.

FEATURES

- 5 lengths: 13 1/2 to 58 in, 5 to 22 W
- 5 CCT selector: 2700K to 5000K
- On/off switch on the fixture
- TRIAC / ELV dimmable, 100 to 0%
- CRI 90+, 125° beam
- Closet approved · cULus

ELECTRICAL

Voltage	120 V, 50/60 Hz
Power	5 to 22 W
Dimming	TRIAC / ELV, 100-0%
Power factor	> 0.95
Connection	3-wire
Linking	2500 mA / 300 W max.

OPTICAL

Color temperature	2700 / 3000 / 3500 / 4000 / 5000K
Flux	Up to 1800 lm
Efficacy	Up to 96 lm/W
CRI	90+
Beam angle	125°

PHYSICAL

Section	1 × 1 5/16 in (25 × 33 mm)
Housing	Extruded aluminum
Location	Dry
Temperature	-18 °C to 40 °C
Lifespan	36,000 h · 70% at 60,000 h
Certification	cULus
Warranty	3 years



ORDERING

Build the product code

1 Series LCFIX-LEDBAR linear fixture	2 Length 14IN 13 1/2 in 23IN 22 5/8 in 34IN 34 7/16 in 46IN 46 3/16 in 58IN 58 in	3 Color CCT 5 CCT selectable
--	---	--

EXAMPLE	LCFIX-LEDBAR - 34IN - CCT
	linear 34 7/16 in 5 CCT

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCFIX-LEDBAR-14IN-CCT	13 1/2 in (343 mm) · 5 W · 400 lm at 3000K
LCFIX-LEDBAR-23IN-CCT	22 5/8 in (574 mm) · 9 W · 775 lm at 3000K
LCFIX-LEDBAR-34IN-CCT	34 7/16 in (874 mm) · 14 W · 1175 lm at 3000K
LCFIX-LEDBAR-46IN-CCT	46 3/16 in (1174 mm) · 18 W · 1500 lm at 3000K
LCFIX-LEDBAR-58IN-CCT	58 in (1474 mm) · 22 W · 1800 lm at 3000K

Included: fixture, end cap, joiner, mounting hardware (horizontal surface or wall). Power feed (cord or wiring box) not included.
Flux per length at 2700K: 250 / 550 / 850 / 1000 / 1200 lm; at 3500K: 350 / 705 / 1120 / 1400 / 1600 lm; 3000K, 4000K and 5000K: 400 / 775 / 1175 / 1500 / 1800 lm.
Closet approved (NFPA 70, NEC 410.16 (A)(1)); keep 6 in clearance from combustible materials. Not intended for recessed ceiling installation.





DIMENSIONS: 46 3/4 x 3 3/4 x 1 5/8 IN · 16 IN CHAIN

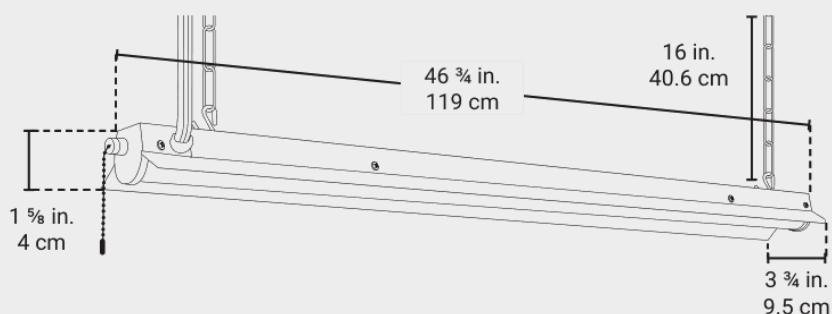

READY TO HANG AND PLUG IN: CHAIN, CORD AND PULL SWITCH

46 in integrated LED shop light for workshops, garages and work areas. 3200 lumens at 5000K for 36 W, angled diffuser for even light. Ships with a 16 in hanging chain, power cord and pull switch: no channel or wiring to plan.

FEATURES

- 3200 lm for 36 W
- 5000K neutral white
- Angled diffuser, even light
- 16 in chain, cord and pull switch included
- White metal housing
- 50,000 h lifespan

ELECTRICAL

Voltage	120 V
Power	36 W
Dimming	No
Control	Pull switch
Power feed	Cord included

OPTICAL

Flux	3200 lm
Color temperature	5000K
Diffuser	Angled, white

PHYSICAL

Length	46 3/4 in (119 cm)
Width	3 3/4 in (9.5 cm)
Height	1 5/8 in (4 cm)
Structure	White metal
Hanging	16 in chain (40.6 cm)
Lifespan	50,000 h
Certification	cETLus, FCC



ORDERING

Build the product code

1 Code

LCFIX-PSHOP2-WH-B

EXAMPLE

LCFIX-PSHOP2-WH-B

example


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCFIX-PSHOP2-WH-B	46 in · 36 W · 3200 lm · 5000K · white

Sold by the box: 1 fixture per box.
Hangs from the supplied chain; plugs into a receptacle.



DIMENSIONS: 48 IN OR 94.3 IN × 3.9 IN × 3.3 IN

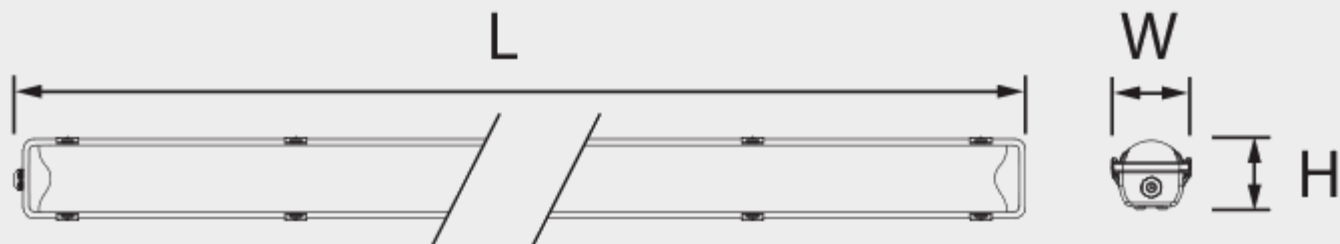

IP66 AND NEMA 4X, ADJUSTABLE POWER AND COLOR

Vapor tight fixture for warehouses, factories, parking garages and wet or wash-down areas. One-piece polycarbonate housing with gasket, impact-resistant prismatic lens (IK10) and 304 stainless steel latches. Power (3 positions) and color temperature (3500K, 4000K, 5000K) are set at installation; 120-347 V driver, 0-10 V dimmable.

FEATURES

- IP66, wet location, NEMA 4X, NSF
- 3 selectable power levels per fixture
- 3 CCT: 3500K, 4000K, 5000K
- IK10 UV-stabilized polycarbonate lens
- 120-347 V, 0-10 V dimmable
- Operates from -40 °C to +40 °C

ELECTRICAL

Voltage	120-347 V, auto-sensing
Power 4 ft	34 / 41 / 48 W
Power 8 ft	67 / 83 / 95 W
Dimming	0-10 V

OPTICAL

Color temperature	3500 / 4000 / 5000K
Flux 4 ft	5000 / 5800 / 7025 lm
Flux 8 ft	10,100 / 12,000 / 13,860 lm
CRI	> 80
Beam angle	110°

PHYSICAL

Housing	Polycarbonate + gasket
Lens	Prismatic polycarbonate IK10
Latches	304 stainless steel
Mounting	Surface or suspended
Temperature	-40 °C to +40 °C
Lifespan	50,000 h
Certification	DLC, ETL, NEMA 4X, NSF
Warranty	5 years

LOCATION RATING · IP66

Dry

Damp (covered)

Wet



ORDERING

Build the product code

1 Length and power LCVT-4FT-48W 4 ft, 34-48 W LCVT-8FT-95W 8 ft, 67-95 W	2 Settings MW selectable power 3CCT / CCT 3500K, 4000K, 5000K	3 Voltage 120-347V
---	--	--

EXAMPLE	LCVT-4FT-48W	-	MW-3CCT	-	120-347V
	4 ft, 48 W max.		selectable, 3 CCT		voltage

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCVT-4FT-48W-MW-3CCT-120-347V	4 ft · 48 in · 34 / 41 / 48 W · 5000 / 5800 / 7025 lm
LCVT-8FT-95W-MW-CCT-120-347V	8 ft · 94.3 in · 67 / 83 / 95 W · 10,100 / 12,000 / 13,860 lm

Surface or suspended mounting with the supplied clamps.
The 4 ft 34-60 W vapor tight fixture (LCVT-4FT-60W) has its own sheet.



5CCT Selectable / Multi-wattage
(3000K/35K/40K/50K/65K) / (34W/38W/45W)




4'




DIMENSIONS: L 22.2 / 35.0 / 47.3 / 94.2 IN × 2.8 IN × 3.1 IN

L: 2FT (22.2") / 3FT (35.0") / 4FT (47.3") / 8FT (94.2")

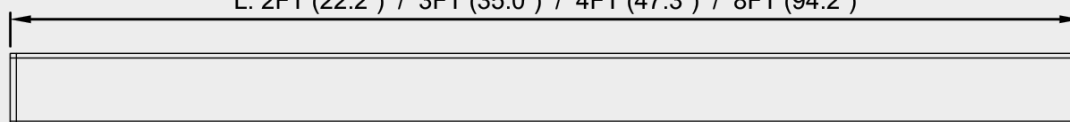

W: 2.8"



H: 3.1"

POWER AND COLOR SET ON SITE, 120-347 V

LED linear fixture with white painted steel housing and PMMA opal lens, in 2, 3, 4 and 8 ft, for warehouses, workshops, garages, basements, corridors and stores. Three power levels and five color temperatures (3000K to 6500K) are set at installation. Auto-sensing 120-347 V driver, 0-10 V dimmable, approved for damp locations.

FEATURES

- 4 lengths: 2, 3, 4 and 8 ft
- 3 selectable power levels per fixture
- 5 CCT: 3000K to 6500K
- PMMA opal lens, 120° beam
- 120-347 V, 0-10 V dimmable
- Damp location · cULus · DLC

ELECTRICAL

Voltage	120-347 V, auto-sensing
Power	16 to 90 W, 3 positions
Dimming	0-10 V

OPTICAL

Color temperature	3000 / 3500 / 4000 / 5000 / 6500K
Flux	2080 to 11,700 lm
CRI	> 80
Beam angle	120°
Lens	PMMA opal

PHYSICAL

Section	2.8 × 3.1 in
Housing	White painted steel
Mounting	Surface or suspended (chain)
Location	Damp
Temperature	-20 °C to +50 °C
Lifespan	100,000 h (L70)
Certification	cULus, DLC
Warranty	5 years

ORDERING

Build the product code

1

Max. power

LCWRAP-20W 2 ft
LCWRAP-25W 3 ft
LCWRAP-45W 4 ft
LCWRAP-90W 8 ft

2

Settings

MW-5CCT 3 power levels, 5 CCT

3

Length

UV-T-2FT 2 ft
UV-T-3FT 3 ft
UV-T-4FT 4 ft
UV-8FT 8 ft

EXAMPLE

LCWRAP-45W

-

MW-5CCT

-

UV-T-4FT

45 W max.

selectable, 5 CCT

4 ft

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWRAP-20W-MW-5CCT-UV-T-2FT	2 ft · 22.2 in · 16 / 18 / 20 W · 2080 / 2340 / 2600 lm
LCWRAP-25W-MW-5CCT-UV-T-3FT	3 ft · 35.0 in · 17 / 21 / 25 W · 2210 / 2730 / 3250 lm
LCWRAP-45W-MW-5CCT-UV-T-4FT	4 ft · 47.3 in · 34 / 38 / 45 W · 4420 / 4940 / 6075 lm
LCWRAP-90W-MW-5CCT-UV-8FT	8 ft · 94.2 in · 65 / 75 / 90 W · 8450 / 9750 / 11,700 lm

ACCESSORIES

Code	Description	Sold
LCWRAPACC-SUSPENSION	Suspension kit for wraparound fixture	per box

Two-piece junction box cover plate included.
The 4 ft wraparound LCWRAP-45W-4CCT-UV-T-4FT has its own sheet.


5CCT Selectable / Multi-wattage
 (3000K/35K/40K/50K/65K) / (34W/38W/45W)



5CCT Selectable / Multi-wattage
 (3000K/35K/40K/50K/65K) / (34W/38W/45W)



DIMENSIONS: 47.3 × 2.8 × 3.1 IN

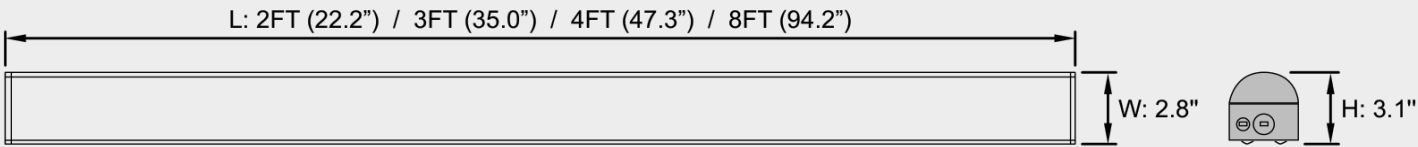

POWER AND COLOR SET ON SITE, 120-347 V

4 ft LED linear fixture with white painted steel housing and PMMA opal lens, for warehouses, workshops, garages, basements and corridors. Three power levels (34, 38 or 45 W) and five color temperatures (3000K to 6500K) are set at installation. Auto-sensing 120-347 V driver, 0-10 V dimmable, approved for damp locations.

FEATURES

- 3 power levels: 34, 38 or 45 W
- Up to 6075 lm
- 5 CCT: 3000K to 6500K
- PMMA opal lens, 120° beam
- 120-347 V, 0-10 V dimmable
- Damp location · cULus

ELECTRICAL

Voltage	120-347 V, auto-sensing
Power (selectable)	45 W / 38 W / 34 W
Dimming	0-10 V

OPTICAL

Flux (per power level)	6075 / 4940 / 4420 lm
Color temperature	3000 / 3500 / 4000 / 5000 / 6500K
CRI	> 80
Beam angle	120°
Lens	PMMA opal

PHYSICAL

Dimensions	47.3 × 2.8 × 3.1 in
Housing	White painted steel
Mounting	Surface or suspended (chain)
Location	Damp
Temperature	-20 °C to +50 °C
Lifespan	100,000 h (L70)
Certification	cULus



ORDERING

Build the product code

1

Code

LCWRAP-45W-4CCT-UV-T-4FT

EXAMPLE

LCWRAP-45W-4CCT-UV-T-4FT

example

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWRAP-45W-4CCT-UV-T-4FT	4 ft · 47.3 in · 34 / 38 / 45 W · 4420 / 4940 / 6075 lm

Two-piece junction box cover plate included.
Same housing as the 4 ft wraparound LCWRAP-45W-MW-5CCT-UV-T-4FT (sheet LCWRAP-MW-5CCT).