

2026 CATALOG

Landscape Lighting

11 products



Updated October 4, 2026


TABLE OF CONTENTS

Landscape Lighting

	120 V PHOTOCELL 1/2 IN THREAD - cCSAus LCACC120V-K4121C	p. 3
	LED LANDSCAPE COB SPOTLIGHT 3 W - IP65 LCAP-PIC0V2-12-24V-3W	p. 5
	LED LANDSCAPE LIGHTING ACCESSORIES LCJUNCBOX + LCCON + LCMARETTE + LCWIRE + LCAP	p. 7
	LED LANDSCAPE MUSHROOM PATH LIGHT 2 W LCAP-SC00P-12-24V-2W-3000K	p. 9
	LED LANDSCAPE PATH LIGHT 3 W - IP67 LCAP-LLIGHT-24V3W	p. 11
	LED LANDSCAPE SOLAR FLOOR LAMP 15 IN AND 19 IN LCAP-F19287	p. 13
	LED LANDSCAPE SPOTLIGHT 3 W - IP65 LCAP-PIC012-24V3W	p. 15
	LED LANDSCAPE SPOTLIGHT 9 W - IP65 LCAP-PIC012-24V9W	p. 17
	LED LANDSCAPE STEP LIGHT 2.5 W - WET LOCATION LCAP-STRL2	p. 19
	LED LANDSCAPE STEP LIGHT 3 W WITH SENSOR - WET LOCATION LCAP-STRL3MT	p. 21
	LED LANDSCAPE WIDE-BEAM FLOODLIGHT 20 W AND 30 W - 24 V LCFLD24V	p. 23



STEM MOUNTING (GASKET AND NUT) OR ON A BOX · 76.2 × 39.7 × 39.7 MM

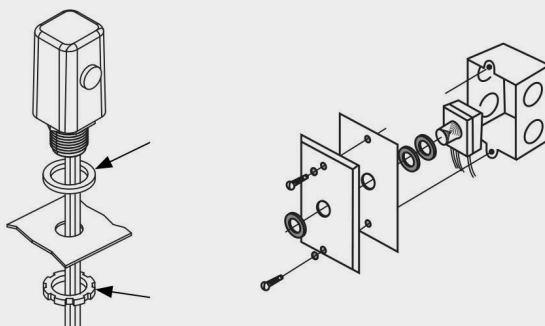

TURNS OUTDOOR LIGHTING ON FROM DUSK TO DAWN

cCSAus certified, UL listed 120 V photocontrol to automate residential and commercial outdoor lighting. Its cadmium sulfide sensor turns fixtures on at nightfall and off at daybreak; a built-in delay prevents switching from headlights or lightning.

FEATURES

- 120 V / 60 Hz
- Dusk to dawn, hands-free
- Delay against headlights and lightning
- Fixed 1/2 in-14 NPSM thread
- Sealing washer and lock nut included
- cCSAus · UL listed

ELECTRICAL

Voltage	120 V / 60 Hz
Tungsten load	15 A, 1,800 W
Ballast load	8.3 A, 1,000 VA
Compatible loads	Incandescent, fluorescent, HID (not LED)
Sensor	Cadmium sulfide (CdS)
Switching	Bimetallic switch
Delay	30 to 90 s
Turn on / off	1-5 fc / 3-15 fc
Certification	cCSAus, UL

PHYSICAL

Dimensions (H × W × D)	76.2 × 39.7 × 39.7 mm
Thread	1/2 in-14 NPSM, fixed
Mounting	1/2 in thread or 7/8 in knockout
Leads	#18 AWG, 9 in (23 cm)
Housing	Grey polycarbonate, weather resistant
Operating temperature	-40 °C to +70 °C
Included	Sealing washer, lock nut

WIRING

Black lead	Live line
Red lead	Fixture
White lead	Neutral



ORDERING

Build the product code

1

Code

LCACC120V-K4121C 120 V photocell

EXAMPLE


LCACC120V-K4121C

120 V photocell


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCACC120V-K4121C	120 V photocell, fixed 1/2 in thread, cCSAus

Not compatible with LED fixtures per the manufacturer: for incandescent, fluorescent or HID loads.
Applications: landscape lighting (floodlights, bollards, path lights), façades and garages, soffits and roof edges, parking lots and commercial entrances.



DIMENSIONS: 45 × 138 mm · 168 mm STAKE



COB SPOTLIGHT 490 LUMENS, CRI > 85, 24° BEAM

Outdoor spotlight with an integrated COB LED for lighting plants and shrubs. It draws 3 W for 490 lumens, with a CRI above 85, a 24° beam and 90° rotation. Die-cast aluminum body, black powder finish, plastic stake included. Available in 4000K and RGBW-3000K.

FEATURES

- 3 W · 490 lumens · COB
- CRI > 85
- 24° beam
- 90° rotation
- IP65 · cETLus
- Plastic stake included

ELECTRICAL

Voltage	12 V AC/DC or 24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Luminous flux	490 lm
LED type	COB
CRI	> 85
Available colors	4000K · RGBW-3000K
Projection angle	24°
Rotation	90°
Lifespan	30,000 h

PHYSICAL

Width	45 mm
Height	138 mm
Stake	168 mm, plastic
Body	Die-cast aluminum
Finish	Black powder coat
Operating temperature	-25 °C to +60 °C
Warranty	2 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✗ Wet

ORDERING

Build the product code

1 Series

LCAP-PICOV2-12-24V-3W 3 W COB

2 Color

4000K neutral white

RGBW-3000K RGB + warm white

EXAMPLE

LCAP-PICOV2-12-24V-3W - 4000K

3 W COB

4000K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-PICOV2-12-24V-3W-4000K	Color temperature : 4000K
LCAP-PICOV2-12-24V-3W-RGBW-3000K	Color temperature : RGBW-3000K

ACCESSORIES

	Code	Description	Sold
	LCWIRE-OUTD00R100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
	LCWIRE-OUTD00R-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
	LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
	LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
	LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each

Designed for lighting plants and shrubs; for more output, see the 9 W spotlight (LCAP-PICO-24V-9W-3000K).



THE ACCESSORIES



LCAP-G16762T



LCCON-POWER-2PIN



LCJUNCBOX-EXT-IP68



LCMARETTEEXT



LCWIRE-OUTDOOR-185



LCWIRE-OUTDOOR100

CONNECT, PROTECT AND POWER AN OUTDOOR INSTALLATION

The accessories of the LED landscape lighting range: outdoor wires, waterproof connectors, IP68 junction box and outdoor transformer. They are used to connect, protect and power 12 V / 24 V low-voltage fixtures exposed to water, dust and weather.

FEATURES

- IP68 junction box
- IP68 waterproof connector, 2 pins
- Wire nut with dielectric silicone
- 18/2 wire, 100 ft roll
- 18-5 direct burial wire, per foot
- Outdoor transformer 100 W, 12 V

LCJUNCBOX-EXT-IP68 · JUNCTION BOX

IP rating	IP68, prolonged immersion
Cable entries	With sealing gaskets
Cable diameter	4-8 mm

LCCON-POWER-2PIN · CONNECTOR

Type	SP21, 2 pins, screw-locking
IP rating	IP68
Cable	Ø 4.5-7 mm, 18 AWG 2-conductor
Compatibility	LED 12 V / 24 V

LCMARETTEEXT · WIRE NUT

Filling	Dielectric silicone, does not harden
Installation	Direct burial
Dimensions	24 mm × Ø 14 mm
Sold	Pack of 2

LCWIRE-OUTDOOR100 · 18/2 WIRE

Conductors	18/2
Length	100 ft roll
Use	Outdoor 12 V, UV, direct burial

ORDERING

Build the product code

1 Code

LCJUNCBOX-EXT-IP68
 LCCON-POWER-2PIN
 LCMARETTEEXT
 LCWIRE-OUTDOOR100
 LCWIRE-OUTDOOR-185
 LCAP-G16762T

EXAMPLE **LCWIRE-OUTDOOR-185**
 18-5 wire per foot

LCWIRE-OUTDOOR-185 · 18-5 WIRE

Conductors	5 × 18 AWG, unshielded
Jacket	PVC, -40 °C to +90 °C, UV
Installation	Direct burial, no conduit
Sold	Per foot

LCAP-G16762T · TRANSFORMER

Power	100 W
Input	120 V, GFCI receptacle
Output	12 V AC
Finish	Black


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-G16762T	Wattage : 100W · Color : Black
LCCON-POWER-2PIN	CONNECTEUR DE CÂBLE D'ALIMENTATION IP68 SP21 - 2 BROCHES
LCJUNCBOX-EXT-IP68	—
LCMARETTEEXT	Type : Extérieur
LCWIRE-OUTDOOR-185	FIL - CÂBLE EXTÉRIEUR NON BLINDÉ POUR ENFOUISSEMENT DIRECT (PRIX AU PIED)
LCWIRE-OUTDOOR100	FIL EXTÉRIEUR AMÉNAGEMENT PAYSAGER - 18/2 - 100 PIEDS

Wire nut: use with the IP68 outdoor junction box for maximum protection.

18-5 wire: for multi-zone and RGB-W installations at 12 V / 24 V.

Transformer: powers recessed spots, bollards and path lights at 12 V; photocell and 4 / 6 / 8 h timer; 11 × 16 × 9 cm; operates from -30 °C to 40 °C; mount at least 40 in above the ground.

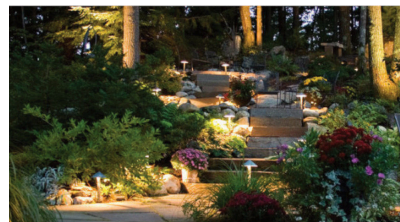

COMPONENTS: Ø 152 MM (6 IN) CAP · STEM WITH STAKE · REPLACEABLE G4 BULB



MUSHROOM-SHAPED PATH LIGHT, REPLACEABLE LED MODULE

2 W mushroom-shaped outdoor fixture to mark paths and walkways and highlight gardens, patios and flower beds. Its 3000K light is soft and warm. Its LED module is replaceable and its materials are weather resistant.

FEATURES

- 2 W · 315 lumens
- 3000K, warm white
- Replaceable LED module
- Black finish
- ETL certified
- For paths, gardens and patios

ELECTRICAL

Voltage	12 V AC/DC or 24 V DC
Power	2 W
Light source	G4 COB bulb, replaceable

OPTICAL

Luminous flux	315 lm
Color temperature	3000K

PHYSICAL

IP rating	IP67
Finish	Black
Cap	Ø 152 mm (6 in)
Housing	Powder-coated aluminum
Mounting	Stem with ground stake

ORDERING

Build the product code

1 Code

LCAP-SCOOP-12-24V-2W-3000K 2 W 3000K

EXAMPLE

LCAP-SCOOP-12-24V-2W-3000K


2 W · 3000K

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCAP-SCOOP-12-24V-2W-3000K	Color temperature : 3000K

ACCESSORIES

	Code	Description	Sold
	LCWIRE-OUTD00R100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
	LCWIRE-OUTD00R-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
	LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
	LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
	LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each



DIMENSIONS: HEIGHT 407 mm · 210 mm STAKE



L-SHAPED PATH LIGHT, 24 V DC, 255 LUMENS

L-shaped outdoor fixture for paths, walkways and gardens. It draws 3 W for 255 lumens, with an etched lens and a 120° projection angle. It runs on 24 V DC and is staked into the ground with the included stake. Available in 3000K and 4000K.

FEATURES

- 3 W · 255 lumens
- 3000K or 4000K
- 120° projection angle
- 24 V DC, dimmable
- IP67 · wet location · ETL
- Installation stake included

ELECTRICAL

Voltage	24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Luminous flux	255 lm
Color temperature	3000K · 4000K
Projection angle	120°
Lifespan	30,000 h

PHYSICAL

Height	407 mm (16 in)
Width	62 mm
Housing	Stainless steel
Stake	210 mm, aluminum
Color	Black
Operating temperature	-25 °C to +60 °C
Warranty	3 years

LOCATION RATING · IP67



Dry



Damp
(covered)



Wet

ORDERING

Build the product code

1 Series

LCAP-LLIGHT-24V3W 24 V 3 W

2 Color

3000K warm white

4000K neutral white

EXAMPLE **LCAP-LLIGHT-24V3W - 3000K**

 24 V 3 W 3000K

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCAP-LLIGHT-24V3W-3000K	Color temperature : 3000K
LCAP-LLIGHT-24V3W-4000K	Color temperature : 4000K

ACCESSORIES


Code	Description	Sold
 LCWIRE-OUTD00R100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
 LCWIRE-OUTD00R-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
 LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
 LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
 LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each

Powered by a 24 V DC transformer.

Follow the applicable electrical codes during installation.



DIMENSIONS: 19 IN (BEIGE) 330 × 479 mm · 15 IN (BLACK) 292 × 372 mm



SOLAR FLOOR LAMP, NO WIRING

Outdoor solar lamp with a wicker structure for gardens, terraces and walkways. Its 25 warm white LEDs are recharged during the day by a solar panel on top and a lithium-ion battery. It is placed without any electrical connection and controlled by an on/off button. Available in beige (19 in) and black (15 in).

FEATURES

- 25 warm white LEDs
- Solar panel 5 V 180 mA
- Li-ion battery 3.7 V 1,200 mAh (18650)
- On/off button
- No electrical wiring
- 30,000 h lifespan

SOURCE AND POWER

Light source	25 integrated LEDs, warm white
Solar panel	Polycrystalline silicon, 5 V 180 mA
Battery	1 × Li-ion 18650, 3.7 V 1,200 mAh
Control	On/off button
Lifespan	30,000 h

PHYSICAL

Beige (BG)	330 × 330 × 479 mm (13 × 13 × 18 7/8 in)
Black (BK)	292 × 292 × 372 mm (11 1/2 × 11 1/2 × 14 5/8 in)
Structure	Wicker



ORDERING

Build the product code

1 Series

LCAP-F19287 solar lamp

2 Finish

BG beige, 19 in

BK black, 15 in

EXAMPLE

LCAP-F19287

-

BK

solar lamp

black 15 in

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCAP-F19287BG	Color : Beige
LCAP-F19287BK	Color : Black

Place the solar panel in the sun and do not cover it; after a long period of non-use, recharge in sunlight.





INSTALLATION EXAMPLE · Ø 42 × 118 mm · 168 mm STAKE

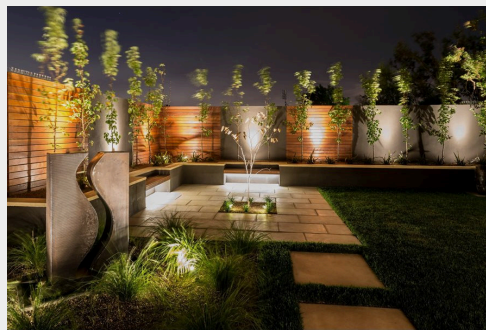

SMALL ADJUSTABLE SPOTLIGHT, WHITE, RGB OR RGBW

Compact outdoor spotlight for lighting plants, shrubs, terraces and walkways. It draws 3 W for 240 lumens in white, with a 45° beam and 180° rotation. It mounts on a flat surface or is staked into the ground with the supplied stake. Available in 3000K, 4000K, RGB, RGBW-3000K and RGBW-4000K.

FEATURES

- 3 W · 240 lumens (white)
- 3000K · 4000K · RGB · RGBW
- 45° beam, 180° rotation
- Dimmable
- IP65 · -20 °C to +40 °C
- Surface or stake mount (stake supplied)

ELECTRICAL

Voltage	24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Luminous flux	240 lm (white) · 135 lm (RGBW) · 120 lm (RGB)
Colors	3000K · 4000K · RGB · RGBW-3000K · RGBW-4000K
Projection angle	45°
Rotation	180°
Lifespan	30,000 h

PHYSICAL

Dimensions	Ø 42 × 118 mm
Stake	168 mm, aluminum
Color	Black
Operating temperature	-20 °C to +40 °C
Warranty	2 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✗ Wet

ORDERING

Build the product code

1 Series LCAP-PICO12-24V3W 3 W	2 Color 3000K warm white 4000K neutral white RGB RGBW-3000K RGBW-4000K
---	---

EXAMPLE	LCAP-PICO12-24V3W - RGBW-3000K
	3 W RGB + 3000K white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-PICO12-24V3W-3000K	Color temperature : 3000K
LCAP-PICO12-24V3W-4000K	Color temperature : 4000K
LCAP-PICO12-24V3W-RGB	Color temperature : RGB
LCAP-PICO12-24V3W-RGBW-3000K	Color temperature : RGBW-3000K
LCAP-PICO12-24V3W-RGBW-4000K	Color temperature : RGBW-4000K


ACCESSORIES

Code	Description	Sold
 LCWIRE-OUTDOOR100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
 LCWIRE-OUTDOOR-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
 LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
 LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
 LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each

Designed for lighting plants and shrubs; for more output, see the 9 W spotlight (LCAP-PICO-24V-9W-3000K).



DIMENSIONS: Ø 99 × 138 mm · 168 mm STAKE

**ADJUSTABLE SPOTLIGHT, 720 LUMENS, 180° ROTATION**

Outdoor spotlight to highlight façades, trees, sculptures and architectural details. Its nine 1 W LEDs deliver 720 lumens and the head rotates 180°. It runs on low voltage and is secured in the ground with the supplied stake. Black aluminum body, available in 3000K and 4000K.

FEATURES

- 9 W · 720 lumens
- 3000K or 4000K
- Nine 1 W LEDs
- 180° rotation
- IP65 · -20 °C to +40 °C
- Stake supplied

ELECTRICAL

Voltage	24 V DC
Power	9 W (9 × 1 W)
Dimmable	Yes
Power lead	0.4 m, no connector

OPTICAL

Luminous flux	720 lm
Color temperature	3000K · 4000K
Projection angle	25°
Rotation	180°
Lifespan	30,000 h

PHYSICAL

Dimensions	Ø 99 × 138 mm
Stake	168 mm, aluminum
Body	Aluminum
Color	Black
Operating temperature	-20 °C to +40 °C
Warranty	2 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✗ Wet

ORDERING

Build the product code

1 Full code

LCAP-PICO-24V-9W-3000K 3000K

LCAP-PICO12-24V9W-4000K 4000K

EXAMPLE **LCAP-PICO-24V-9W-3000K**
9 W · 3000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-PICO-24V-9W-3000K	Color temperature : 3000K
LCAP-PICO12-24V9W-4000K	Color temperature : 4000K

ACCESSORIES

Code	Description	Sold
 LCWIRE-OUTD00R100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
 LCWIRE-OUTD00R-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
 LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
 LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
 LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each

The two colors do not share the same code pattern: order by the full code.

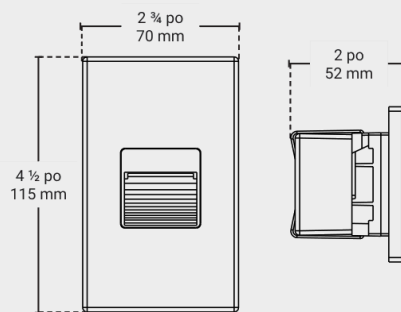**DIMENSIONS: 70 × 52 × 115 mm****RECESSED STAIR LIGHT, VERTICAL OR HORIZONTAL MOUNTING**

Recessed stair light with integrated LEDs for stairs and steps, indoors and outdoors. It draws 2.5 W for 70 lumens in 3000K warm white. Aluminum construction with a frosted acrylic lens; it mounts vertically or horizontally on a 2 × 4 in junction box. Suitable for wet locations.

FEATURES

- 2.5 W · 70 lumens · 3000K
- Aluminum, frosted acrylic lens
- Vertical or horizontal mounting
- Wet locations
- Direct contact with insulation (IC)
- cETLus certified

ELECTRICAL

Voltage	120 V
Power	2.5 W

OPTICAL

Luminous flux	70 lm
Color temperature	3000K
Lifespan	25,000 h

PHYSICAL

Length	70 mm (2 ¾ in)
Width	52 mm (2 in)
Height	115 mm (4 ½ in)
Mounting	Recessed, 2 × 4 in junction box
Construction	Aluminum, frosted acrylic lens
Finish	White · black



ORDERING

Build the product code

1 Series

LCAP-STRL2 2.5 W

2 Finish

WH white

BK black

EXAMPLE

LCAP-STRL2 - WH

2.5 W

white

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCAP-STRL2-BK	Color : Black
LCAP-STRL2-WH	Color : White

To be installed by a certified electrician, according to applicable codes.
Rated for insulated ceilings, direct contact with insulation.





DIMENSIONS: 120 × 37 × 76 mm

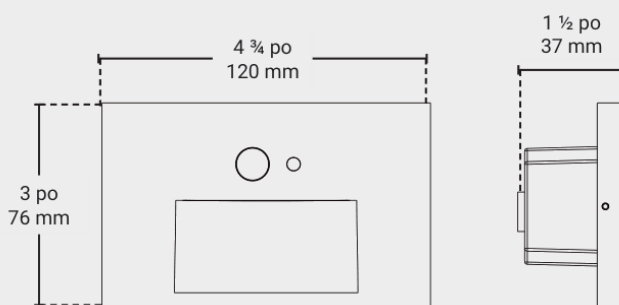

STAIR LIGHT WITH PHOTOCELL AND MOTION SENSOR

Recessed stair light with integrated LEDs, for indoor and outdoor use. Its pre-installed photocell turns it on when it is dark; its motion sensor turns it on when someone passes and off after 1 minute without motion. It draws 3 W for 85 lumens in 3000K warm white. Suitable for wet locations.

FEATURES

- 3 W · 85 lumens · 3000K
- Dusk-to-dawn photocell
- Motion sensor, off after 1 min
- Indoor and outdoor
- Wet locations
- cETLus · 5-year warranty

ELECTRICAL

Voltage	120 V
Power	3 W

OPTICAL

Luminous flux	85 lm
Color temperature	3000K
Lifespan	25,000 h

SENSING

Motion	PIR sensor, off after 1 min
Detection angle	45°
Detection distance	2.5 m (8 ft)
Light	Pre-installed photocell

PHYSICAL

Length	120 mm (4 3/4 in)
Width	37 mm (1 1/2 in)
Height	76 mm (3 in)
Mounting	Recessed, junction box (not included)
Construction	Aluminum
Finish	White · black
Warranty	5 years



ORDERING

Build the product code

1 Series

LCAP-STRL3MT 3 W with sensor

2 Finish

WH white

BK black

EXAMPLE

LCAP-STRL3MT

-

BK

3 W with sensor

black

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-STRL3MT-BK	Color : Black
LCAP-STRL3MT-WH	Color : White

To be installed by a certified electrician, according to applicable codes.
Outdoors: caulk around the face plate with silicone to keep water out of the junction box.





INSTALLATION EXAMPLE



Installation example

24 V DC COB FLOODLIGHT, 1,900 OR 2,850 LUMENS, 3000K

Outdoor floodlight with a commercial-grade COB chip to cover large areas. It delivers 1,900 lumens at 20 W and 2,850 lumens at 30 W, in 3000K warm white. Black housing, 1.5 m lead without connector, cETLus certified. For wall grazing, signs, gardens and accent lighting.

FEATURES

- 20 W · 1,900 lumens
- 30 W · 2,850 lumens
- 1 COB chip · 3000K
- 24 V DC, non-dimmable
- Black housing · cETLus
- 3-year warranty

ELECTRICAL

Voltage	24 V DC
Power	20 W · 30 W
LED type	1 COB chip
Dimmable	No
Lead	1.5 m, UL2464 20 AWG, no connector

OPTICAL

Luminous flux 20 W	1,900 lm
Luminous flux 30 W	2,850 lm
Color temperature	3000K
Beam angle	120°

PHYSICAL

Dimensions 20 W	180 × 130 × 100 mm
Dimensions 30 W	230 × 180 × 130 mm
Color	Black
IP rating	IP67
Certification	cETLus
Warranty	3 years

APPLICATIONS

Wall grazing	✓
Signs	✓
Gardens	✓
Accent lighting	✓

ORDERING

Build the product code

1 Series LCFLD24V 24 V DC	2 Power 20W 30W	3 Color 30K 3000K
--	--	------------------------------------

EXAMPLE	LCFLD24V	-	20W	-	30K
	24 V		20 W		3000K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCFLD24V-20W-30K	PROJECTEUR LED 24V 20W (30K)
LCFLD24V-30W-30K	PROJECTEUR LED 24V 30W (30K)

ACCESSORIES

Code	Description	Sold
 LCWIRE-OUTD00R100	Landscape outdoor wire 18/2, 100 ft roll	100 ft roll
 LCWIRE-OUTD00R-185	18-5 outdoor wire, direct burial (sold per foot)	per foot
 LCCON-POWER-2PIN	SP21 IP68 waterproof power connector, 2 pins	each
 LCMARETTEEXT	Outdoor wire nut with silicone (pack of 2)	pack of 2
 LCJUNCBOX-EXT-IP68	IP68 outdoor junction box	each

Powered by a 24 V DC transformer.