

2026 CATALOG

LED Bulbs

13 products



Updated October 4, 2026


TABLE OF CONTENTS

LED Bulbs

	LED BULB A19 9 TO 15 W - E26 LCB-A19	p. 3
	LED BULB B10 5 W - E12 LCB-B10-5W	p. 5
	LED BULB G30 5 W - E26 LCB-G30-5W	p. 7
	LED BULB G4 2.5 W - 12 V LCB-G4-2.5W	p. 9
	LED BULB G40 4 W - E26 LCB-G40-4W	p. 11
	LED BULB G9 4 W - 120 V LCB-G9-4W	p. 13
	LED BULB GU10 6.5 W - 120 V LCB-GU10-6.5W	p. 15
	LED BULB GX23 6 W - 3 CCT LCB-PLV-6W-3CCT	p. 17
	LED BULB MR16 7 W - GU5.3 12 V LCB-MR16-7W	p. 19
	LED BULB PAR20 7 W - E26 · 5 CCT LCB-PAR20-7W-5CCT	p. 21
	LED BULB PAR30 12 W - E26 · 5 CCT LCB-PAR30-12W-5CCT	p. 23
	LED BULB PAR38 16 W - E26 · 5 CCT LCB-PAR38-16W-5CCT	p. 25
	LED BULB ST19 5 W - E26 LCB-ST19-5W	p. 27



DIMENSIONS · M.O.D. = MAX. OVERALL DIAMETER · M.O.L. = MAX. OVERALL LENGTH



THE CLASSIC SHAPE, IN 5 SELECTABLE CCT OR 4000K

A19 LED bulb with E26 base, 120 V, to replace incandescent bulbs in residential and commercial fixtures. The 9 W 5 CCT model (CRI 90) sets its color temperature with a switch, from 2700K to 5000K, and is dimmable. The 15 W model delivers 1,600 lm at 4000K. Rated for damp locations and enclosed fixtures.

FEATURES

- E26 base, 120 V
- 9 W: 800 lm, 5 CCT switch
- 15 W: 1,600 lm at 4000K
- 9 W 5 CCT: CRI 90, dimmable
- Enclosed fixture · damp location
- cETLus

LCB-A19-9W-5CCT

Power	9 W (60 W incandescent equiv.)
Flux	800 lm
Color temperature	2700 / 3000 / 3500 / 4000 / 5000K
CRI	90
Beam angle	220°
Dimming	Yes
Lifespan	25,000 h
Dimensions	Ø 60 × 118 mm (2.36 × 4.65 in)

LCB-A19-15W-40K

Power	15 W
Flux	1,600 lm
Color temperature	4000K
CRI	80
Beam angle	180°
Dimming	No
Lifespan	15,000 h
Dimensions	Ø 60 × 109 mm (2.38 × 4.3 in)

ORDERING

Build the product code

1 Format

LCB-A19 A19, E26 base

2 Power

9W 9 W

15W 15 W

17W actual 15 W (= 15W-40K)

3 Color

5CCT 2700K to 5000K

40K 4000K

EXAMPLE **LCB-A19** - **9W** - **5CCT**
 A19, E26 9 W 5 CCT

COMMON

Voltage · base	120 V · E26
Enclosed fixture · location	Yes · damp
Operating temperature	-40 °C to +40 °C
Certification	cETLus, RoHS

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-A19-15W-40K	15 W · 1,600 lm · 4000K
LCB-A19-17W-40K	15 W · 1,600 lm · 4000K (same bulb as LCB-A19-15W-40K)
LCB-A19-9W-5CCT	9 W · 800 lm · 5 CCT (2700K to 5000K)


5 CCT switch: select the color temperature before installation.

Warranty: 3 years for LCB-A19-9W-5CCT, 2 years for LCB-A19-15W-40K.

LCB-A19-17W-40K: same bulb as LCB-A19-15W-40K (15 W, 1,600 lm, 4000K, non-dimmable).



DIMENSIONS: MAX. OVERALL LENGTH (M.O.L.) 96 MM (3.78 IN)



LED FILAMENT BULB, CLEAR GLASS, LOW FLICKER

B10 LED filament bulb, clear glass, E12 base, 120 V. It replaces a 60 W incandescent bulb for chandeliers, wall sconces and decorative lamps. Dimmable, low flicker and rated for damp locations. Available in 2700K / 3000K / 4000K.

FEATURES

- E12 base, 120 V
- 500 lm · 60 W incandescent equiv.
- Available in 2700K / 3000K / 4000K
- Dimmable · low flicker
- Clear glass, visible filament
- Damp location

ELECTRICAL

Voltage	120 V
Power	5 W
Equivalent	60 W incandescent
Dimming	Yes
Base	E12

OPTICAL

Flux	500 lm
Color temperature	2700K / 3000K / 4000K
CRI	80
Beam angle	330°
Flicker	Down to 10%

PHYSICAL

Max. length	96 mm (3.78 in)
Glass	Clear
Location	Damp
Operating temperature	-20 °C to +40 °C
Lifespan	15,000 h (L70)
Certification	UL Certified
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-B10-5W B10, 5 W, E12

2 Color

27K 2700K

30K 3000K

40K 4000K

EXAMPLE **LCB-B10-5W - 27K**
 B10 5 W 2700K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-B10-5W-27K	Color temperature : 2700K
LCB-B10-5W-30K	Color temperature : 3000K
LCB-B10-5W-40K	Color temperature : 4000K

Low flicker: down to 10%, compared to 6.6% for a traditional incandescent (supplier sheet).



DIMENSIONS: MAX. OVERALL LENGTH (M.O.L.) 134 MM (5.28 IN)



LED FILAMENT BULB, CLEAR GLASS, LOW FLICKER

G30 LED filament bulb, clear glass, E26 base, 120 V. It replaces a 50 W incandescent bulb for pendants, wall sconces and vanity mirrors. Dimmable, low flicker and rated for damp locations. Available in 2700K / 3000K.

FEATURES

- E26 base, 120 V
- 500 lm · 50 W incandescent equiv.
- Available in 2700K / 3000K
- Dimmable · low flicker
- Clear glass, visible filament
- Damp location

ELECTRICAL

Voltage	120 V
Power	5 W
Equivalent	50 W incandescent
Dimming	Yes
Base	E26

OPTICAL

Flux	500 lm
Color temperature	2700K / 3000K
CRI	80
Beam angle	330°
Flicker	Down to 10%

PHYSICAL

Max. length	134 mm (5.28 in)
Glass	Clear
Location	Damp
Operating temperature	-20 °C to +40 °C
Lifespan	15,000 h (L70)
Certification	cULus
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-G30-5W G30, 5 W, E26

2 Color

27K 2700K

30K 3000K

EXAMPLE **LCB-G30-5W - 27K**
 G30 5 W 2700K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-G30-5W-27K	Color temperature : 2700K
LCB-G30-5W-30K	Color temperature : 3000K

Low flicker: down to 10%, compared to 6.6% for a traditional incandescent (supplier sheet).



DIMENSIONS: Ø 13 MM (0.52 IN) × 43 MM (1.7 IN)



COMPACT 12 V LED CAPSULE FOR G4 BASE

LED capsule with G4 bi-pin base, 12 V, replacing a 30 W halogen bulb in wall sconces, decorative fixtures and accent lighting. Compact 13 mm diameter. Dimmable. Available in 3000K and 4000K.

FEATURES

- G4 bi-pin base, 12 V
- 300 lm · 30 W halogen equiv.
- Available in 3000K and 4000K
- Dimmable
- Compact size: Ø 13 × 43 mm
- cETLus

ELECTRICAL

Voltage	12 V
Power	2.5 W
Equivalent	30 W halogen
Dimming	Yes
Base	G4

OPTICAL

Flux	300 lm
Color temperature	3000K / 4000K
CRI	80
Beam angle	360°

PHYSICAL

Dimensions	Ø 13 × 43 mm (0.52 × 1.7 in)
Enclosed fixture	No
Location	Dry
Operating temperature	-20 °C to +40 °C
Lifespan	15,000 h
Certification	cETLus
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-G4-2.5W G4, 2.5 W, 12 V

2 Color

30K 3000K

40K 4000K

EXAMPLE **LCB-G4-2.5W - 30K**
 G4 2.5 W 3000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-G4-2.5W-30K	Color temperature : 3000K
LCB-G4-2.5W-40K	Color temperature : 4000K

Low voltage: power at 12 V (transformer required); never connect directly to 120 V.
 Not suitable for totally enclosed fixtures or damp locations (supplier sheet).



DIMENSIONS: MAX. OVERALL LENGTH (M.O.L.) 172 MM (6.77 IN)



LED FILAMENT BULB, CLEAR GLASS, LOW FLICKER

G40 LED filament bulb, clear glass, E26 base, 120 V. It replaces a 40 W incandescent bulb for pendants, wall sconces and vanity mirrors. Dimmable, low flicker and rated for damp locations. Available in 3000K.

FEATURES

- E26 base, 120 V
- 350 lm · 40 W incandescent equiv.
- Available in 3000K
- Dimmable · low flicker
- Clear glass, visible filament
- Damp location

ELECTRICAL

Voltage	120 V
Power	4 W
Equivalent	40 W incandescent
Dimming	Yes
Base	E26

OPTICAL

Flux	350 lm
Color temperature	3000K
CRI	80
Beam angle	330°
Flicker	Down to 10%

PHYSICAL

Max. length	172 mm (6.77 in)
Glass	Clear
Location	Damp
Operating temperature	-20 °C to +40 °C
Lifespan	15,000 h (L70)
Certification	cULus
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-G40-4W G40, 4 W, E26

2 Color

30K 3000K

EXAMPLE **LCB-G40-4W - 30K**
 G40 4 W 3000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-G40-4W-30K	Color temperature : 3000K

Low flicker: down to 10%, compared to 6.6% for a traditional incandescent (supplier sheet).



DIMENSIONS: Ø 20 MM (0.77 IN) × 55 MM (2.16 IN) · M.O.D. = MAX. DIAMETER · M.O.L. = MAX. LENGTH



120 V LED CAPSULE FOR G9 BASE, DIMMABLE

LED capsule with G9 base, 120 V, replacing a 45 W halogen bulb in pendants, wall sconces and desk lamps. Frosted 330° diffuser, dimmable. Suitable for totally enclosed fixtures and damp locations. Available in 3000K and 4000K.

FEATURES

- G9 base, 120 V
- 450 lm · 45 W halogen equiv.
- Available in 3000K and 4000K
- Dimmable
- Enclosed fixture · damp location
- cETLus

ELECTRICAL

Voltage	120 V
Power	4 W
Equivalent	45 W halogen
Dimming	Yes
Base	G9

OPTICAL

Flux	450 lm
Color temperature	3000K / 4000K
CRI	80
Beam angle	330°

PHYSICAL

Dimensions	Ø 20 × 55 mm (0.77 × 2.16 in)
Enclosed fixture	Yes
Location	Damp
Operating temperature	-20 °C to +40 °C
Lifespan	25,000 h
Certification	cETLus
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-G9-4W G9, 4 W, 120 V

2 Color

30K 3000K

40K 4000K

EXAMPLE **LCB-G9-4W - 30K**
 G9 4 W 3000K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-G9-4W-30K	Color temperature : 3000K
LCB-G9-4W-40K	Color temperature : 4000K



DIMENSIONS: Ø 50 MM (1.97 IN) × 55 MM (2.17 IN)



120 V LED REFLECTOR, 35° BEAM, DIMMABLE

LED reflector bulb with GU10 base, 120 V, 35° beam, for recessed spots, track lighting and accent lighting. It delivers 480 lm for 6.5 W and fits any GU10 socket without modification. Dimmable, rated for damp locations.

FEATURES

- GU10 base, 120 V
- 480 lm · 35° beam
- Available in 3000K and 4000K
- Dimmable
- Damp location
- cULus

ELECTRICAL

Voltage	120 V
Power	6.5 W
Equivalent	40 W incandescent
Dimming	Yes
Base	GU10

OPTICAL

Flux	480 lm
Color temperature	3000K / 4000K
CRI	80
Beam angle	35°

PHYSICAL

Dimensions	Ø 50 × 55 mm (1.97 × 2.17 in)
Totally enclosed fixture	No
Location	Damp
Operating temperature	-20 °C to +45 °C
Lifespan	25,000 h
Certification	cULus
Warranty	3 years

ORDERING

Build the product code

1 Format

LCB-GU10-6.5W GU10, 6.5 W, 120 V

2 Color

30K 3000K

40K 4000K

EXAMPLE

LCB-GU10-6.5W - 30K

GU10 6.5 W

3000K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-GU10-6.5W-30K	Color temperature : 3000K
LCB-GU10-6.5W-40K	Color temperature : 4000K
LCB-GU10-6.5W-50K	Color temperature : 3000K

Not suitable for totally enclosed fixtures (supplier sheet).



DIMENSIONS: Ø 33 MM (1 1/4 IN) × 181 MM (7 1/8 IN)



REPLACES A 13 W GX23 2-PIN COMPACT FLUORESCENT

LED bulb with GX23 2-pin base to replace a 13 W PL compact fluorescent lamp in offices, hallways and commercial spaces. Ballast bypass installation, 120-277 V. Color temperature selectable in 3 positions (3000K, 4000K, 5000K). Operates vertically or horizontally.

FEATURES

- GX23 base, 2 pins
- Replaces a 13 W compact fluorescent
- 3 CCT: 3000K / 4000K / 5000K
- 615 to 675 lm depending on CCT
- Ballast bypass, 120-277 V
- Vertical or horizontal position

ELECTRICAL

Power	6 W
Equivalent	13 W compact fluorescent
Voltage	120-277 V
Installation	Ballast bypass
Dimming	No
Base	GX23 (2 pins)

OPTICAL

Color temperature	3000K / 4000K / 5000K
Flux (per CCT)	615 / 675 / 650 lm
CRI	83

PHYSICAL

Dimensions	Ø 33 × 181 mm (1 1/4 × 7 1/8 in)
Position	Vertical or horizontal
Location	Damp
Lifespan	50,000 h (L70)
Certification	cETLus



ORDERING

Build the product code

1 Code

LCB-PLV-6W-3CCT GX23, 6 W, 3 CCT

EXAMPLE

LCB-PLV-6W-3CCT

GX23 6 W 3 CCT


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-PLV-6W-3CCT	Color temperature : 3CCT selectable

Ballast bypass: remove or disconnect the ballast and wire the socket directly to line voltage.



DIMENSIONS: Ø 50 MM (1.97 IN) × 46 MM (1.8 IN) · M.O.D. = MAX. DIAMETER · M.O.L. = MAX. LENGTH



12 V LED REFLECTOR, 40° BEAM, DIMMABLE

MR16 LED reflector bulb with GU5.3 bi-pin base, 12 V, 40° beam, for recessed spots and accent lighting. It delivers 500 lm for 7 W and replaces a 50 W halogen bulb. Dimmable, rated for damp locations.

FEATURES

- GU5.3 bi-pin base, 12 V
- 500 lm · 50 W equiv.
- 40° beam
- Available in 3000K and 4000K
- Dimmable · damp location
- cULus

ELECTRICAL

Voltage	12 V
Power	7 W
Equivalent	50 W
Dimming	Yes
Base	GU5.3

OPTICAL

Flux	500 lm
Center beam intensity	1,251 cd
Color temperature	3000K / 4000K
CRI	80
Beam angle	40°

PHYSICAL

Dimensions	Ø 50 × 46 mm (1.97 × 1.8 in)
Totally enclosed fixture	No
Location	Damp
Operating temperature	-20 °C to +45 °C
Lifespan	25,000 h
Certification	cULus
Warranty	3 years

ORDERING

Build the product code

1 Format

LCB-MR16-7W MR16, GU5.3, 7 W, 12 V

2 Color

30K 3000K

40K 4000K

EXAMPLE

LCB-MR16-7W - 30K

MR16 7 W

3000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-MR16-7W-30K	Color temperature : 3000K
LCB-MR16-7W-40K	Color temperature : 4000K

Low voltage: power at 12 V (transformer required); never connect directly to 120 V.
 Not suitable for totally enclosed fixtures (supplier sheet).



DIMENSIONS: Ø 63 MM (2.47 IN) × 88 MM (3.46 IN)

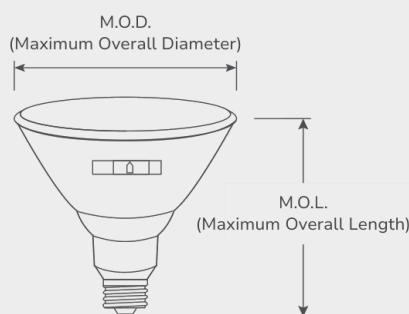

5 CCT LED REFLECTOR, CRI 90, FOR WET LOCATIONS

PAR20 LED reflector bulb with E26 base, 120 V, 40° beam, for recessed spots, track lighting and accent lighting. A switch sets the color temperature in 5 positions, from 2700K to 5000K. Glass lens, CRI 90, dimmable. Rated for wet (outdoor) locations. Available in white or black.

FEATURES

- E26 base, 120 V
- 520 to 567 lm · 40° beam
- 5 CCT switch: 2700K to 5000K
- CRI 90 · dimmable
- Wet location · glass lens
- White or black · cETLus

ELECTRICAL

Voltage	120 V
Power	7 W
Dimming	Yes
Base	E26

OPTICAL

Flux	520 to 567 lm depending on CCT
Color temperature	2700 / 3000 / 3500 / 4000 / 5000K
CRI	90
Beam angle	40°
Lens	Glass

PHYSICAL

Dimensions	Ø 63 × 88 mm (2.47 × 3.46 in)
Finish	White, black
Enclosed fixture	No
Location	Wet
Lifespan	25,000 h
Certification	cETLus
Warranty	3 years



LED BULBS
LED BULB PAR20 7 W - E26 · 5 CCT
LCB-PAR20-7W-5CCT

ORDERING

Build the product code

1 Format

LCB-PAR20-7W-5CCT PAR20, 7 W, 5 CCT

2 Finish

WH white

BK black

EXAMPLE **LCB-PAR20-7W-5CCT - WH**
PAR20 7 W 5 CCT white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-PAR20-7W-5CCT-BK	Finish : Black
LCB-PAR20-7W-5CCT-WH	Finish : White


5 CCT switch: select the color temperature before installation.

Do not install in an enclosed fixture (LED CO sheet).

Flux per switch position (2700 / 3000 / 3500 / 4000 / 5000K): 520 / 553 / 567 / 548 / 531 lm.



DIMENSIONS: Ø 95 MM (3.74 IN) × 123 MM (4.84 IN)

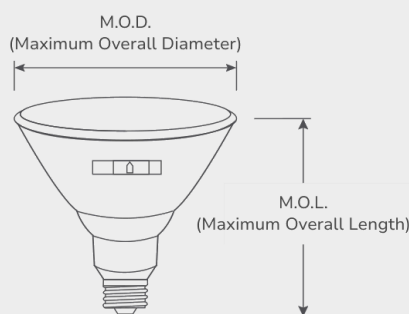

5 CCT LED REFLECTOR, CRI 90, FOR WET LOCATIONS

PAR30 LED reflector bulb with E26 base, 120 V, 40° beam, for recessed spots, ceiling fixtures and accent lighting. A switch sets the color temperature in 5 positions, from 2700K to 5000K. Glass lens, CRI 90, dimmable. Rated for wet (outdoor) locations. Available in white or black.

FEATURES

- E26 base, 120 V
- 852 to 970 lm · 40° beam
- 5 CCT switch: 2700K to 5000K
- CRI 90 · dimmable
- Wet location · glass lens
- White or black · cETLus

ELECTRICAL

Voltage	120 V
Power	12 W
Dimming	Yes
Base	E26

OPTICAL

Flux	852 to 970 lm depending on CCT
Color temperature	2700 / 3000 / 3500 / 4000 / 5000K
CRI	90
Beam angle	40°
Lens	Glass

PHYSICAL

Dimensions	Ø 95 × 123 mm (3.74 × 4.84 in)
Finish	White, black
Enclosed fixture	No
Location	Wet
Lifespan	25,000 h
Certification	cETLus
Warranty	3 years



LED BULBS
LED BULB PAR30 12 W - E26 · 5 CCT
LCB-PAR30-12W-5CCT

ORDERING

Build the product code

1 Format

LCB-PAR30-12W-5CCT PAR30, 12 W, 5 CCT

2 Finish

WH white

BK black

EXAMPLE

LCB-PAR30-12W-5CCT - WH

PAR30 12 W 5 CCT

white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-PAR30-12W-5CCT-BK	Finish : Black
LCB-PAR30-12W-5CCT-WH	Finish : White


5 CCT switch: select the color temperature before installation.

Do not install in an enclosed fixture (LED CO sheet).

Flux per switch position (2700 / 3000 / 3500 / 4000 / 5000K): 852 / 970 / 887 / 868 / 857 lm.



DIMENSIONS: Ø 122 MM (4.8 IN) × 135 MM (5.31 IN)

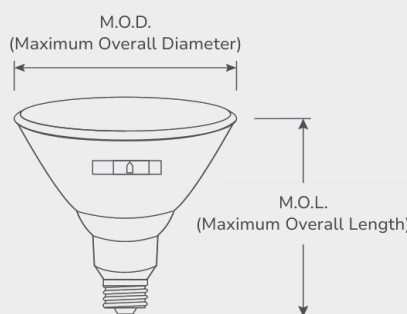

5 CCT LED REFLECTOR, CRI 90, FOR WET LOCATIONS

PAR38 LED reflector bulb with E26 base, 120 V, 40° beam, for spotlights, track lighting, sign lighting and outdoor use. A switch sets the color temperature in 5 positions, from 2700K to 5000K. Glass lens, CRI 90, dimmable. Rated for wet (outdoor) locations. Available in white or black.

FEATURES

- E26 base, 120 V
- 1457 to 1502 lm · 40° beam
- 5 CCT switch: 2700K to 5000K
- CRI 90 · dimmable
- Wet location · glass lens
- White or black · cETLus

ELECTRICAL

Voltage	120 V
Power	16 W
Dimming	Yes
Base	E26

OPTICAL

Flux	1457 to 1502 lm depending on CCT
Color temperature	2700 / 3000 / 3500 / 4000 / 5000K
CRI	90
Beam angle	40°
Lens	Glass

PHYSICAL

Dimensions	Ø 122 × 135 mm (4.8 × 5.31 in)
Finish	White, black
Enclosed fixture	No
Location	Wet
Lifespan	25,000 h
Certification	cETLus
Warranty	3 years



ORDERING

Build the product code

1

Format

LCB-PAR38-16W-5CCT PAR38, 16 W, 5 CCT

2

Finish

WH white

BK black

EXAMPLE

LCB-PAR38-16W-5CCT - WH

PAR38 16 W 5 CCT

white

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCB-PAR38-16W-5CCT-BK	Finish : Black
LCB-PAR38-16W-5CCT-WH	Finish : White

5 CCT switch: select the color temperature before installation.
Do not install in an enclosed fixture (LED CO sheet).
Flux per switch position (2700 / 3000 / 3500 / 4000 / 5000K): 1457 / 1488 / 1502 / 1500 / 1469 lm.





DIMENSIONS: MAX. OVERALL LENGTH (M.O.L.) 137 MM (5.39 IN)



LED FILAMENT BULB, CLEAR GLASS, LOW FLICKER

ST19 LED filament bulb, clear glass, E26 base, 120 V. It replaces a 60 W incandescent bulb for pendants and exposed-bulb fixtures. Dimmable, low flicker and rated for damp locations. Available in 2700K / 3000K / 4000K.

FEATURES

- E26 base, 120 V
- 600 lm · 60 W incandescent equiv.
- Available in 2700K / 3000K / 4000K
- Dimmable · low flicker
- Clear glass, visible filament
- Damp location

ELECTRICAL

Voltage	120 V
Power	5 W
Equivalent	60 W incandescent
Dimming	Yes
Base	E26

OPTICAL

Flux	600 lm
Color temperature	2700K / 3000K / 4000K
CRI	80
Beam angle	330°
Flicker	Down to 10%

PHYSICAL

Max. length	137 mm (5.39 in)
Glass	Clear
Location	Damp
Operating temperature	-20 °C to +40 °C
Lifespan	15,000 h (L70)
Certification	cULus
Warranty	2 years

ORDERING

Build the product code

1 Format

LCB-ST19-5W ST19, 5 W, E26

2 Color

27K 2700K

30K 3000K

40K 4000K

EXAMPLE **LCB-ST19-5W - 27K**
 ST19 5 W 2700K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCB-ST19-5W-27K	Color temperature : 2700K
LCB-ST19-5W-30K	Color temperature : 3000K
LCB-ST19-5W-40K	Color temperature : 4000K

Low flicker: down to 10%, compared to 6.6% for a traditional incandescent (supplier sheet).