

2026 CATALOG

LED Canopy Lights

2 products



Updated October 4, 2026


TABLE OF CONTENTS

LED Canopy Lights

	ROUND LED CEILING LIGHT 14 IN 24 W - 3000K LCCA-LUXWAY-24W-WH-B	p. 3
	SQUARE LED CANOPY LIGHT 28-40-60 W - 3 CCT LCCA-60W-MW-CCT-UV-T	p. 5



DIMENSIONS: Ø 355 × 30 MM (14 × 1 ¼ IN)

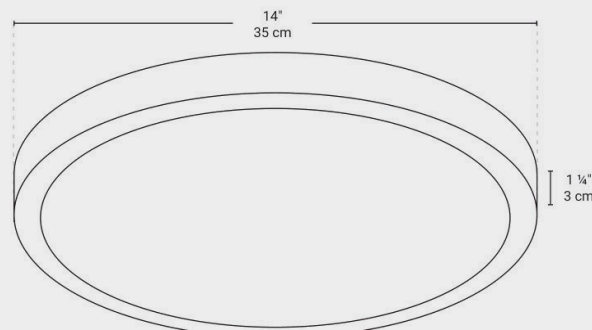

SLIM INTEGRATED LED CEILING LIGHT, 1,700 LUMENS

Slim 14 in round LED ceiling light with integrated LEDs, white finish and frosted acrylic diffuser. Its 1,700 lumens give even lighting for kitchens, living rooms and hallways, in residential or commercial settings. Dimmable; mounts to the ceiling on the electrical box.

FEATURES

- 24 W · 1,700 lumens
- Integrated LEDs, dimmable
- Ultra-slim: 30 mm (1 ¼ in)
- Frosted acrylic diffuser
- White finish
- cETLus

ELECTRICAL

Power	24 W
Source	Integrated LEDs
Dimming	Dimmable

OPTICAL

Flux	1,700 lm
Color temperature	3000K

PHYSICAL

Dimensions	Ø 355 × 30 mm (14 × 1 ¼ in)
Structure	White
Diffuser	Frosted acrylic
Mounting	Surface, ceiling
Certification	cETLus



ORDERING

Build the product code

1

Code

LCCA-LUXWAY-24W-WH-B 24 W, white

EXAMPLE

LCCA-LUXWAY-24W-WH-B

24 W ceiling light, white


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCCA-LUXWAY-24W-WH-B	Ceiling light 24 W, 14 in, white

Wiring per the installation guide: black wire to line (L), white wire to neutral (N); mounting screws supplied.



DIMENSIONS: 241 × 241 × 79 MM (9.5 × 9.5 × 3.1 IN)

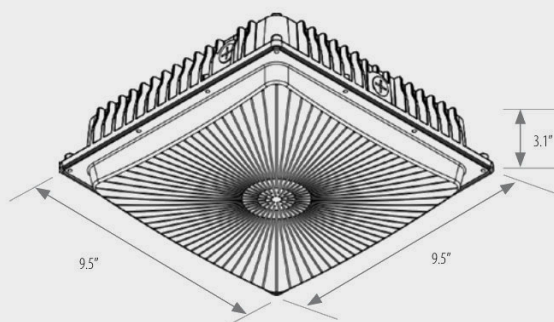

SLIM AND COMPACT, SELECTABLE POWER AND COLOR

Slim, compact square LED canopy light with a die-cast aluminum body and a UV-resistant prismatic polycarbonate diffuser. Power (28, 40 or 60 W) and color temperature (3000K, 4000K or 5000K) are selected on site. 120-347 V driver, 0-10V dimmable. For parking garages, multi-level car parks, canopies and commercial spaces.

FEATURES

- Selectable power: 28, 40, 60 W
- Selectable color: 3000K, 4000K, 5000K
- Up to 7,800 lm · ≥ 130 lm/W
- 120-347 V driver, 0-10V dimmable
- IP65 · wet location
- Surface on junction box or pendant

ELECTRICAL

Power	28 / 40 / 60 W
Voltage	120-347 V
Dimming	0-10V
Control	Daylight sensor compatible

OPTICAL

Flux	3,640 / 5,200 / 7,800 lm
Efficacy	≥ 130 lm/W
Color temperature	3000K / 4000K / 5000K
CRI	70
Distribution	150° × 150°

PHYSICAL

Dimensions	241 × 241 × 79 mm
Housing	Die-cast aluminum
Diffuser	UV-resistant prismatic polycarbonate
Finish	Dark bronze
Mounting	Junction box or pendant
Rating	IP65
Operating	-40 to +40 °C
Lifespan	50,000 h
Certification	UL

LOCATION RATING · IP65



Dry



Damp
(covered)



Wet



SQUARE LED CANOPY LIGHT 28-40-60 W - 3 CCT

LED CANOPY LIGHTS
LCCA-60W-MW-CCT-UV-T

ORDERING

Build the product code

1 Series LCCA-60W 28-40-60 W	2 Power MW selectable	3 Color CCT 3 CCT	4 Voltage UV 120-347 V
--	---------------------------------	-----------------------------	----------------------------------

EXAMPLE	LCCA-60W	-	MW	-	CCT	-	UV	-	T
	canopy		28-40-60 W		3 CCT		120-347 V		—

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCCA-60W-MW-CCT-UV-T	28-40-60 W, 3 CCT, 120-347 V

Power and color temperature are set with the selector on the fixture, before powering up.