


2026 CATALOG

LED Ceiling Lights

4 products

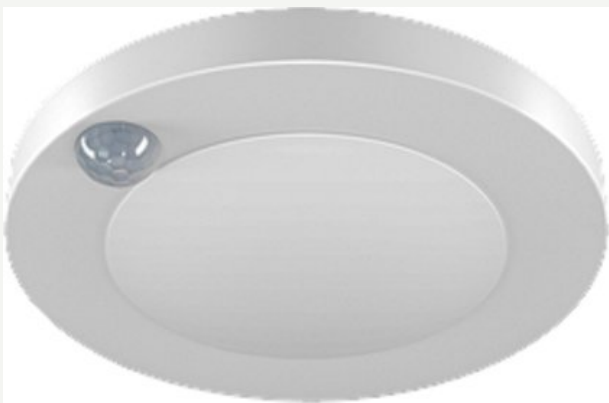

Updated October 4, 2026

TABLE OF CONTENTS

LED Ceiling Lights



12 IN ROUND LED CEILING LIGHT 24 W - 5 CCT

LCDL-PLAF12-24W-5CCT

p. 3



13 IN ROUND LED CEILING LIGHT 22 W - 5 CCT

LCDL-PLAF13-22W-5CCT

p. 5



6 IN ROUND LED CEILING LIGHT 15 W - 5 CCT

LCDL-PLAC-15W-120V-5CCT-WH

p. 7



9 IN ROUND LED CEILING LIGHT 20 W - 5 CCT

LCDL-PLAF9-20W-5CCT


p. 9



5CCT Selectable
(2700K/3500K/4000K/5000K/6000K)



DIMENSIONS: Ø 300 MM (11 3/4 IN) × 24 MM

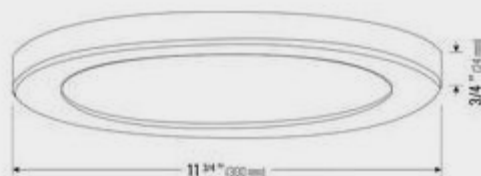

120 V ULTRA-SLIM CEILING LIGHT, FLICKER-FREE, 5 CCT

Ultra-slim 12 in round LED ceiling light: 24 mm thick for a 300 mm diameter. It spreads 3,000 lumens over 140°, flicker-free, for bedrooms, hallways, basements, offices and stores. 5 CCT switch from 2700K to 6000K, TRIAC dimmable, IP44 rated. Mounts on standard electrical boxes.

FEATURES

- 5 CCT switch: 2700K to 6000K
- 3,000 lm, 125 lm/W
- Flicker-free · TRIAC dimmable
- Only 24 mm thick
- IP44 · power factor 0.97
- White or black finish · cETL

ELECTRICAL

Voltage	120 V
Power	24 W
Dimming	TRIAC, flicker-free
Power factor	0.97
Connection	Wago connectors

OPTICAL

Flux	3,000 lm
Efficacy	125 lm/W
Color temperature	2700K / 3500K / 4000K / 5000K / 6000K
CRI	80
Beam angle	140°

PHYSICAL

Dimensions	Ø 300 × 24 mm
Weight	0.9 kg
Diffuser	Frosted polycarbonate
Finish	White or black
Mounting	On electrical box
Temperature	-10 °C to 40 °C
Lifespan	50,000 h
Certification	cETL
Warranty	3 years

LOCATION RATING · IP44

✓ Dry

✗ Damp
(covered)

✗ Wet



LED CEILING LIGHTS

12 IN ROUND LED CEILING LIGHT 24 W - 5 CCT

LCDL-PLAF12-24W-5CCT

ORDERING

Build the product code

1 Series

LCDL-PLAF12-24W-5CCT 12 in, 24 W, 5 CCT

2 Finish

WH-S white

BK-S black

EXAMPLE

LCDL-PLAF12-24W-5CCT

-

BK-S

12 in, 24 W, 5 CCT



black

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCDL-PLAF12-24W-5CCT-BK-S	Finish : Black
LCDL-PLAF12-24W-5CCT-WH-S	Finish : White

This model has no 3000K setting; choose 2700K for warm white, 3500K for neutral white.
Mounts on octagonal, square or single-gang electrical boxes.
Polycarbonate housing and lens; Energy Star listed; surge protection 1.5 kV with ground (0.9 kV without).



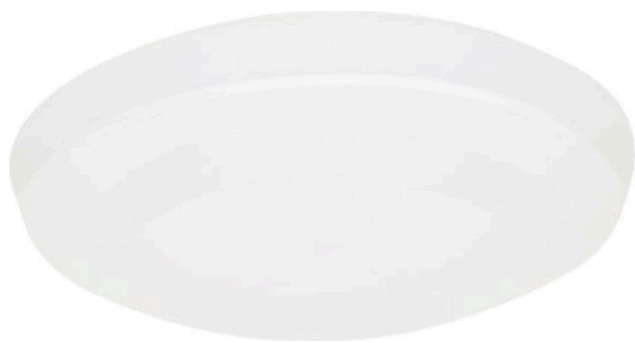

DIMENSIONS: D = 12 IN (M.O.D.) • H = 3.3 IN

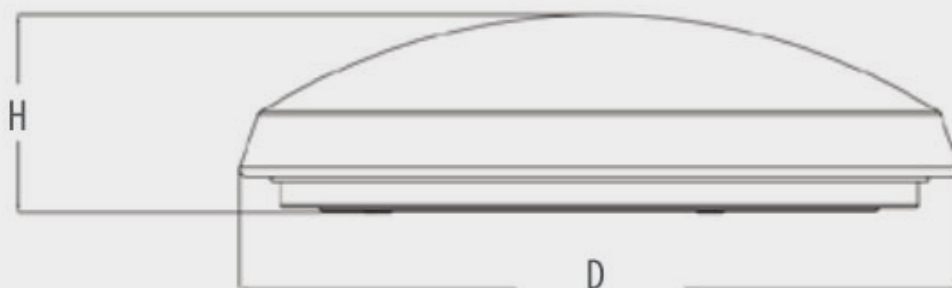

120 V CEILING LIGHT WITH BUILT-IN MULTI-MODE SENSOR, 5 CCT

13 in round LED ceiling light, 120 V, 22 W for 1,650 lumens, with a built-in multi-mode occupancy sensor: the light turns on when motion is detected, then dims or turns off according to the selected mode. The switch sets the color temperature from 2700K to 5000K. CRI 90, 120° beam, damp location rated.

FEATURES

- Built-in multi-mode sensor (S1, S2, S3)
- 5 CCT switch: 2700K to 5000K
- 1,650 lm for 22 W
- CRI 90
- Damp location · cETLus
- 5-year warranty

ELECTRICAL

Voltage	120 V
Power	22 W
Dimmable	Yes
Sensor	Built-in multi-mode

SENSOR · MODES

S1	100% 10 min → 50% 10 min → off
S2	100% 20 min → 50%
S3	100% 20 min → 30%

OPTICAL

Flux	1,650 lm
Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
Beam angle	120°

ORDERING

Build the product code

1 Code

LCDL-PLAF13-22W-5CCT 13 in, 22 W, 5 CCT, sensor

EXAMPLE

LCDL-PLAF13-22W-5CCT

13 in, 22 W, 5 CCT

PHYSICAL

Diameter (M.O.D.)	12 in
Height (M.O.H.)	3.3 in
Finish	White
Insulation	Non-IC
Location	Damp
Temperature	-20 °C to 40 °C
Lifespan	50,000 h (L70)
Certification	cETLus
Warranty	5 years


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCDL-PLAF13-22W-5CCT	13 in ceiling light, 22 W, 5 CCT, multi-mode sensor, white

Hold time: time at 100% after the last detection. Dim down: level kept afterwards with no occupancy. 2nd hold time (S1 only): time at that level before turning off.



DIMENSIONS: Ø 7.7 IN OVERALL × 1.1 IN

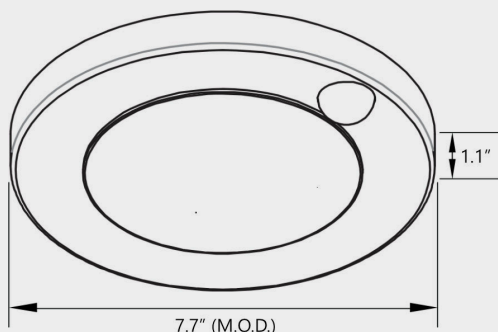

120 V CLOSET LIGHT WITH PIR MOTION SENSOR

6 in round LED closet light, 120 V, 15 W for 1,000 lumens. Its built-in PIR motion sensor turns the light on as soon as motion is detected and off 30 seconds later: ideal for closets, wardrobes and small rooms. 5 CCT switch from 2700K to 5000K, wide 120° beam.

FEATURES

- Built-in PIR sensor, 30 s delay
- 5 CCT switch: 2700K to 5000K
- 1,000 lm for 15 W
- Wide 120° beam
- Wet location · cETLus
- 5-year warranty

ELECTRICAL

Voltage	120 V
Power	15 W
Sensor	PIR, off after 30 s

OPTICAL

Flux	1,000 lm
Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
CRI	80
Beam angle	120°

PHYSICAL

Size	6 in
Overall diameter	7.7 in
Height	1.1 in
Finish	White
Location	Wet
Temperature	-10 °C to 40 °C
Lifespan	50,000 h
Certification	cETLus
Warranty	5 years



LED CEILING LIGHTS

6 IN ROUND LED CEILING LIGHT 15 W - 5 CCT

LCDL-PLAC-15W-120V-5CCT-WH

ORDERING

Build the product code

1

Code

LCDL-PLAC-15W-120V-5CCT-WH 6 in, 15 W, 120 V, 5 CCT, white

EXAMPLE

LCDL-PLAC-15W-120V-5CCT-WH

6 in closet, 15 W

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCDL-PLAC-15W-120V-5CCT-WH	6 in closet light, 15 W, 5 CCT, PIR sensor, white


The light turns on by itself when motion is detected: no switch to operate.



5CCT Selectable
(2700K/3000K/3500K/4000K/5000K)



DIMENSIONS: Ø 230 MM (9 IN) × 22 MM



120 V SLIM CEILING LIGHT, 5 SELECTABLE COLOR TEMPERATURES

Slim 9 in round LED ceiling light, 120 V, replacing bulb fixtures in hallways, bedrooms, closets, entrances and basements. Its frosted polycarbonate diffuser spreads 2,200 lumens evenly for 20 W. The built-in switch sets the color temperature from 2700K to 5000K; TRIAC dimmable. Available in white or black finish.

FEATURES

- 5 CCT switch: 2700K to 5000K
- 2,200 lm for 20 W
- TRIAC dimmable
- Only 22 mm thick
- Wago connectors
- White or black finish · cETL

ELECTRICAL

Voltage	120 V
Power	20 W
Dimming	TRIAC
Power factor	0.90
Connection	Wago connectors

OPTICAL

Flux	2,200 lm
Efficacy	110 lm/W
Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
CRI	80
Beam angle	120°

PHYSICAL

Dimensions	Ø 230 × 22 mm
Weight	0.6 kg
Housing	ABS
Diffuser	Frosted polycarbonate
Finish	White or black
Mounting	Surface, on ceiling
Temperature	-10 °C to 40 °C
Lifespan	50,000 h
Certification	cETL
Warranty	3 years



LED CEILING LIGHTS

9 IN ROUND LED CEILING LIGHT 20 W - 5 CCT

LCDL-PLAF9-20W-5CCT

ORDERING

Build the product code

1 Series

LCDL-PLAF9-20W-5CCT 9 in, 20 W, 5 CCT

2 Finish

WH-S white

BK-S black

EXAMPLE

LCDL-PLAF9-20W-5CCT - WH-S

9 in, 20 W, 5 CCT

white

LOCATION RATING · IP20

✓ Dry

✗ Damp (covered)

✗ Wet

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCDL-PLAF9-20W-5CCT-BK-S	Finish : Black
LCDL-PLAF9-20W-5CCT-WH-S	Finish : White

Dry locations only (IP20).
For a larger room, see the 12 in 24 W ceiling light (LCDL-PLAF12-24W-5CCT).

