2026 CATALOG

LED Mirrors

69 products













Updated October 4, 2026

TABLE OF CONTENTS



LED ANTI-FOG BACKLIT MIRROR 24×36 TO 60×36 IN - 110 V
LCMIR-KUO — p. 7



LED ANTI-FOG FRONT-LIT MIRROR 24×32 TO 60×32 IN - 110 V
LCMIR-KAI — p. 10



LED ANTI-FOG FRONT-LIT MIRROR 24×36 TO 60×36 IN - 110 V
LCMIR-KOS — p. 13



LED ANTI-FOG MIRRORED MEDICINE CABINET 24×32 IN - 110 V
LCMIR-CKAR — p. 16



LED BUBBLE BACKLIT MIRROR 50×32 IN 58 W - 110 V
LCMIR-BUB — p. 19



LED BUBBLE FRONT-LIT MIRROR 50×32 IN 58 W - 110 V
LCMIR-BUB-H — p. 22



LED CAPSULE BACKLIT MIRROR 24×36 IN 38 W - 110 V
LCMIR-ORIG-CAP — p. 25



LED CLOUD-SHAPED FRONT-LIT MIRROR 32×30 TO 39×38 IN
LCMIR-CLD — p. 28



LED CUT-CORNER FRONT-LIT MIRROR 30×36 IN 27 W - 110 V
LCMIR-LUS — p. 31



LED DECORATIVE ROUND FRONT-LIT MIRROR 40×40 IN - 110 V
LCMIR-RIV — p. 34



LED FRAMED ARCH FRONT-LIT MIRROR 24×36 TO 36×60 IN
LCMIR-CHIC-AR — p. 37



LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×28 IN - 120 V
LCMIR-ADIR — p. 41



LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V
LCMIR-CHIC-RE — p. 44

LED FRAMED FRONT-LIT MIRROR 60×32 TO 100×45 IN - 110 V
LCMIR-CHIC-RE — p. 49

LEDCO®

TABLE OF CONTENTS



LED FRAMED FROSTED BACKLIT MIRROR 24×32 TO 48×28 IN
LCMIR-OPE p. 53



LED FRAMED FROSTED BACKLIT MIRROR 48×35 TO 70×32 IN
LCMIR-OPE p. 56

LED FRAMED OVAL FRONT-LIT MIRROR 18×36 IN 24 W - 110 V
LCMIR-OLY p. 60



LED FRAMED OVAL FRONT-LIT MIRROR 24×36 TO 32×60 IN
LCMIR-CHIC-OV p. 63



LED FRAMED RING FRONT-LIT MIRROR 24×32 IN 30 W - 110 V
LCMIR-SOL p. 67



LED FRAMED ROUND FRONT-LIT MIRROR 24×24 TO 40×40 IN
LCMIR-CHIC-RO p. 70



LED FRAMED ROUND FRONT-LIT MIRROR 40×40 IN - 110 V
LCMIR-GHO-RO p. 74

LED FRAMED ROUNDED SQUARE MIRROR 32×32 TO 40×40 IN
LCMIR-EPU p. 77

LED FRAMED, ROUNDED CORNERS MIRROR 24×36 TO 85×40 IN
LCMIR-LUNA p. 80

LED FRONT-LIT AND BACKLIT MIRROR 24×24 TO 40×40 IN
LCMIR-DECA p. 84



LED FRONT-LIT AND BACKLIT MIRROR 48×35 TO 60×35 IN
LCMIR-CLASS p. 87



LED FROSTED BACKLIT MIRROR 20×28 TO 40×36 IN - 110 V
LCMIR-REC-FB p. 90



LED FROSTED BACKLIT MIRROR 24×36 TO 85×40 IN - 110 V
LCMIR-HAR-BL p. 94



LED FROSTED BACKLIT MIRROR 42×42 TO 60×36 IN - 110 V
LCMIR-REC-FB p. 98

LEDCO®

TABLE OF CONTENTS



LED FROSTED BACKLIT MIRROR 70×32 TO 100×45 IN - 110 V
LCMIR-REC-FB
p. 102



LED FROSTED BAND BACKLIT MIRROR 40×35 TO 100×45 IN
LCMIR-PAR-BL
p. 106



LED FROSTED OVAL BACKLIT MIRROR 20×28 TO 30×48 IN
LCMIR-OVAL-BL
p. 109



LED FROSTED ROUND BACKLIT MIRROR 24×24 TO 40×40 IN
LCMIR-ROND-BL
p. 112

LED GEOMETRIC FRONT-LIT MIRROR 40×40 IN 56 W - 110 V
LCMIR-ECLI
p. 115



LED GOLD-FRAMED FRONT-LIT MIRROR 28×40 IN 50 W - 110 V
LCMIR-GHO
p. 118



LED MIRROR 70×28 TO 85×40 IN
LCMIR-HOL-D
p. 121



LED MIRRORED MEDICINE CABINET 15×30 TO 72×30 IN - 110 V
LCMIR-GALA-C
p. 124



LED MIRRORED MEDICINE CABINET 24×32 IN 35 W - 110 V
LCMIR-VER-C
p. 127



LED MIRRORED MEDICINE CABINET 24×32 TO 72×30 IN - 110 V
LCMIR-HAR-C
p. 130



LED MIRRORED MEDICINE CABINET 48×36 TO 60×28 IN - 110 V
LCMIR-STE-C
p. 133



LED ORNATE FRONT-LIT MIRROR 48×36 TO 85×40 IN - 110 V
LCMIR-BAR
p. 136



LED OVAL BACKLIT MIRROR 24×36 IN 38 W - 110 V
LCMIR-ORIG-O
p. 139



LED OVAL FRONT-LIT MIRROR 24×36 TO 30×48 IN - 110 V
LCMIR-GALA-O
p. 142

LEDCO®

TABLE OF CONTENTS

LED OVAL MIRRORED MEDICINE CABINET 18×36 TO 18×48 IN
LCMIR-ONYX-C
p. 145


LED RECTANGULAR BACKLIT MIRROR 20×28 TO 48×35 IN
LCMIR-ORIG-BL
p. 148

LED RECTANGULAR BACKLIT MIRROR 55×36 TO 100×45 IN
LCMIR-ORIG-BL
p. 152


LED RECTANGULAR FRONT-LIT MIRROR 20×26 TO 40×35 IN
LCMIR-HAR
p. 156


LED RECTANGULAR FRONT-LIT MIRROR 24×32 TO 60×28 IN
LCMIR-AUR
p. 160


LED RECTANGULAR FRONT-LIT MIRROR 24×36 TO 55×36 IN
LCMIR-GALA
p. 163


LED RECTANGULAR FRONT-LIT MIRROR 40×40 TO 60×28 IN
LCMIR-HAR
p. 167


LED RECTANGULAR FRONT-LIT MIRROR 48×36 TO 70×32 IN
LCMIR-FLOR
p. 171


LED RECTANGULAR FRONT-LIT MIRROR 60×40 TO 100×45 IN
LCMIR-GALA
p. 174


LED RECTANGULAR FRONT-LIT MIRROR 60×45 TO 100×45 IN
LCMIR-HAR
p. 178


LED ROUND ANTI-FOG FRONT-LIT MIRROR 32×32 IN - 110 V
LCMIR-KIO
p. 182


LED ROUND BACKLIT MIRROR 32×32 TO 48×48 IN - 110 V
LCMIR-ORIG-R
p. 185

LED ROUND FRONT-LIT MIRROR 32×32 IN 23 W - 110 V
LCMIR-LOOP
p. 188


LED ROUND FRONT-LIT MIRROR 36×36 TO 44×44 IN - 110 V
LCMIR-HAR-R
p. 191

TABLE OF CONTENTS



LED ROUND FRONT-LIT MIRROR 40×40 IN 50 W - 110 V
LCMIR-GALA-R
p. 194



LED ROUND VANITY MIRROR WITH BULBS 28×28 IN - 120 V
LCMIR-DIA
p. 197



LED SQUARE RING-LIT FRONT-LIT MIRROR 28×28 TO 40×40 IN
LCMIR-HALO
p. 200



LED STRIP-LIT FRONT-LIT MIRROR 24×32 TO 60×35 IN
LCMIR-VER
p. 203



LED STRIP-LIT FRONT-LIT MIRROR 24×36 TO 60×36 IN
LCMIR-GAL2
p. 206

LED THREE-PANEL FRONT-LIT MIRROR 48×30 TO 60×30 IN
LCMIR-TRIF
p. 209



LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V
LCMIR-GRA
p. 212



LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V
LCMIR-MARI
p. 215



LED VANITY MIRROR WITH BULBS 24×36 TO 60×36 IN - 120 V
LCMIR-HOL
p. 218



LED VANITY MIRROR WITH BULBS 32×24 TO 85×40 IN - 110 V
LCMIR-PRINC
p. 221

LED WITH SHELF AND CHARGER MIRROR 48×28 TO 70×32 IN
LCMIR-LINEA
p. 224


LED WITH SHELF FRONT-LIT MIRROR 20×36 IN 22 W - 110 V
LCMIR-ARV
p. 227


RECTANGULAR FRONT-LIT LED MIRROR 20×26 TO 100×45 IN
LCMIR-HAR
p. 230

Images, drawings and specifications are provided for reference only and may change without notice. Visit ledco.ca for the latest version of each spec sheet.


LED ANTI-FOG BACKLIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KUO

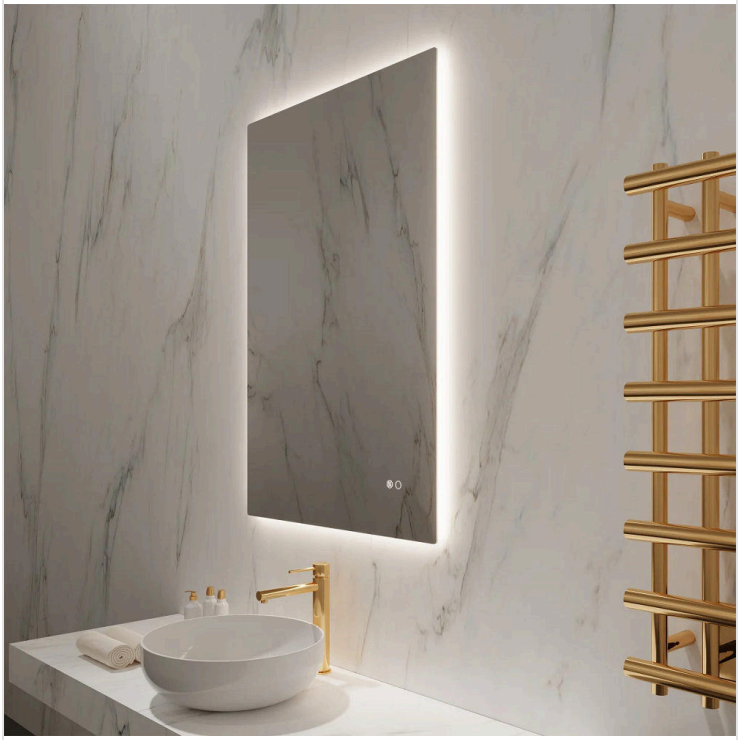

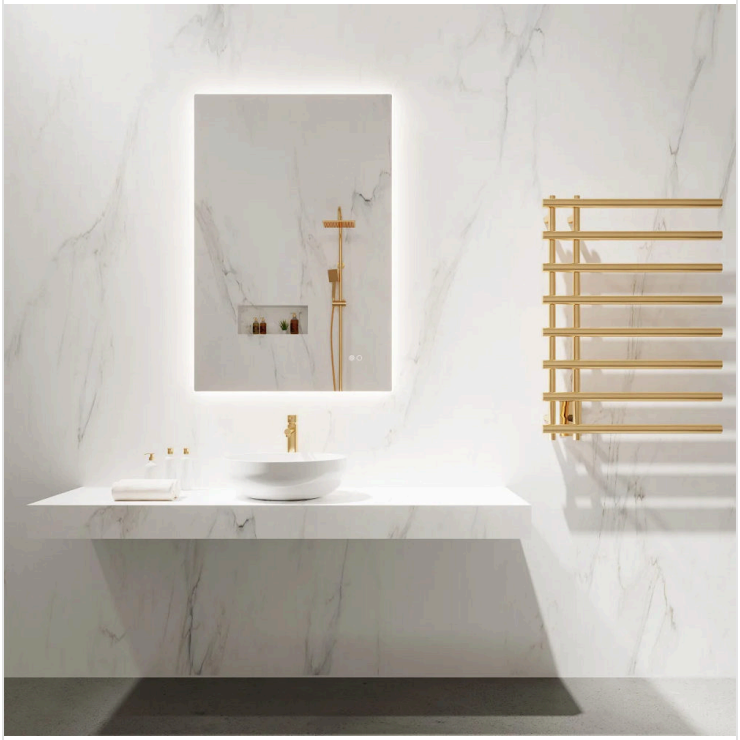



DIMENSIONS · 24 × 36 IN SIZE SHOWN

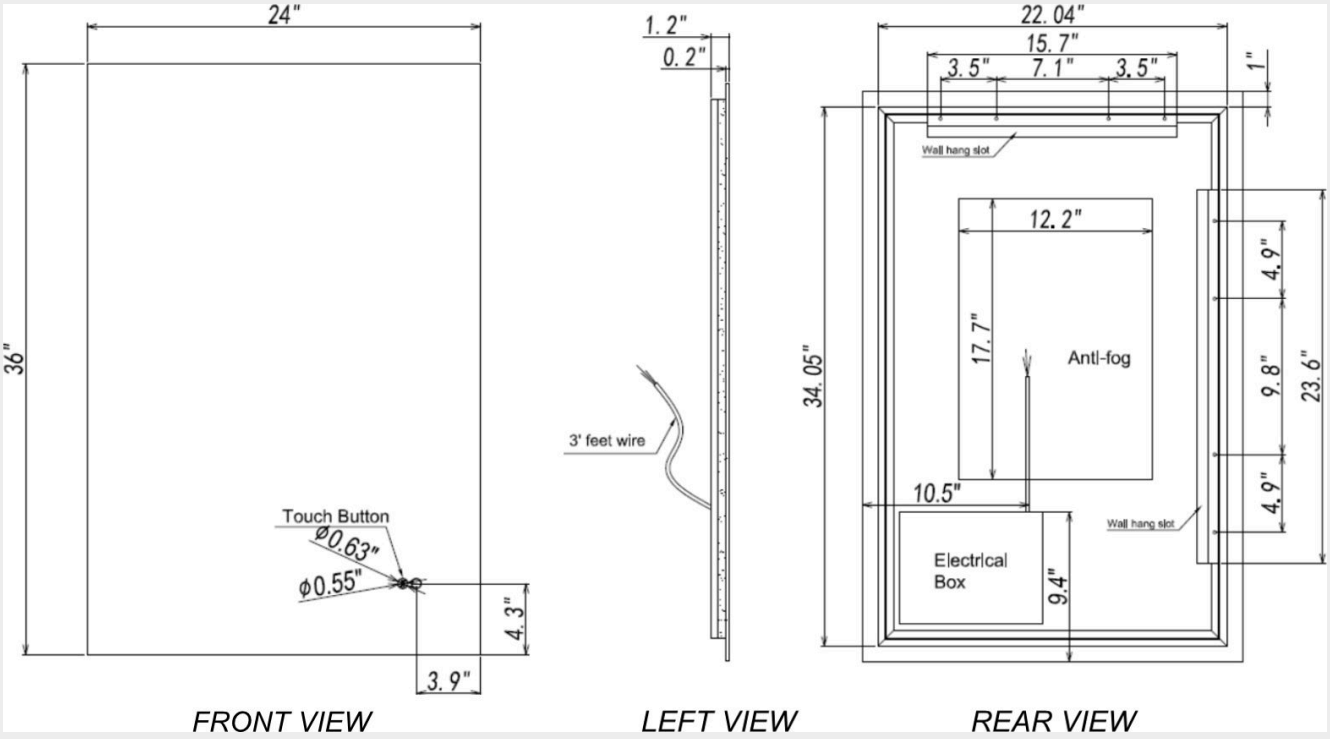


LED ANTI-FOG BACKLIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KUO

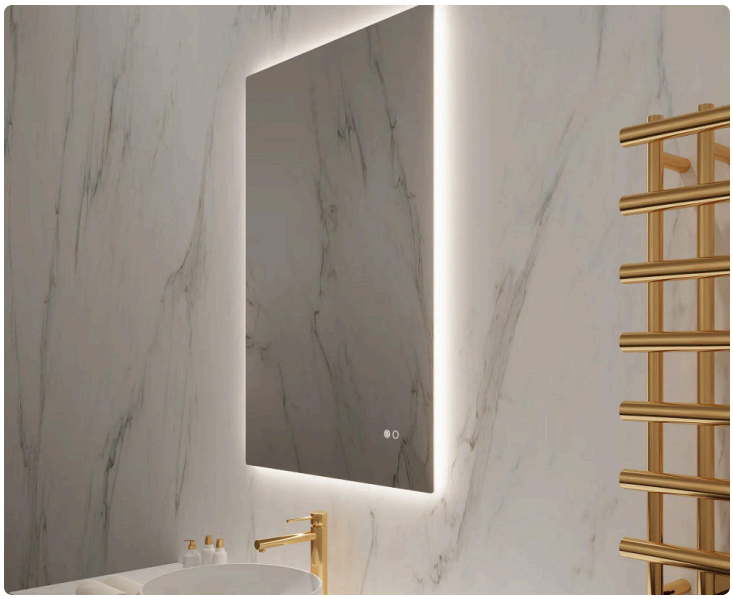

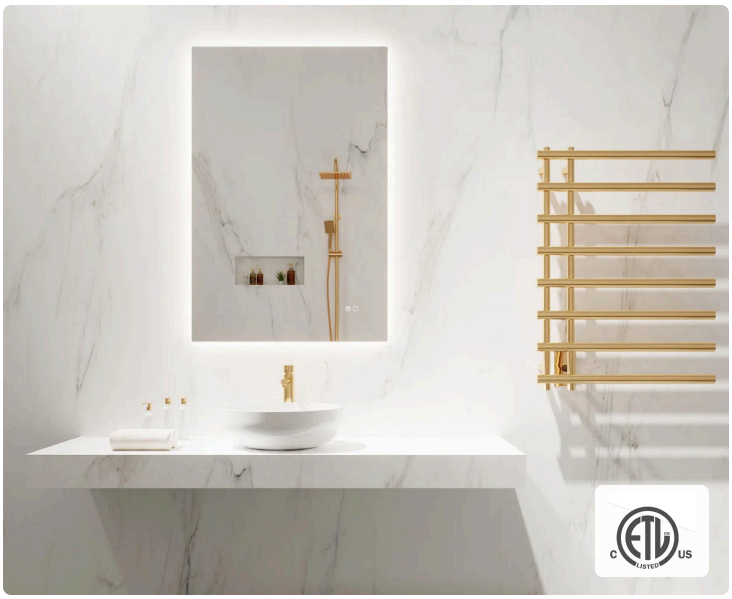

DIMENSIONS · 24 × 36 IN SIZE SHOWN

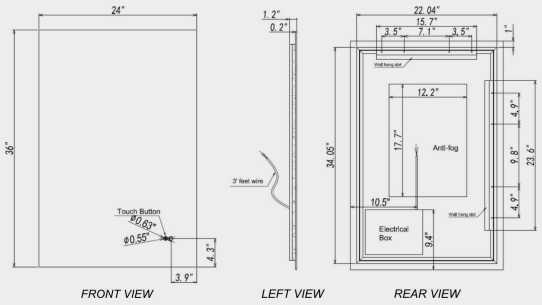

BACKLIT LED MIRROR, 4 SIZES

Backlit LED mirror: the light spreads on the wall behind the mirror with anti-fog for the bathroom, available in 4 sizes, from 24 × 36 in to 60 × 36 in. It delivers 2,640 to 4,416 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,640 to 4,416 lm · CRI 90+
- Anti-fog on the left touch button
- 3 CCT by touch sensor
- IP44 · ETL certified
- 1 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	62 to 104 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,640 to 4,416 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 40 × 36 · 48 × 36 · 60 × 36 in
Depth	1 1/2 in
Weight	15 to 37 lb
Mounting	Horizontal or vertical
Warranty	1 year

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ANTI-FOG BACKLIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KUO

ORDERING

Build the product code

1 Series

LCMIR-KUO

2 Size

2436 24 × 36 in
4036 40 × 36 in
4836 48 × 36 in
6036 60 × 36 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-KUO** (series) - **2436** (24 × 36 in) - **3CCT-TS** (3000K / 4000K / 6000K by touch sensor)

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	62 W	2,640 lm	15 lb
40 × 36 in	71 W	3,456 lm	25 lb
48 × 36 in	75 W	3,840 lm	30 lb
60 × 36 in	104 W	4,416 lm	37 lb


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-KUO-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-KUO-4036-3CCT-TS	Dimension : 40X36 · Color temperature : 3CCT selectable
LCMIR-KUO-4836-3CCT-TS	Dimension : 48X36 · Color temperature : 3CCT selectable
LCMIR-KUO-6036-3CCT-TS	Dimension : 60X36 · Color temperature : 3CCT selectable

Left touch button: anti-fog (automatic shut-off after one hour). Right button: on / off, double tap to change the color, press and hold to dim.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED ANTI-FOG FRONT-LIT MIRROR 24×32 TO 60×32 IN - 110 V

LCMIR-KAI

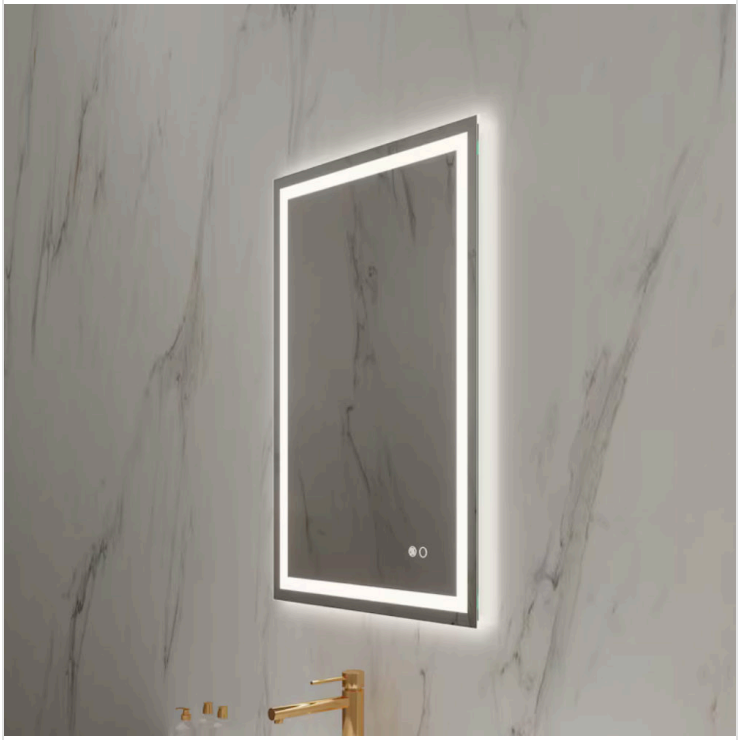




DIMENSIONS · 24 × 32 IN SIZE SHOWN

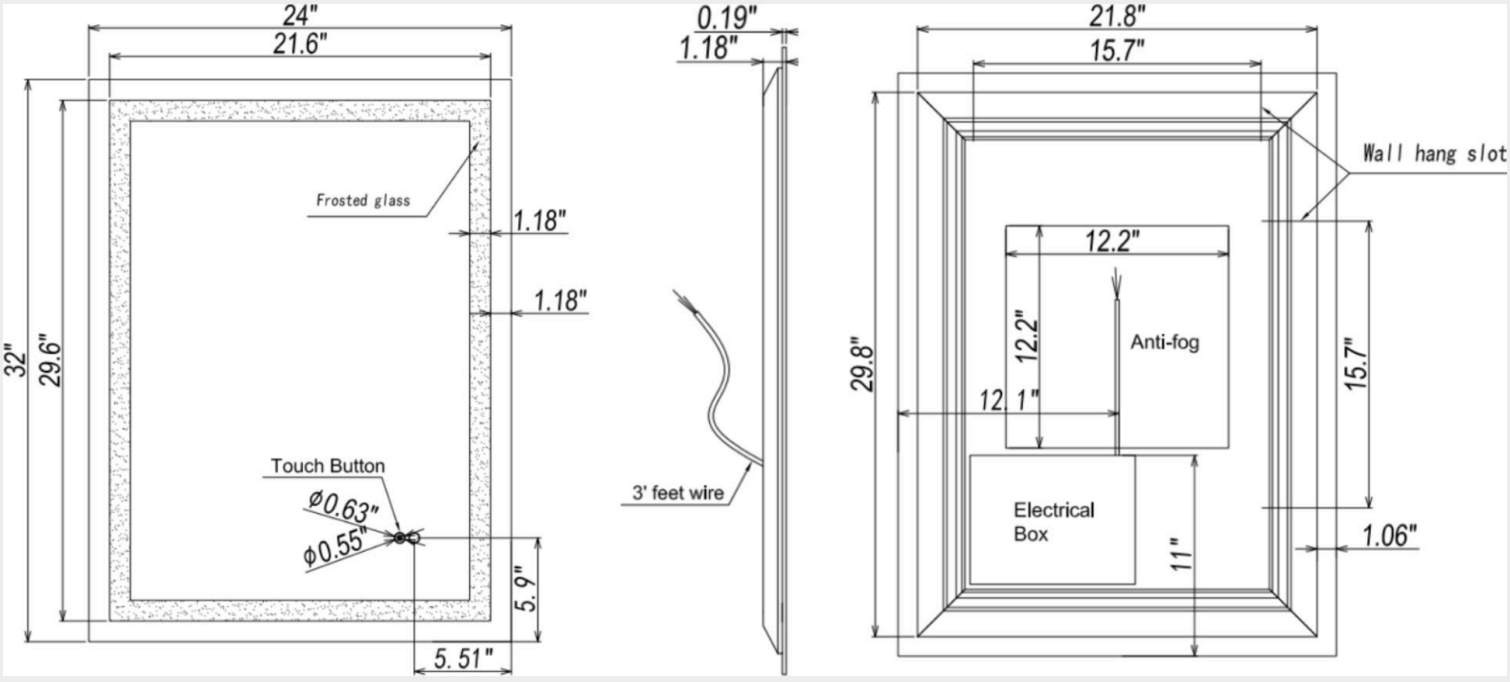


LED ANTI-FOG FRONT-LIT MIRROR 24×32 TO 60×32 IN - 110 V

LCMIR-KAI

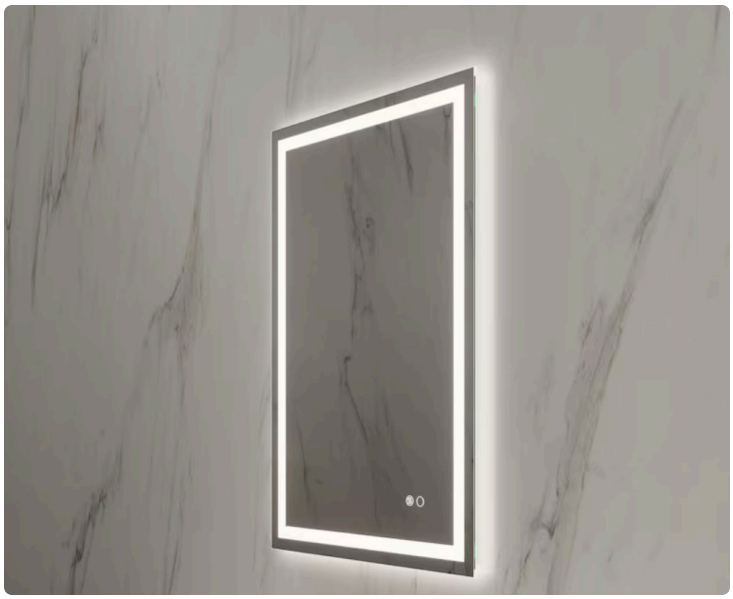



DIMENSIONS · 24 × 32 IN SIZE SHOWN

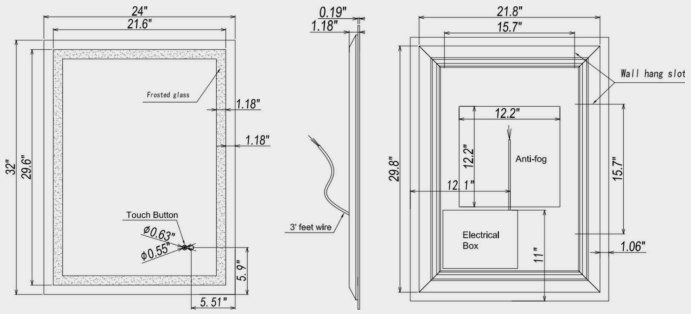

FRONT-LIT LED MIRROR WITH ANTI-FOG, 4 SIZES

Front-lit LED mirror with anti-fog for the bathroom, available in 4 sizes, from 24 × 32 in to 60 × 32 in. It delivers 2,256 to 3,984 lumens depending on size, with a CRI of 90+. Light: 3000K / 4500K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,256 to 3,984 lm · CRI 90+
- Anti-fog on the left touch button
- 3 CCT by touch sensor
- IP44 · ETL certified
- 1 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	58 to 99 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,256 to 3,984 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 40 × 32 · 48 × 32 · 60 × 32 in
Depth	1 3/16 in
Weight	16 to 41 lb
Mounting	Horizontal or vertical
Warranty	1 year

LOCATION RATING · IP44

✓ Dry	Damp (covered)	Wet

LED ANTI-FOG FRONT-LIT MIRROR 24×32 TO 60×32 IN - 110 V

LCMIR-KAI

ORDERING

Build the product code

1 Series

LCMIR-KAI

2 Size

2432 24 × 32 in
4032 40 × 32 in
4832 48 × 32 in
6032 60 × 32 in

3 Color

3CCT-TS 3000K / 4500K / 6000K by touch sensor

EXAMPLE **LCMIR-KAI** – **2432** – **3CCT-TS**
series · 24 × 32 in · 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	58 W	2,256 lm	16 lb
40 × 32 in	66 W	3,024 lm	28 lb
48 × 32 in	70 W	3,408 lm	33 lb
60 × 32 in	99 W	3,984 lm	41 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-KAI-2432-3CCT-TS	Dimension : 24X32 · Color temperature : 3CCT selectable
LCMIR-KAI-4032-3CCT-TS	Dimension : 40X32 · Color temperature : 3CCT selectable
LCMIR-KAI-4832-3CCT-TS	Dimension : 48X32 · Color temperature : 3CCT selectable
LCMIR-KAI-6032-3CCT-TS	Dimension : 60X32 · Color temperature : 3CCT selectable

Left touch button: anti-fog (automatic shut-off after one hour). Right button: on / off, double tap to change the color, press and hold to dim.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED ANTI-FOG FRONT-LIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KOS






DIMENSIONS · 24 × 36 IN SIZE SHOWN

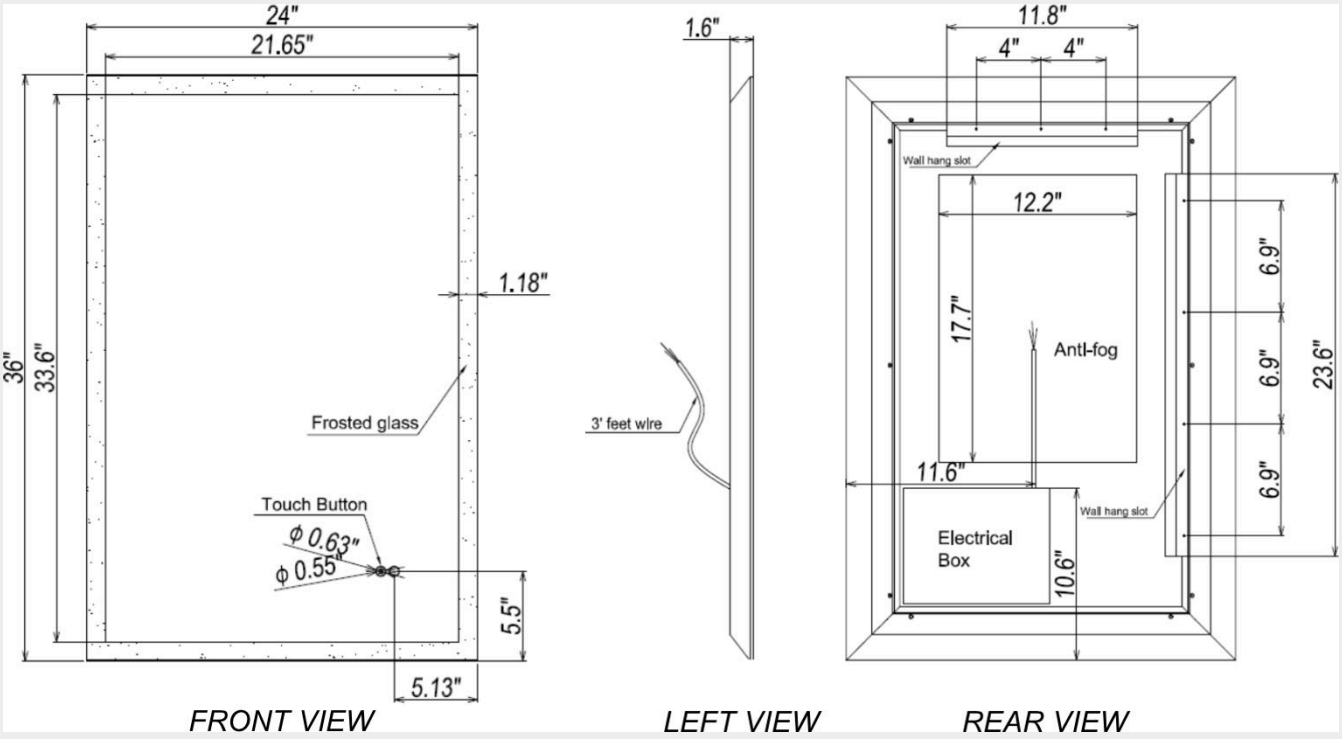


LED ANTI-FOG FRONT-LIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KOS

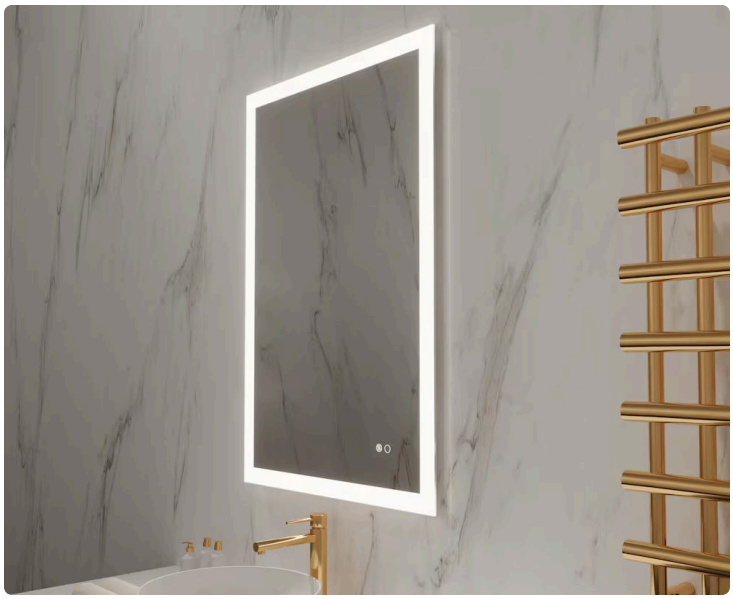



DIMENSIONS · 24 × 36 IN SIZE SHOWN

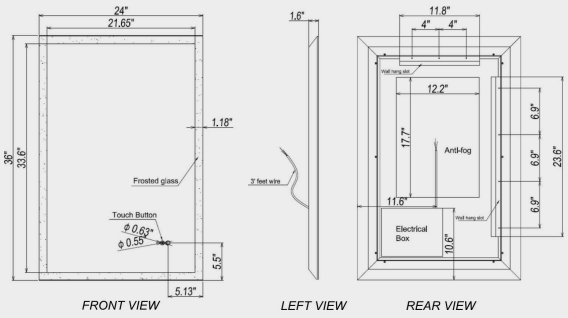

FRONT-LIT LED MIRROR WITH ANTI-FOG, 4 SIZES

Front-lit LED mirror with anti-fog for the bathroom, available in 4 sizes, from 24 × 36 in to 60 × 36 in. It delivers 2,448 to 4,224 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,448 to 4,224 lm · CRI 90+
- Anti-fog on the left touch button
- 3 CCT by touch sensor
- IP44 · ETL certified
- 1 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	60 to 102 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,448 to 4,224 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 40 × 36 · 48 × 36 · 60 × 36 in
Depth	1 5/8 in
Weight	19 to 47 lb
Mounting	Horizontal or vertical
Warranty	1 year

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ANTI-FOG FRONT-LIT MIRROR 24×36 TO 60×36 IN - 110 V

LCMIR-KOS

ORDERING

Build the product code

1 Series

LCMIR-KOS

2 Size

2436 24 × 36 in
4036 40 × 36 in
4836 48 × 36 in
6036 60 × 36 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-KOS** – **2436** – **3CCT-TS**

series | 24 × 36 in | 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	60 W	2,448 lm	19 lb
40 × 36 in	69 W	3,264 lm	31 lb
48 × 36 in	73 W	3,648 lm	37 lb
60 × 36 in	102 W	4,224 lm	47 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-KOS-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-KOS-4036-3CCT-TS	Dimension : 40X36 · Color temperature : 3CCT selectable
LCMIR-KOS-4836-3CCT-TS	Dimension : 48X36 · Color temperature : 3CCT selectable
LCMIR-KOS-6036-3CCT-TS	Dimension : 60X36 · Color temperature : 3CCT selectable

Left touch button: anti-fog (automatic shut-off after one hour). Right button: on / off, double tap to change the color, press and hold to dim.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED ANTI-FOG MIRRORED MEDICINE CABINET 24×32 IN - 110 V

LCMIR-CKAR






DIMENSIONS: 24 × 32 IN × 5.4 IN

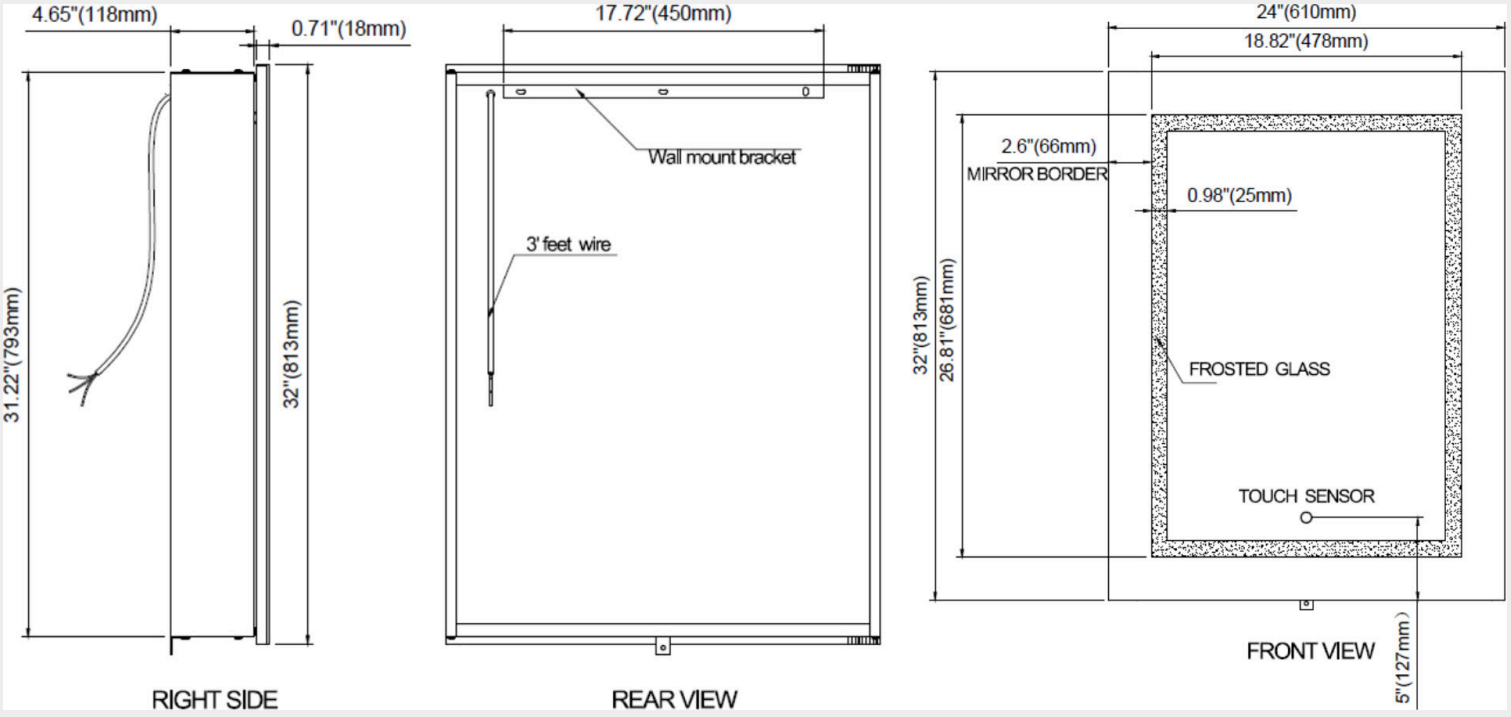


LED ANTI-FOG MIRRORED MEDICINE CABINET 24×32 IN - 110 V

LCMIR-CKAR

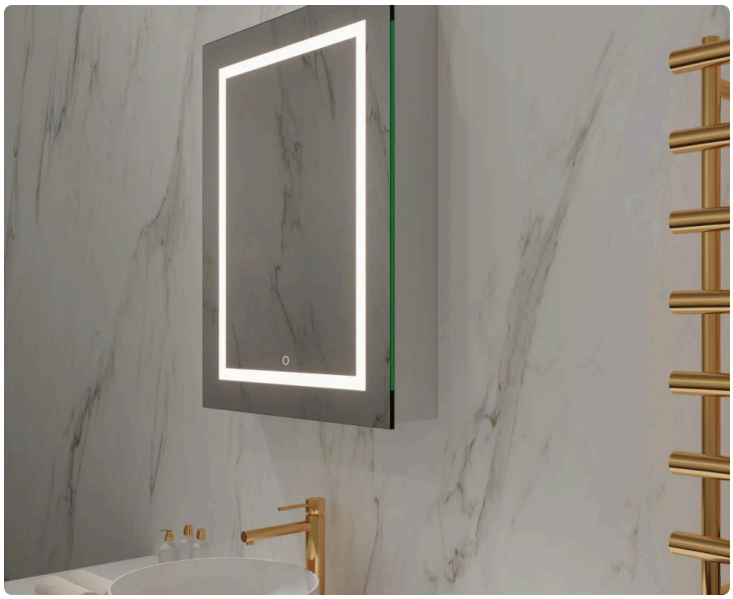



DIMENSIONS: 24 × 32 IN × 5.4 IN

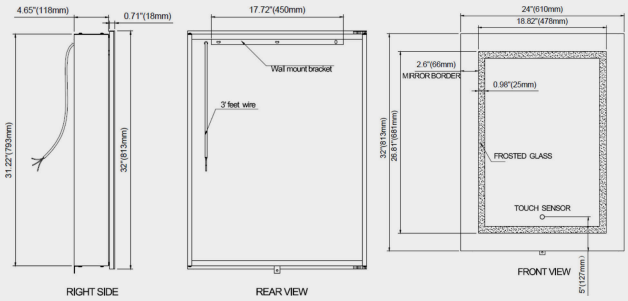

LIGHTED MIRRORED MEDICINE CABINET WITH ANTI-FOG, 1 SIZE

Lighted mirrored medicine cabinet with anti-fog for the bathroom, available in 24 × 32 in. It delivers 2,650 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,650 lm · CRI 90+
- Anti-fog on the left touch button
- 3 CCT by touch sensor
- IP44 · cULus certified
- 1 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	22 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,650 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	24 × 32 in
Depth	5.4 in
Weight	42 lb
Mounting	Vertical only
Warranty	1 year

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ANTI-FOG MIRRORED MEDICINE CABINET 24×32 IN - 110 V

LCMIR-CKAR

ORDERING

Build the product code

1 Series
LCMIR-CKAR

2 Size
2432 24 × 32 in

3 Color
3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-CKAR** – **2432** – **3CCT-TS**
series | 24 × 32 in | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CKAR-2432-3CCT-TS	Dimension : 24X32 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 24 × 32 in: 22 W, 2650 lm, 42 lb.
Per the old spec sheet: 2,650 lm and 22 W in 3000K / 6000K, 5,200 lm and 44 W in 4000K. Anti-fog: automatic shut-off after one hour; the mirror remembers the color and brightness.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED BUBBLE BACKLIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB





DIMENSIONS: 50 × 32 IN

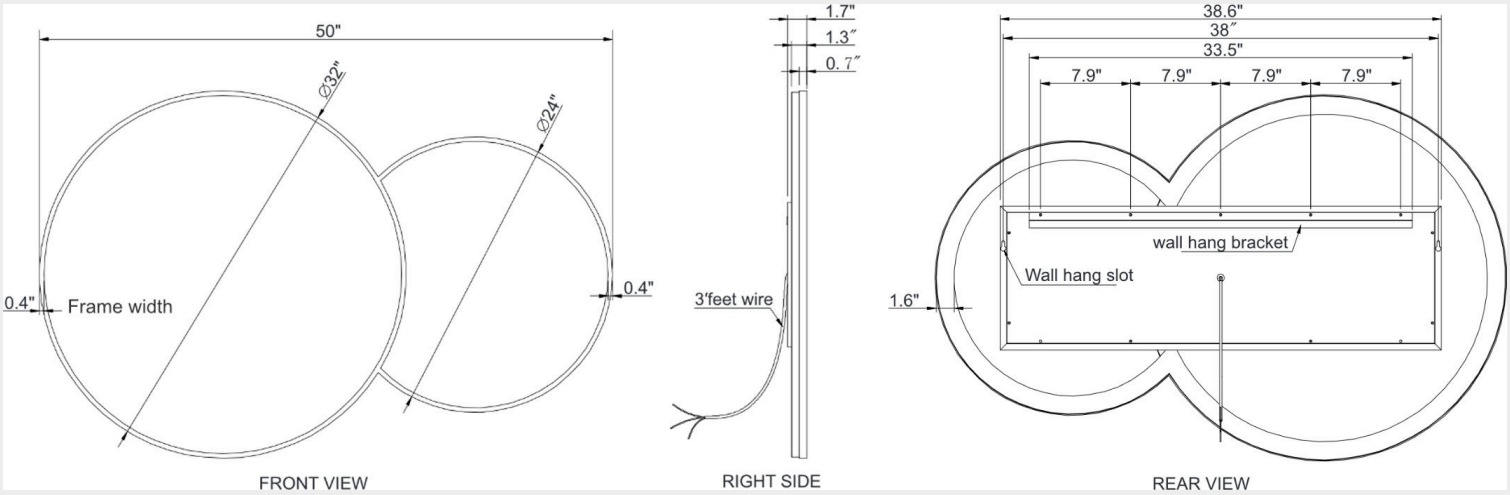

LED MIRRORS


LED BUBBLE BACKLIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB





DIMENSIONS: 50 × 32 IN

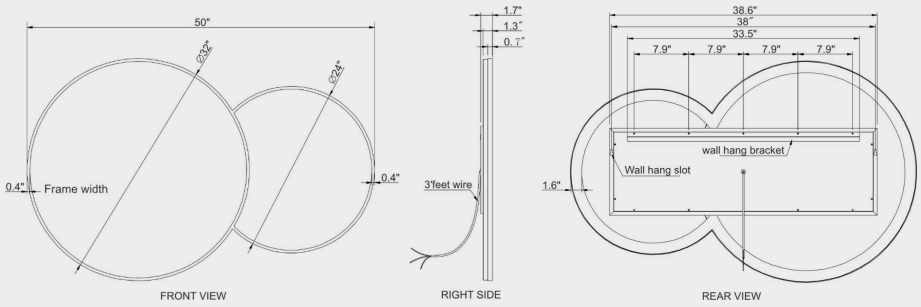

BACKLIT LED MIRROR, 1 SIZE, 2 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 50 × 32 in. It delivers 6,430 lumens depending on size, with a CRI of 90+. Frame: no frame, black, gold. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 6,430 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: no frame · black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	58 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	6,430 lm
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	50 × 32 in
Weight	54 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED BUBBLE BACKLIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB

ORDERING

Build the product code

1 Series	2 Size	3 Frame	4 Color
LCMIR-BUB	**5032** 50 × 32 in	**BK** black **GD** gold	**30K** 3000K warm white **60K** 6000K cool white

EXAMPLE **LCMIR-BUB** – **5032** – **60K**

series · 50 × 32 in · 6000K cool white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-BUB-5032-30K	Dimension : 50X32 · Color du cadre : Sans cadre · Color temperature : 3000K
LCMIR-BUB-5032-60K	Dimension : 50X32 · Color du cadre : Sans cadre · Color temperature : 6000K
LCMIR-BUB-5032-BK-30K	Dimension : 50X32 · Color du cadre : Black · Color temperature : 3000K
LCMIR-BUB-5032-BK-60K	Dimension : 50X32 · Color du cadre : Black · Color temperature : 6000K
LCMIR-BUB-5032-GD-30K	Dimension : 50X32 · Color du cadre : Or · Color temperature : 3000K
LCMIR-BUB-5032-GD-60K	Dimension : 50X32 · Color du cadre : Or · Color temperature : 6000K

Per size (3000K / 6000K lumens when they differ) — 50 × 32 in: 58 W, 6 430 lm, 54 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED BUBBLE FRONT-LIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB-H





DIMENSIONS: 50 × 32 IN × 1.7 IN

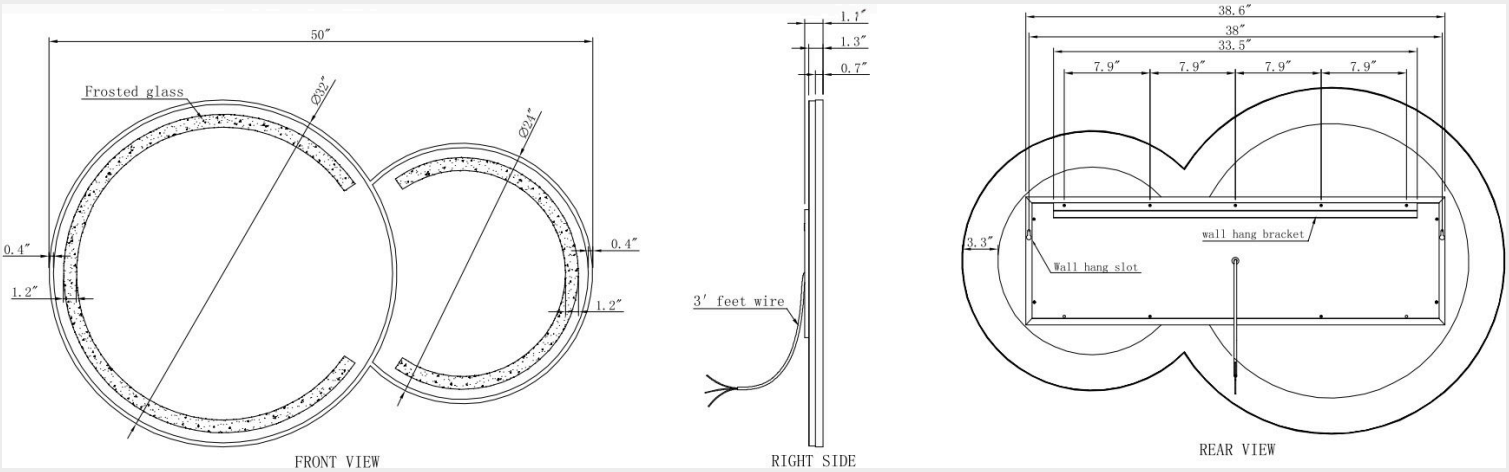


LED BUBBLE FRONT-LIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB-H





DIMENSIONS: 50 × 32 IN × 1.7 IN

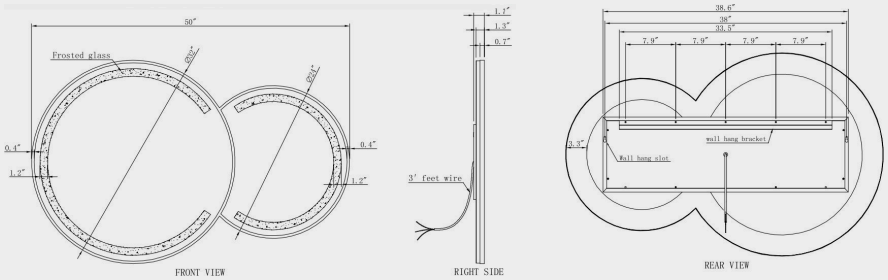

FRONT-LIT LED MIRROR, 1 SIZE, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 50 × 32 in. It delivers 5,940 lumens depending on size, with a CRI of 90+. Frame: no frame, black, gold. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 5,940 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: no frame · black · gold
- Front-lit and backlit
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	58 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	5,940 lm
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	50 × 32 in
Depth	1.7 in
Weight	54 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED BUBBLE FRONT-LIT MIRROR 50×32 IN 58 W - 110 V

LCMIR-BUB-H

ORDERING

Build the product code

1 Series
`LCMIR-BUB-H`

2 Size
`5032` 50 × 32 in

3 Frame
`BK` black
`GD` gold

4 Color
`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE `LCMIR-BUB-H` (series) - `5032` (50 × 32 in) - `60K` (6000K cool white)

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-BUB-H-5032-30K`	Dimension : 50X32 · Color du cadre : Sans cadre · Color temperature : 3000K
`LCMIR-BUB-H-5032-60K`	Dimension : 50X32 · Color du cadre : Sans cadre · Color temperature : 6000K
`LCMIR-BUB-H-5032-BK-30K`	Dimension : 50X32 · Color du cadre : Black · Color temperature : 3000K
`LCMIR-BUB-H-5032-BK-60K`	Dimension : 50X32 · Color du cadre : Black · Color temperature : 6000K
`LCMIR-BUB-H-5032-GD-30K`	Dimension : 50X32 · Color du cadre : Or · Color temperature : 3000K
`LCMIR-BUB-H-5032-GD-60K`	Dimension : 50X32 · Color du cadre : Or · Color temperature : 6000K

Per size (3000K / 6000K lumens when they differ) — 50 × 32 in: 58 W, 5 940 lm, 54 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED CAPSULE BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-CAP





DIMENSIONS: 24 × 36 IN × 1 9/16 IN

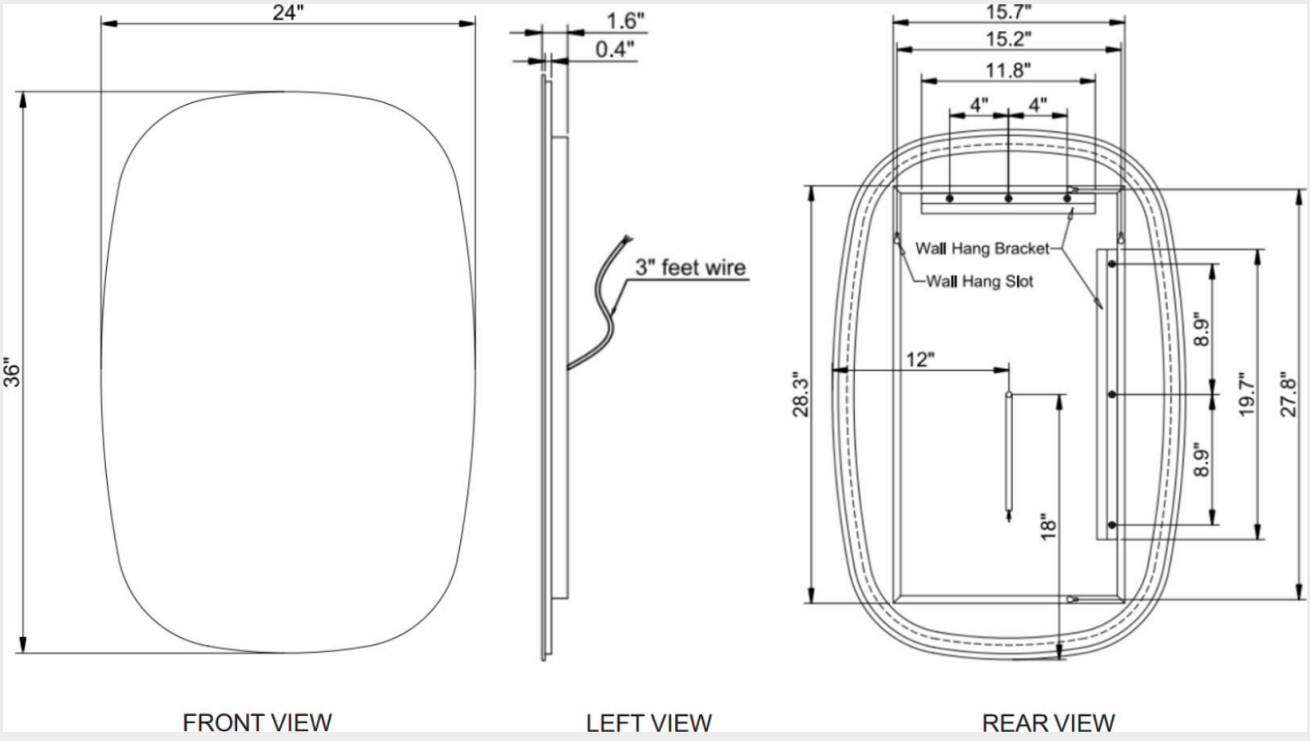


LED CAPSULE BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-CAP





DIMENSIONS: 24 × 36 IN × 1 9/16 IN

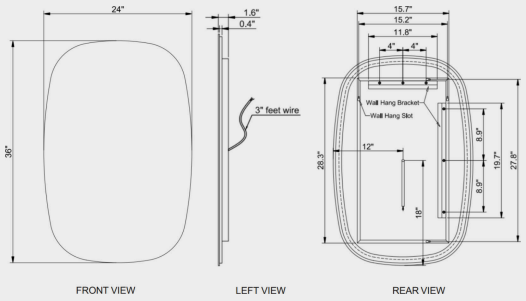

BACKLIT LED MIRROR, 1 SIZE, 4 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 24 × 36 in. It delivers 4,594 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,594 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	4,594 lm
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Size	24 × 36 in
Depth	1 9/16 in
Weight	20 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED CAPSULE BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-CAP

ORDERING

Build the product code

1 Series

LCMIR-ORIG-CAP

2 Size

2436 24 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ORIG-CAP** - **2436** - **60K**

series | 24 × 36 in | 6000K cool white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ORIG-CAP-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-ORIG-CAP-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-ORIG-CAP-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-ORIG-CAP-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW

Per size (3000K / 6000K lumens when they differ) — 24 × 36 in: 38 W, 4 594 lm, 20 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED CLOUD-SHAPED FRONT-LIT MIRROR 32×30 TO 39×38 IN

LCMIR-CLD





DIMENSIONS · 32 × 30 IN SIZE SHOWN

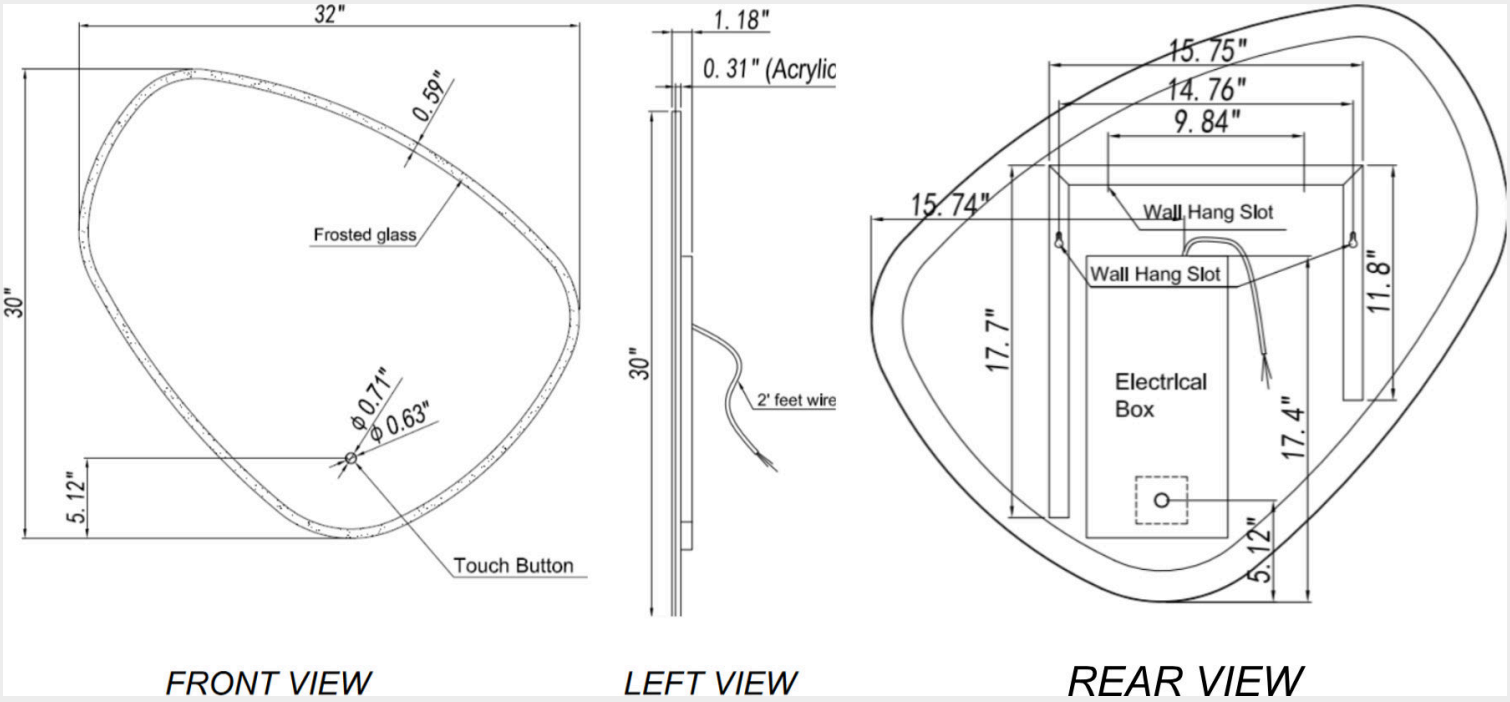


LED CLOUD-SHAPED FRONT-LIT MIRROR 32×30 TO 39×38 IN

LCMIR-CLD





DIMENSIONS · 32 × 30 IN SIZE SHOWN

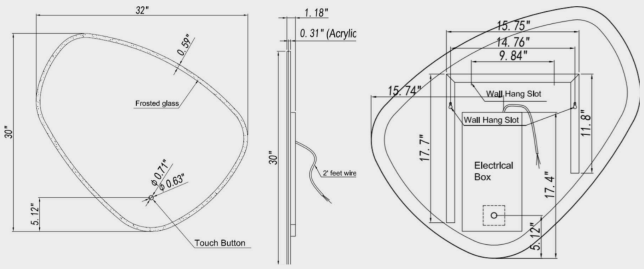

FRONT VIEW LEFT VIEW REAR VIEW

FRONT-LIT LED MIRROR, 2 SIZES

Front-lit LED mirror for the bathroom, available in 2 sizes, from 32 × 30 in to 39 × 38 in. It delivers 2,208 to 2,688 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,208 to 2,688 lm · CRI 90+
- 3 CCT by touch sensor
- Front edge-lit with subtle backlighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	23 to 28 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,208 to 2,688 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	32 × 30 · 39 × 38 in
Depth	1.2 in
Weight	15.5 to 22 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED CLOUD-SHAPED FRONT-LIT MIRROR 32×30 TO 39×38 IN

LCMIR-CLD

ORDERING

Build the product code

1 Series

`LCMIR-CLD`

2 Size

`3230` 32 × 30 in
`3938` 39 × 38 in

3 Color

`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE — `LCMIR-CLD` (series) – `3230` (32 × 30 in) – `3CCT-TS` (3000K / 4000K / 6000K by touch sensor)

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
32 × 30 in	`23 W`	`2,208 lm`	`15.5 lb`
39 × 38 in	`28 W`	`2,688 lm`	`22 lb`

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-CLD-3230-3CCT-TS`	Dimension : 32X30 · Color temperature : 3CCT selectable
`LCMIR-CLD-3938-3CCT-TS`	Dimension : 39X38 · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED CUT-CORNER FRONT-LIT MIRROR 30×36 IN 27 W - 110 V

LCMIR-LUS






DIMENSIONS: 30 × 36 IN × 1.6 IN

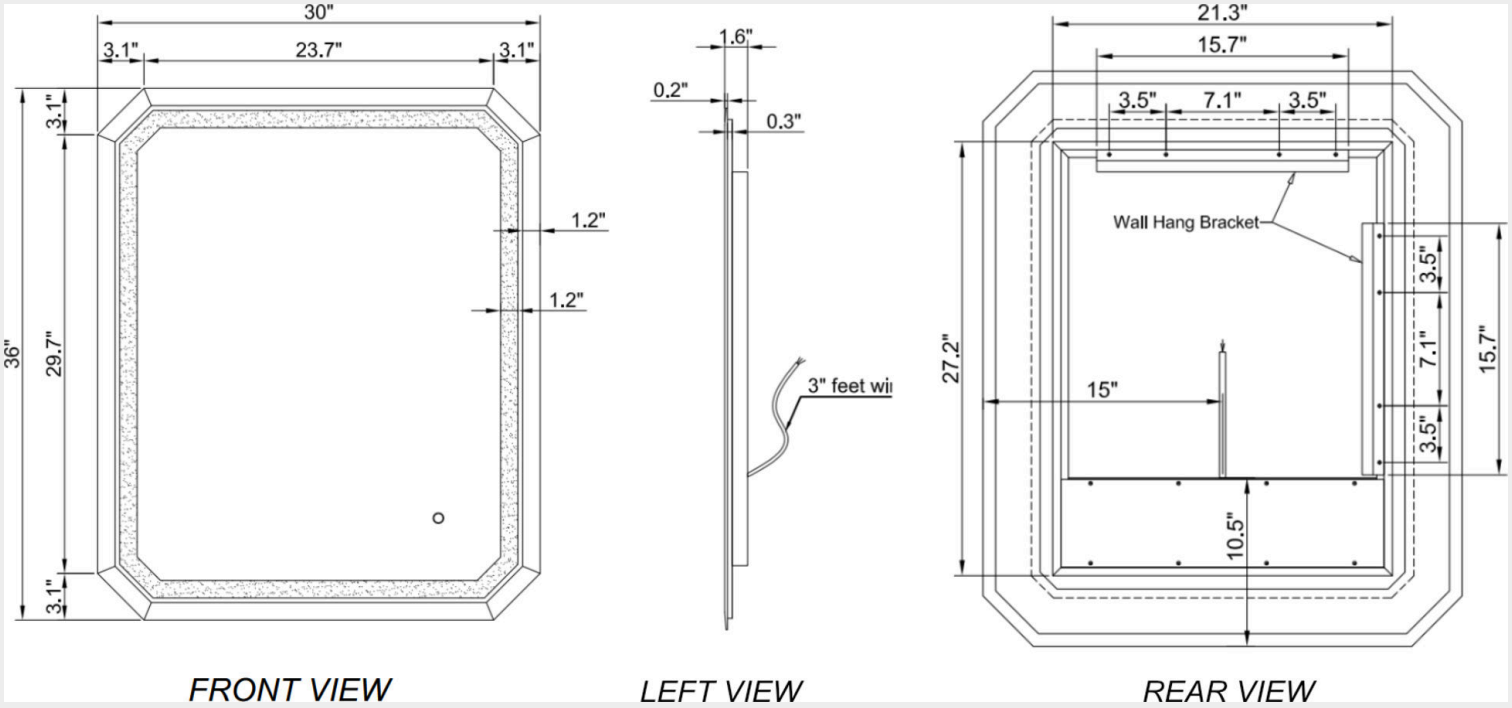


LED CUT-CORNER FRONT-LIT MIRROR 30×36 IN 27 W - 110 V

LCMIR-LUS

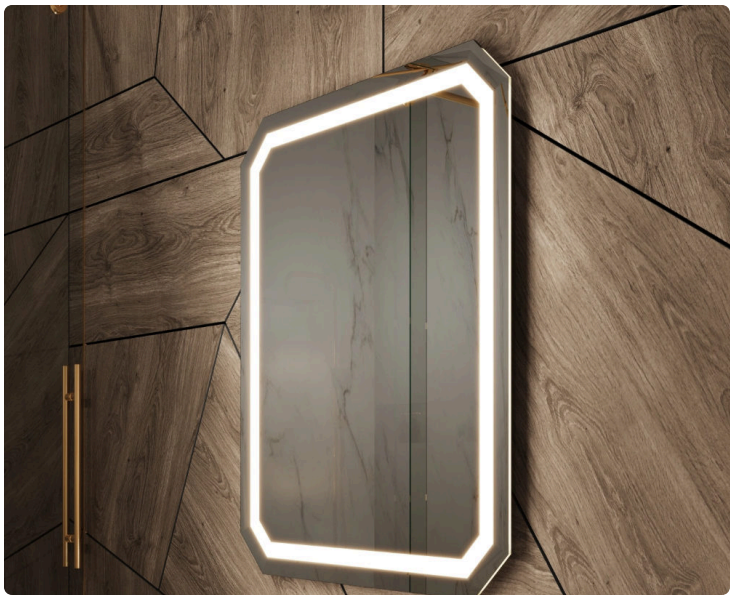



DIMENSIONS: 30 × 36 IN × 1.6 IN

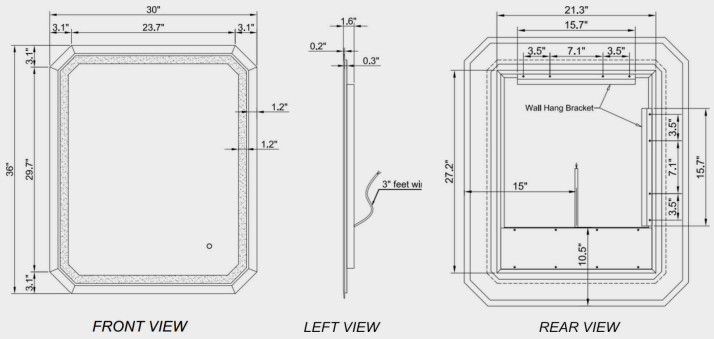

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 30 × 36 in. It delivers 2,544 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,544 lm · CRI 90+
- 3 CCT by touch sensor
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	27 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,544 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	30 × 36 in
Depth	1.6 in
Weight	25 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED CUT-CORNER FRONT-LIT MIRROR 30×36 IN 27 W - 110 V

LCMIR-LUS

ORDERING

Build the product code

1 Series
`LCMIR-LUS`

2 Size
`3036` 30 × 36 in

3 Color
`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-LUS` – `3036` – `3CCT-TS`
series | 30 × 36 in | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-LUS-3036-3CCT-TS`	Dimension : 30X36 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 30 × 36 in: 27 W, 2 544 lm, 25 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED DECORATIVE ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-RIV





DIMENSIONS: 40 × 40 IN

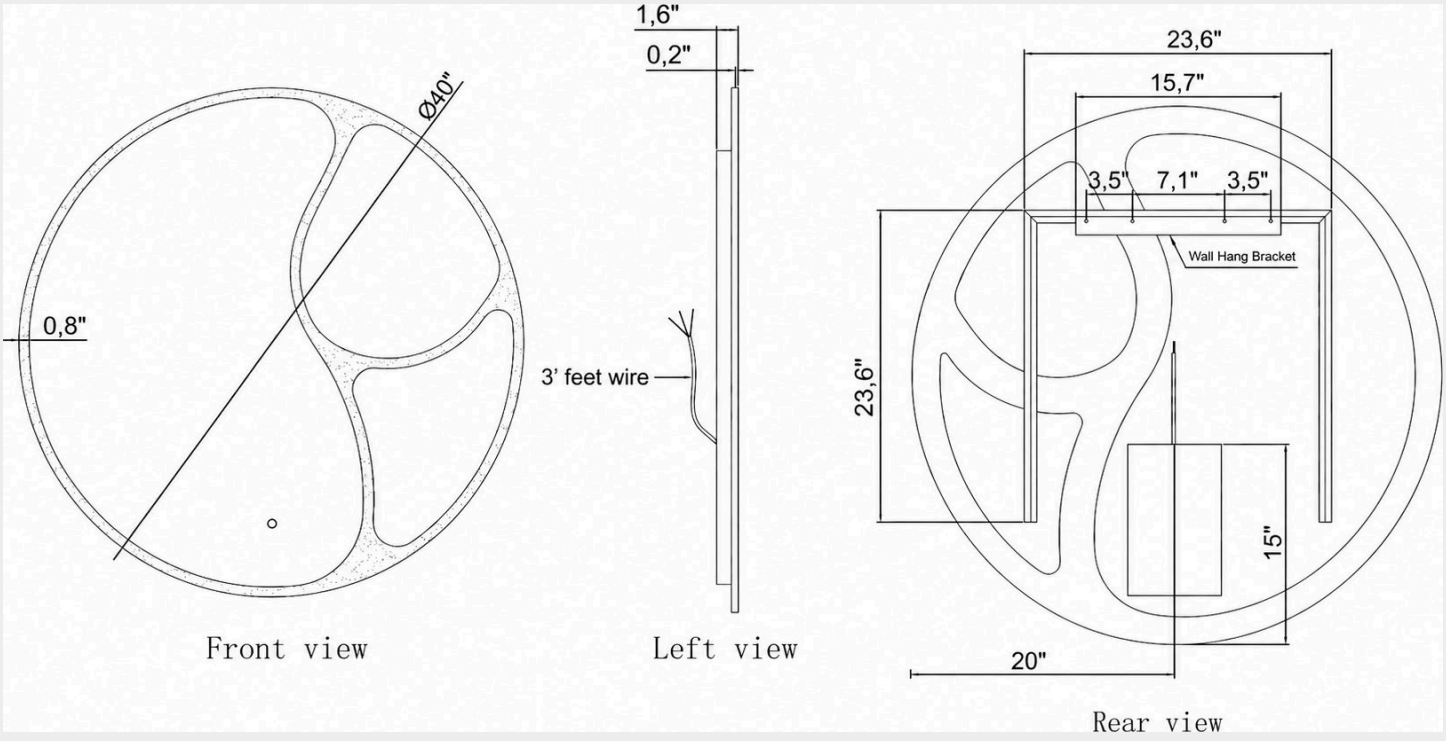


LED DECORATIVE ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-RIV





DIMENSIONS: 40 × 40 IN

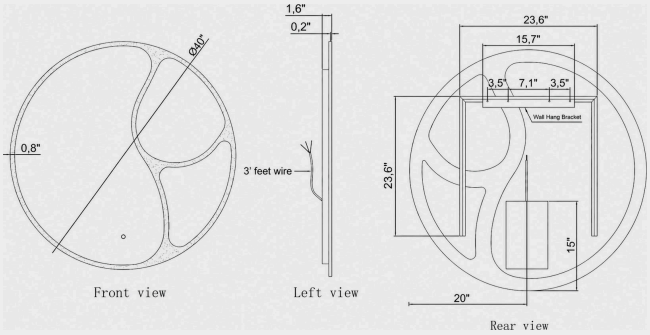

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 40 × 40 in. It delivers 5,450 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 5,450 lm · CRI 90+
- 3 CCT by touch sensor
- Front-lit with subtle backlighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	40 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	5,450 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	40 × 40 in
Weight	26 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED DECORATIVE ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-RIV

ORDERING

Build the product code

1 Series
`LCMIR-RIV`

2 Size
`4040` 40 × 40 in

3 Color
`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-RIV` – `4040` – `3CCT-TS`
series | 40 × 40 in | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-RIV-4040-3CCT-TS`	Dimension : 40X40 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 40 × 40 in: 40 W, 5 450 lm, 26 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED FRAMED ARCH FRONT-LIT MIRROR 24×36 TO 36×60 IN

LCMIR-CHIC-AR





DIMENSIONS · 24 × 36 IN SIZE SHOWN

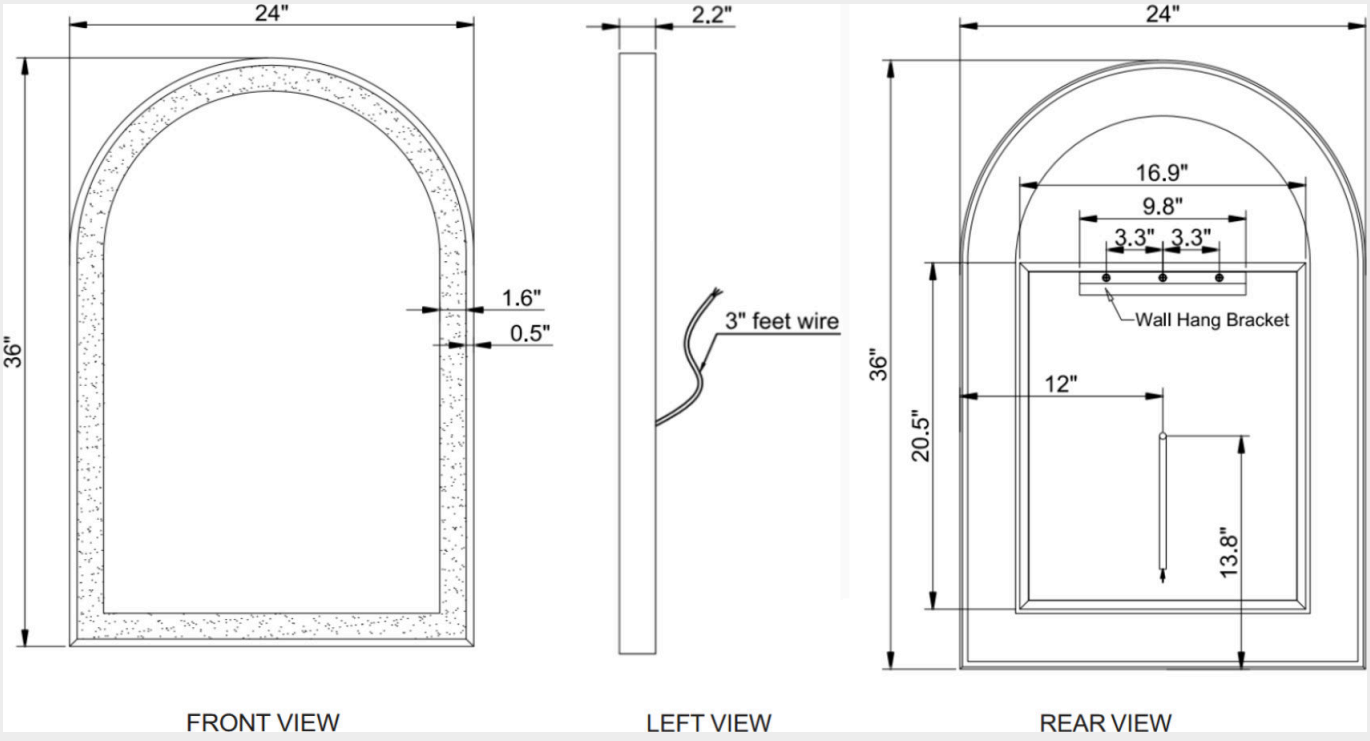


LED FRAMED ARCH FRONT-LIT MIRROR 24×36 TO 36×60 IN

LCMIR-CHIC-AR





DIMENSIONS · 24 × 36 IN SIZE SHOWN

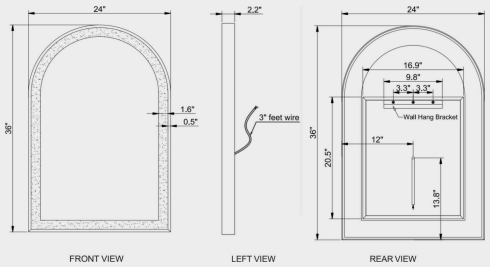

FRONT-LIT LED MIRROR, 3 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 24 × 36 in to 36 × 60 in. It delivers 4,438 to 7,328 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,438 to 7,328 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 to 65 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	4,438 to 7,328 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 28 × 48 · 36 × 60 in
Depth	2.2 in
Weight	18 to 52 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED ARCH FRONT-LIT MIRROR 24×36 TO 36×60 IN

LCMIR-CHIC-AR

ORDERING

Build the product code

1 Series

LCMIR-CHIC-AR

2 Size

2436 24 × 36 in
2848 28 × 48 in
3660 36 × 60 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-CHIC-AR** – **2436** – **BK** – **60K**

series | 24 × 36 in | black | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	**38 W**	**4,438 lm**	**18 lb**
28 × 48 in	**54 W**	**5,328 lm**	**28 lb**
36 × 60 in	**65 W**	**7,328 lm**	**52 lb**

LED FRAMED ARCH FRONT-LIT MIRROR 24×36 TO 36×60 IN

LCMIR-CHIC-AR

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CHIC-AR-2436-BK-30K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-AR-2436-BK-3CCT-TS	Dimension : 24X36 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-AR-2436-BK-60K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-AR-2436-BK-RGBW	Dimension : 24X36 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-AR-2436-GD-30K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-AR-2436-GD-3CCT-TS	Dimension : 24X36 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-AR-2436-GD-60K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-AR-2436-GD-RGBW	Dimension : 24X36 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-AR-2848-BK-30K	Dimension : 28X48 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-AR-2848-BK-3CCT-TS	Dimension : 28X48 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-AR-2848-BK-60K	Dimension : 28X48 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-AR-2848-BK-RGBW	Dimension : 28X48 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-AR-2848-GD-30K	Dimension : 28X48 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-AR-2848-GD-3CCT-TS	Dimension : 28X48 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-AR-2848-GD-60K	Dimension : 28X48 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-AR-2848-GD-RGBW	Dimension : 28X48 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-AR-3660-BK-30K	Dimension : 36X60 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-AR-3660-BK-60K	Dimension : 36X60 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-AR-3660-BK-CCT	Dimension : 36X60 · Color du cadre : Black · Color temperature : CCT ajustable
LCMIR-CHIC-AR-3660-BK-RGBW	Dimension : 36X60 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-AR-3660-GD-30K	Dimension : 36X60 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-AR-3660-GD-60K	Dimension : 36X60 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-AR-3660-GD-CCT	Dimension : 36X60 · Color du cadre : Or · Color temperature : CCT ajustable
LCMIR-CHIC-AR-3660-GD-RGBW	Dimension : 36X60 · Color du cadre : Or · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×28 IN - 120 V


LCMIR-ADIR



TEMPÉRATURE DE COULEUR / *COLOR TEMPERATURE*

Température de couleur chaude (3000K) vs. froide (6000K).

Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante


Cool white light
Bright, energizing atmosphere

Image de comparaison. Ne représente pas le produit réel.
Comparison image. Does not represent actual product.

DIMENSIONS · 48 × 28 IN SIZE SHOWN

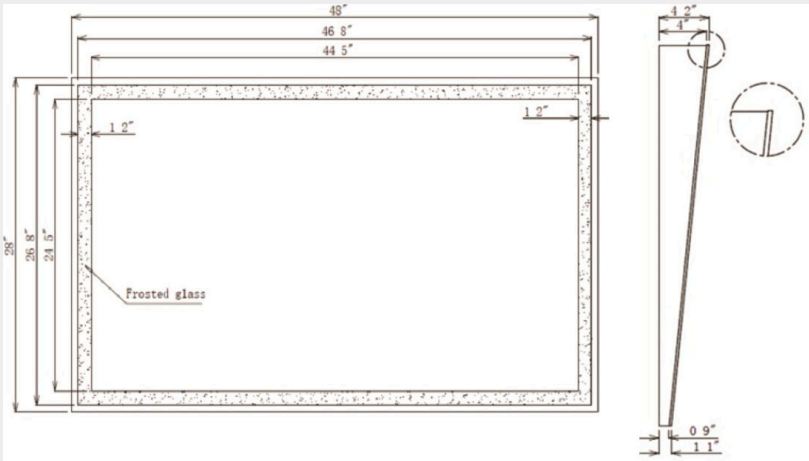

VUE DE FACE / FRONT VIEW

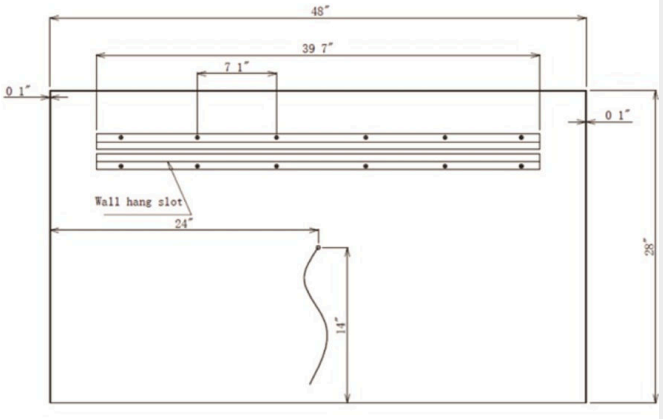

CÔTÉ / PROFIL & ARRIÈRE / BACK

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×28 IN - 120 V

LCMIR-ADIR



Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing environment

DIMENSIONS · 48 × 28 IN SIZE SHOWN

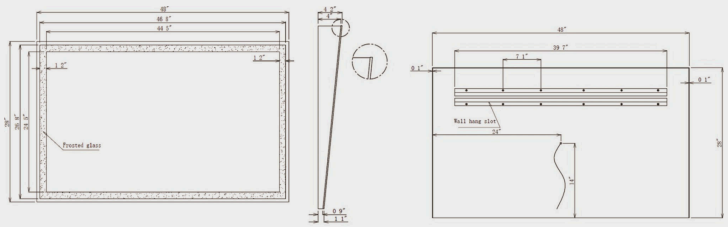

VUE DE FACE / FRONT VIEW

CÔTÉ / PROFIL & ARRIÈRE / BACK

FRONT-LIT LED MIRROR, 2 SIZES, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 2 sizes, from 24 × 32 in to 48 × 28 in. It delivers 4,320 to 6,210 lumens depending on size, with a CRI of 90+. Frame: gold, white, silver, black. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,320 to 6,210 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: gold · white · silver · black
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	38.4 to 55.2 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	4,320 to 6,210 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 48 × 28 in
Depth	4.2 in
Weight	30 to 44 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×28 IN - 120 V

LCMIR-ADIR

ORDERING

Build the product code

1 Code

LCMIR-ADIR-2432-30KG
LCMIR-ADIR-2432-30KW
LCMIR-ADIR-2432-60KG
LCMIR-ADIR-2432-60KW
LCMIR-ADIR-4828-30K
LCMIR-ADIR-4828-30KB
LCMIR-ADIR-4828-30KG
LCMIR-ADIR-4828-30KW

EXAMPLE **LCMIR-ADIR-4828-60KB**

example

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	38.4 W	4,320 lm	30 lb
48 × 28 in	55.2 W	6,210 lm	44 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ADIR-2432-30KG	Dimension : 24X32 · Color du cadre : Or · Color temperature : 3000K
LCMIR-ADIR-2432-30KW	Dimension : 24X32 · Color du cadre : White · Color temperature : 3000K
LCMIR-ADIR-2432-60KG	Dimension : 24X32 · Color du cadre : Or · Color temperature : 6000K
LCMIR-ADIR-2432-60KW	Dimension : 24X32 · Color du cadre : White · Color temperature : 6000K
LCMIR-ADIR-4828-30K	Dimension : 48X28 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-ADIR-4828-30KB	Dimension : 48X28 · Color du cadre : Black · Color temperature : 3000K
LCMIR-ADIR-4828-30KG	Dimension : 48X28 · Color du cadre : Or · Color temperature : 3000K
LCMIR-ADIR-4828-30KW	Dimension : 48X28 · Color du cadre : White · Color temperature : 3000K
LCMIR-ADIR-4828-60K	Dimension : 48X28 · Color du cadre : Silver · Color temperature : 6000K
LCMIR-ADIR-4828-60KB	Dimension : 48X28 · Color du cadre : Black · Color temperature : 6000K
LCMIR-ADIR-4828-60KG	Dimension : 48X28 · Color du cadre : Or · Color temperature : 6000K
LCMIR-ADIR-4828-60KW	Dimension : 48X28 · Color du cadre : White · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V

LCMIR-CHIC-RE






DIMENSIONS · 24 × 32 IN SIZE SHOWN

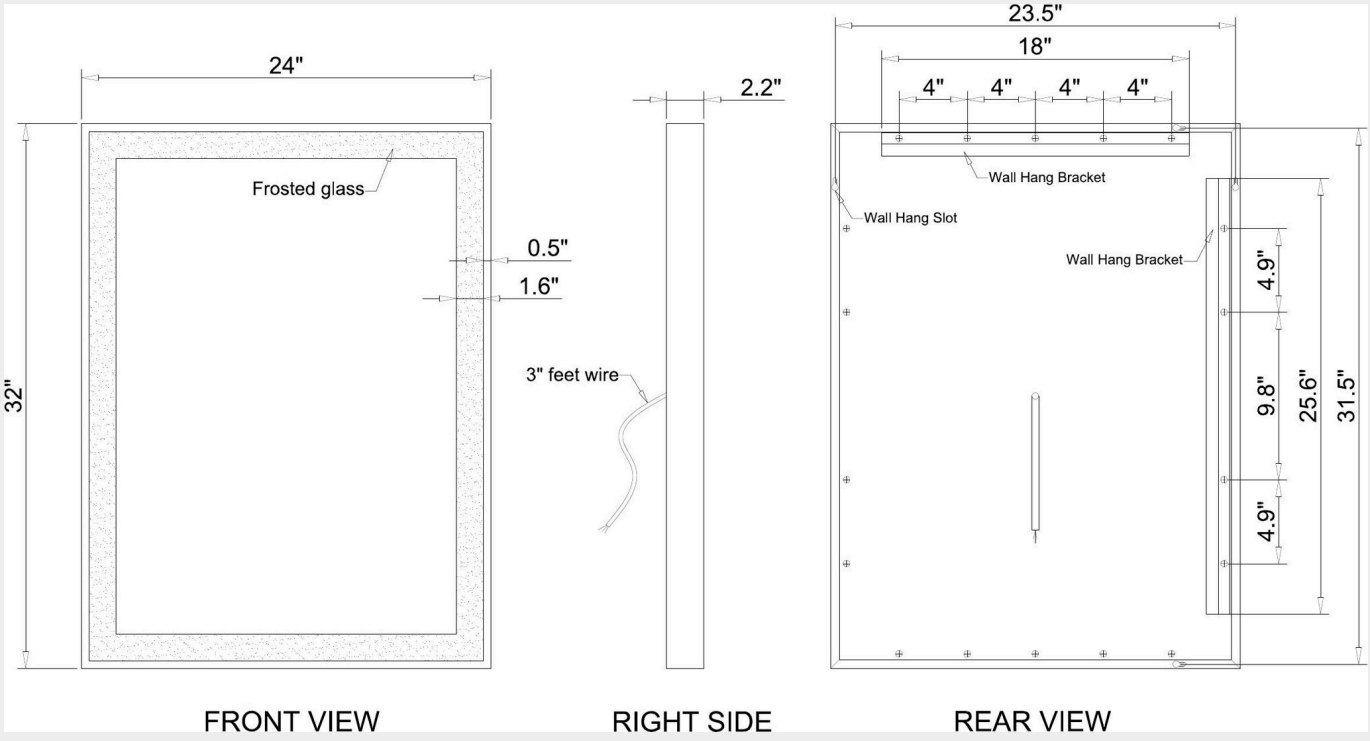


LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V

LCMIR-CHIC-RE

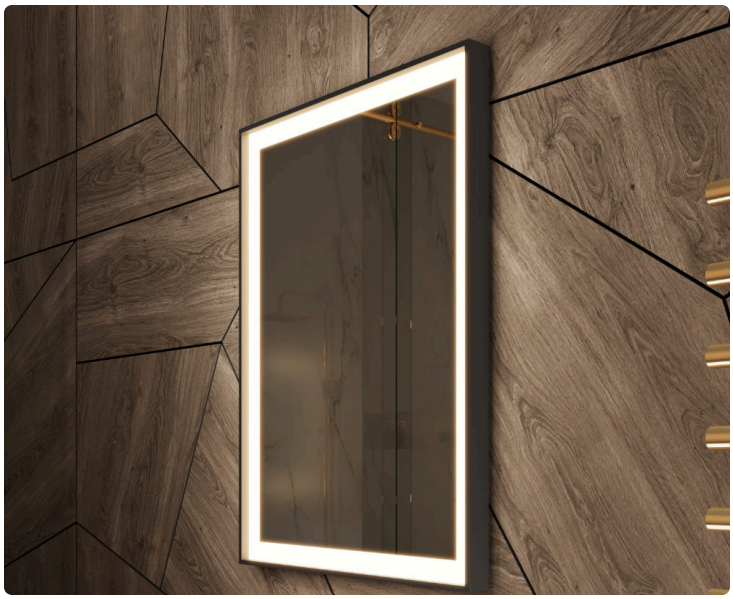



DIMENSIONS · 24 × 32 IN SIZE SHOWN

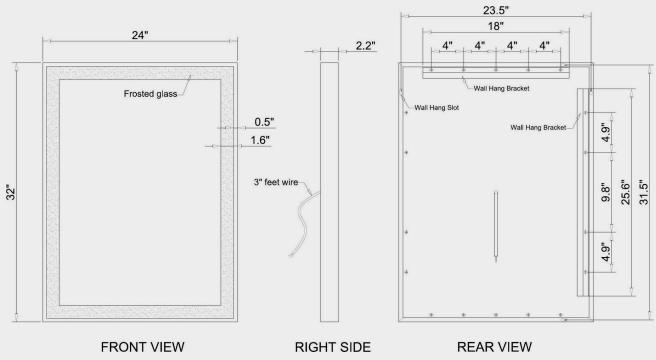

FRONT-LIT LED MIRROR, 5 SIZES, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 5 sizes, from 24 × 32 in to 48 × 35 in. It delivers 4,590 to 7,110 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec. Also available in 4 other sizes (separate sheet): 60 × 32, 70 × 45, 85 × 40, 100 × 45 in, 9 sizes in all.

FEATURES

- 4,590 to 7,110 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 to 60 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	4,590 to 7,110 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 30 × 42 · 40 × 24 · 40 × 35 · 48 × 35 in
Depth	2 · 2 1/5 in
Weight	23 to 47 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V

LCMIR-CHIC-RE

ORDERING

Build the product code

1 Series

LCMIR-CHIC-RE

2 Size

2432 24 × 32 in
3042 30 × 42 in
4024 40 × 24 in
4035 40 × 35 in
4835 48 × 35 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-CHIC-RE** – **2432** – **BK** – **60K**

series | 24 × 32 in | black | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	38 W	4,590 lm	23 lb
30 × 42 in	54 W	5,943 lm	32 lb
40 × 24 in	50 W	4,840 lm	28 lb
40 × 35 in	54 W	5,943 lm	40 lb
48 × 35 in	60 W	7,110 lm	47 lb

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V

LCMIR-CHIC-RE

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CHIC-RE-2432-BK-30K	Size: 24 × 32 in · Color: Black · 3000K
LCMIR-CHIC-RE-2432-BK-3CCT-TS	Size: 24 × 32 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-2432-BK-60K	Size: 24 × 32 in · Color: Black · 6000K
LCMIR-CHIC-RE-2432-BK-RGBW	Size: 24 × 32 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-2432-GD-30K	Size: 24 × 32 in · Color: Gold · 3000K
LCMIR-CHIC-RE-2432-GD-3CCT-TS	Size: 24 × 32 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-2432-GD-60K	Size: 24 × 32 in · Color: Gold · 6000K
LCMIR-CHIC-RE-2432-GD-RGBW	Size: 24 × 32 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-3042-BK-30K	Size: 30 × 42 in · Color: Black · 3000K
LCMIR-CHIC-RE-3042-BK-3CCT-TS	Size: 30 × 42 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-3042-BK-60K	Size: 30 × 42 in · Color: Black · 6000K
LCMIR-CHIC-RE-3042-BK-RGBW	Size: 30 × 42 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-3042-GD-30K	Size: 30 × 42 in · Color: Gold · 3000K
LCMIR-CHIC-RE-3042-GD-3CCT-TS	Size: 30 × 42 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-3042-GD-60K	Size: 30 × 42 in · Color: Gold · 6000K
LCMIR-CHIC-RE-3042-GD-RGBW	Size: 30 × 42 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-4024-BK-30K	Size: 40 × 24 in · Color: Black · 3000K
LCMIR-CHIC-RE-4024-BK-3CCT-TS	Size: 40 × 24 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4024-BK-60K	Size: 40 × 24 in · Color: Black · 6000K
LCMIR-CHIC-RE-4024-BK-RGBW	Size: 40 × 24 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-4024-GD-30K	Size: 40 × 24 in · Color: Gold · 3000K
LCMIR-CHIC-RE-4024-GD-3CCT-TS	Size: 40 × 24 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4024-GD-60K	Size: 40 × 24 in · Color: Gold · 6000K
LCMIR-CHIC-RE-4024-GD-RGBW	Size: 40 × 24 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-4035-BK-30K	Size: 40 × 35 in · Color: Black · 3000K
LCMIR-CHIC-RE-4035-BK-3CCT-TS	Size: 40 × 35 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4035-BK-60K	Size: 40 × 35 in · Color: Black · 6000K
LCMIR-CHIC-RE-4035-BK-RGBW	Size: 40 × 35 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-4035-GD-30K	Size: 40 × 35 in · Color: Gold · 3000K
LCMIR-CHIC-RE-4035-GD-3CCT-TS	Size: 40 × 35 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4035-GD-60K	Size: 40 × 35 in · Color: Gold · 6000K
LCMIR-CHIC-RE-4035-GD-RGBW	Size: 40 × 35 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-4835-BK-30K	Size: 48 × 35 in · Color: Black · 3000K
LCMIR-CHIC-RE-4835-BK-3CCT-TS	Size: 48 × 35 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4835-BK-60K	Size: 48 × 35 in · Color: Black · 6000K
LCMIR-CHIC-RE-4835-BK-RGBW	Size: 48 × 35 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-4835-GD-30K	Size: 48 × 35 in · Color: Gold · 3000K
LCMIR-CHIC-RE-4835-GD-3CCT-TS	Size: 48 × 35 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-4835-GD-60K	Size: 48 × 35 in · Color: Gold · 6000K
LCMIR-CHIC-RE-4835-GD-RGBW	Size: 48 × 35 in · Color: Gold · Multicolor RGB

LED FRAMED FRONT-LIT MIRROR 24×32 TO 48×35 IN - 110 V

LCMIR-CHIC-RE

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED FRAMED FRONT-LIT MIRROR 60×32 TO 100×45 IN - 110 V

LCMIR-CHIC-RE






DIMENSIONS · 60 × 32 IN SIZE SHOWN

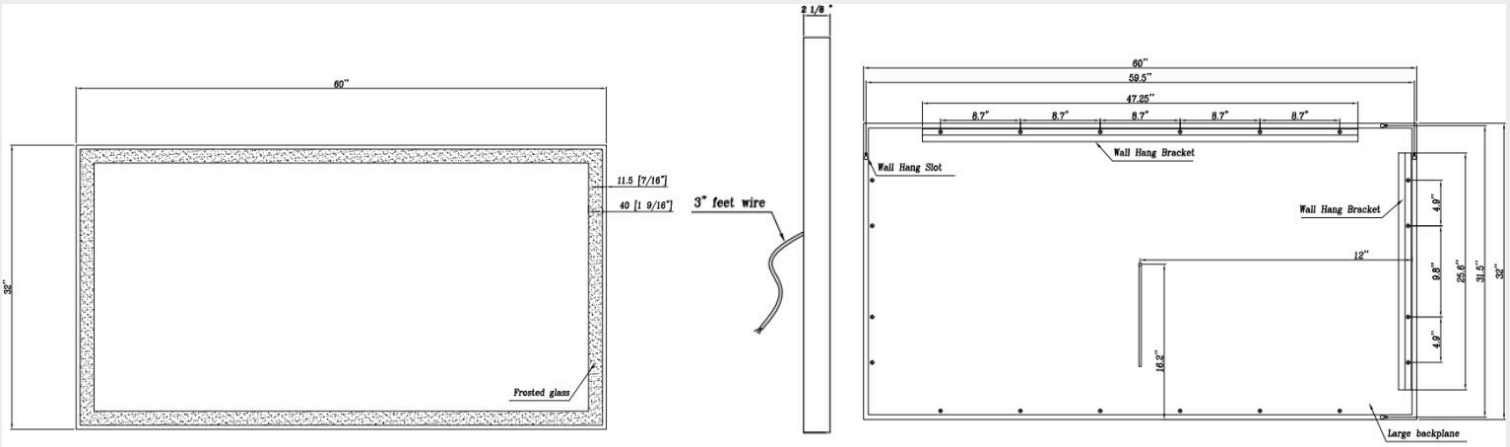

FRONT VIEW LEFT VIEW REAR VIEW


LED FRAMED FRONT-LIT MIRROR 60×32 TO 100×45 IN - 110 V

LCMIR-CHIC-RE

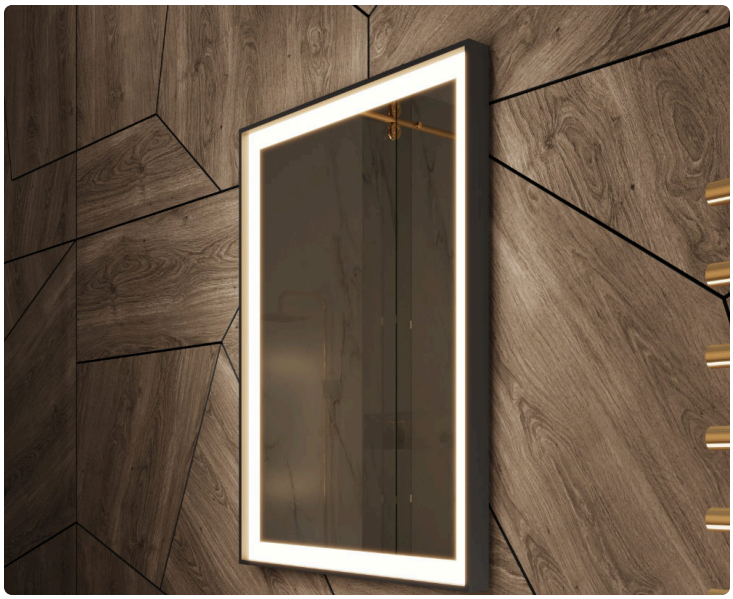



DIMENSIONS · 60 × 32 IN SIZE SHOWN

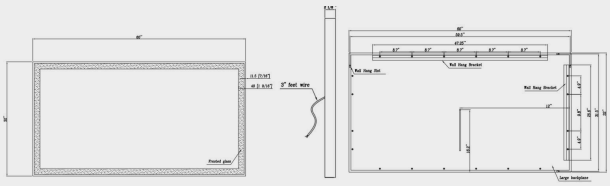

FRONT VIEW LEFT VIEW REAR VIEW

FRONT-LIT LED MIRROR, 4 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 4 sizes, from 60 × 32 in to 100 × 45 in. It delivers 7,838 to 11,900 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec. Also available in 5 other sizes (separate sheet): 24 × 32, 30 × 42, 40 × 24, 40 × 35, 48 × 35 in, 9 sizes in all.

FEATURES

- 7,838 to 11,900 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	65 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	7,838 to 11,900 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	60 × 32 · 70 × 45 · 85 × 40 · 100 × 45 in
Depth	2 in
Weight	47 to 120 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED FRONT-LIT MIRROR 60×32 TO 100×45 IN - 110 V

LCMIR-CHIC-RE

ORDERING

Build the product code

1 Series

LCMIR-CHIC-RE

2 Size

6032 60 × 32 in
7045 70 × 45 in
8540 85 × 40 in
10045 100 × 45 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-CHIC-RE** – **10045** – **BK** – **30K**
series · 100 × 45 in · black · 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
60 × 32 in	65 W	7,838 lm	47 lb
70 × 45 in	90 W	9,940 lm	85 lb
85 × 40 in	98 W	10,910 lm	94 lb
100 × 45 in	116 W	11,900 lm	120 lb

LED FRAMED FRONT-LIT MIRROR 60×32 TO 100×45 IN - 110 V

LCMIR-CHIC-RE

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CHIC-RE-10045-BK-30K	Size: 100 × 45 in · Color: Black · 3000K
LCMIR-CHIC-RE-10045-BK-60K	Size: 100 × 45 in · Color: Black · 6000K
LCMIR-CHIC-RE-10045-BK-CCT	Size: 100 × 45 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-CHIC-RE-10045-BK-RGBW	Size: 100 × 45 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-10045-GD-30K	Size: 100 × 45 in · Color: Gold · 3000K
LCMIR-CHIC-RE-10045-GD-60K	Size: 100 × 45 in · Color: Gold · 6000K
LCMIR-CHIC-RE-10045-GD-CCT	Size: 100 × 45 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-CHIC-RE-10045-GD-RGBW	Size: 100 × 45 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-6032-BK-30K	Size: 60 × 32 in · Color: Black · 3000K
LCMIR-CHIC-RE-6032-BK-3CCT-TS	Size: 60 × 32 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-6032-BK-60K	Size: 60 × 32 in · Color: Black · 6000K
LCMIR-CHIC-RE-6032-BK-RGBW	Size: 60 × 32 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-6032-GD-30K	Size: 60 × 32 in · Color: Gold · 3000K
LCMIR-CHIC-RE-6032-GD-3CCT-TS	Size: 60 × 32 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-6032-GD-60K	Size: 60 × 32 in · Color: Gold · 6000K
LCMIR-CHIC-RE-6032-GD-RGBW	Size: 60 × 32 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-7045-BK-30K	Size: 70 × 45 in · Color: Black · 3000K
LCMIR-CHIC-RE-7045-BK-3CCT-TS	Size: 70 × 45 in · Color: Black · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-7045-BK-60K	Size: 70 × 45 in · Color: Black · 6000K
LCMIR-CHIC-RE-7045-BK-RGBW	Size: 70 × 45 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-7045-GD-30K	Size: 70 × 45 in · Color: Gold · 3000K
LCMIR-CHIC-RE-7045-GD-3CCT-TS	Size: 70 × 45 in · Color: Gold · CCT touch button (3000K, 4000K, 6000K)
LCMIR-CHIC-RE-7045-GD-60K	Size: 70 × 45 in · Color: Gold · 6000K
LCMIR-CHIC-RE-7045-GD-RGBW	Size: 70 × 45 in · Color: Gold · Multicolor RGB
LCMIR-CHIC-RE-8540-BK-30K	Size: 85 × 40 in · Color: Black · 3000K
LCMIR-CHIC-RE-8540-BK-60K	Size: 85 × 40 in · Color: Black · 6000K
LCMIR-CHIC-RE-8540-BK-CCT	Size: 85 × 40 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-CHIC-RE-8540-BK-RGBW	Size: 85 × 40 in · Color: Black · Multicolor RGB
LCMIR-CHIC-RE-8540-GD-30K	Size: 85 × 40 in · Color: Gold · 3000K
LCMIR-CHIC-RE-8540-GD-60K	Size: 85 × 40 in · Color: Gold · 6000K
LCMIR-CHIC-RE-8540-GD-CCT	Size: 85 × 40 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-CHIC-RE-8540-GD-RGBW	Size: 85 × 40 in · Color: Gold · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FRAMED FROSTED BACKLIT MIRROR 24×32 TO 48×28 IN

LCMIR-OPE






DIMENSIONS · 24 × 32 IN SIZE SHOWN

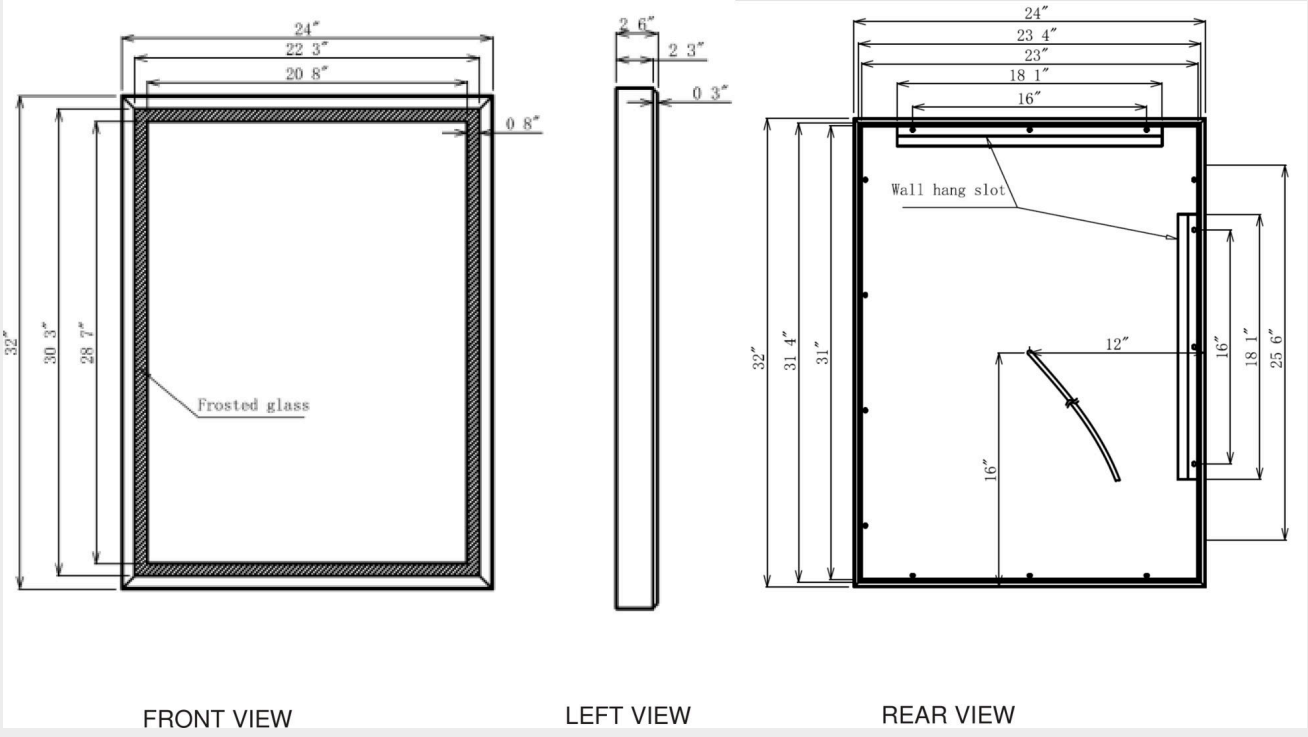


LED FRAMED FROSTED BACKLIT MIRROR 24×32 TO 48×28 IN

LCMIR-OPE



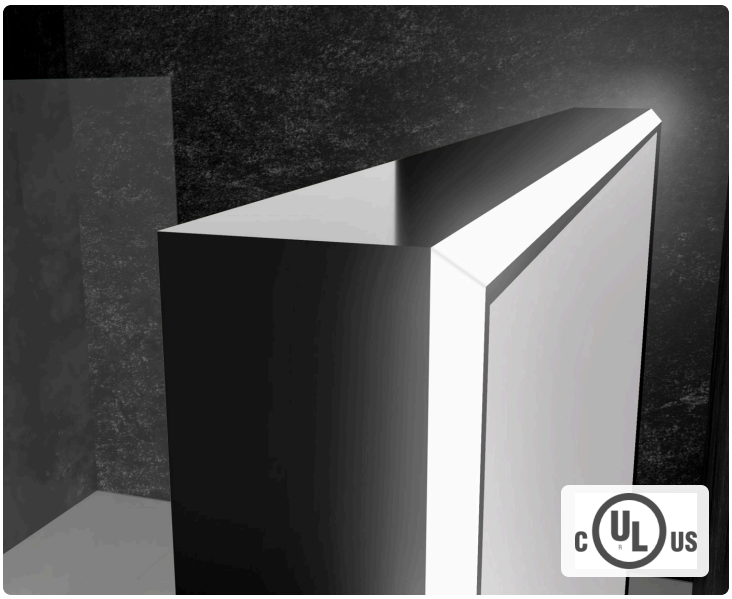

DIMENSIONS · 24 × 32 IN SIZE SHOWN

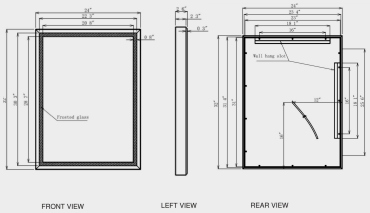

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 2 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 2 sizes, from 24 × 32 in to 48 × 28 in. It delivers 9,450 to 13,140 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec. Also available in 4 other sizes (separate sheet): 48 × 35, 60 × 28, 70 × 30, 70 × 32 in, 6 sizes in all.

FEATURES

- 9,450 to 13,140 lm · CRI 90+
- 3000K · 6000K · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	84 to 117 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	9,450 to 13,140 lm depending on size
CRI	90+
Color	30K · 60K · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 48 × 28 in
Depth	2 9/16 in
Weight	26 to 40 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

- ✓ Dry
- ✗ Damp (covered)
- ✗ Wet

LED FRAMED FROSTED BACKLIT MIRROR 24×32 TO 48×28 IN

LCMIR-OPE

ORDERING

Build the product code

1 Series

LCMIR-OPE

2 Size

2432 24 × 32 in
4828 48 × 28 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-OPE** – **2432** – **BK** – **60K**
series · 24 × 32 in · black · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	**84 W**	**9,450 lm**	**26 lb**
48 × 28 in	**117 W**	**13,140 lm**	**40 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-OPE-2432-BK-30K	Size: 24 × 32 in · Color: Black · 3000K
LCMIR-OPE-2432-BK-60K	Size: 24 × 32 in · Color: Black · 6000K
LCMIR-OPE-2432-BK-CCT	Size: 24 × 32 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-OPE-2432-BK-RGBW	Size: 24 × 32 in · Color: Black · Multicolor RGB
LCMIR-OPE-2432-GD-30K	Size: 24 × 32 in · Color: Gold · 3000K
LCMIR-OPE-2432-GD-60K	Size: 24 × 32 in · Color: Gold · 6000K
LCMIR-OPE-2432-GD-CCT	Size: 24 × 32 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-OPE-2432-GD-RGBW	Size: 24 × 32 in · Color: Gold · Multicolor RGB
LCMIR-OPE-4828-BK-30K	Size: 48 × 28 in · Color: Black · 3000K
LCMIR-OPE-4828-BK-60K	Size: 48 × 28 in · Color: Black · 6000K
LCMIR-OPE-4828-BK-CCT	Size: 48 × 28 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-OPE-4828-BK-RGBW	Size: 48 × 28 in · Color: Black · Multicolor RGB
LCMIR-OPE-4828-GD-30K	Size: 48 × 28 in · Color: Gold · 3000K
LCMIR-OPE-4828-GD-60K	Size: 48 × 28 in · Color: Gold · 6000K
LCMIR-OPE-4828-GD-CCT	Size: 48 × 28 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-OPE-4828-GD-RGBW	Size: 48 × 28 in · Color: Gold · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FRAMED FROSTED BACKLIT MIRROR 48×35 TO 70×32 IN

LCMIR-OPE






DIMENSIONS · 24 × 32 IN SIZE SHOWN

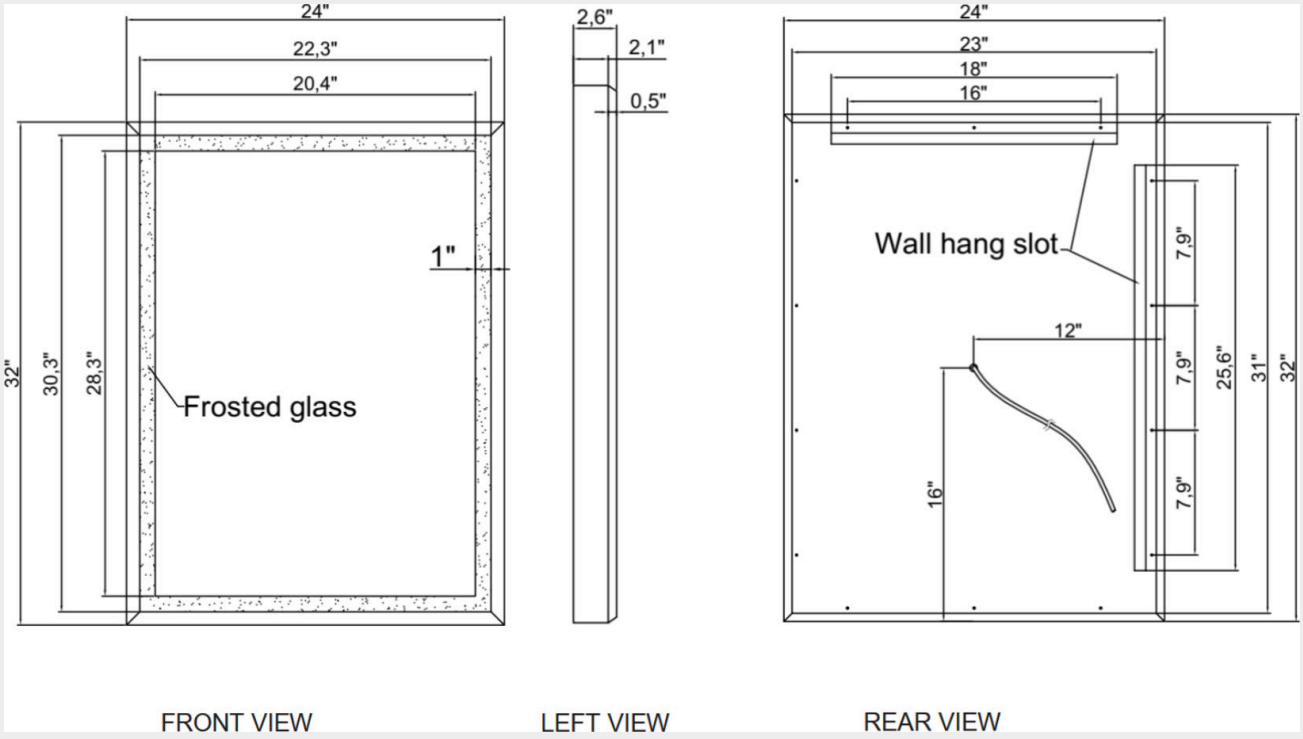


LED FRAMED FROSTED BACKLIT MIRROR 48×35 TO 70×32 IN

LCMIR-OPE



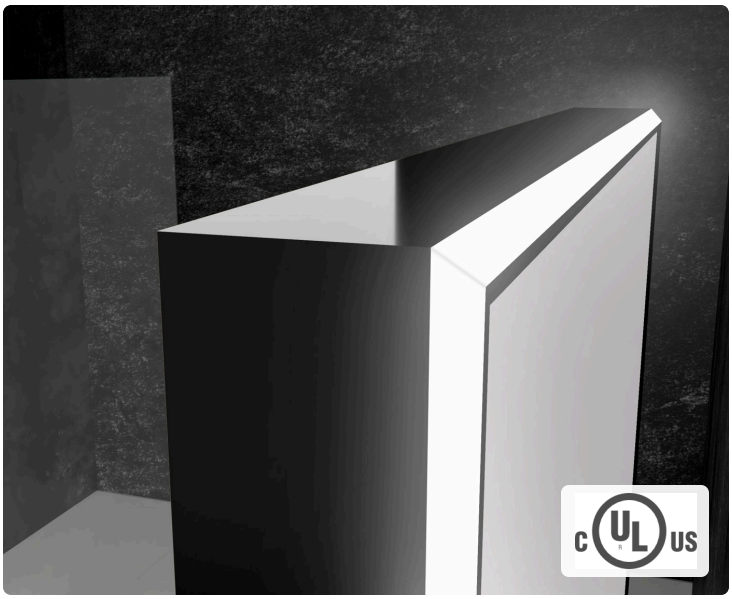

DIMENSIONS · 24 × 32 IN SIZE SHOWN

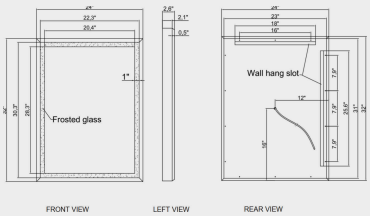

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 4 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 4 sizes, from 48 × 35 in to 70 × 32 in. It delivers 14,400 to 17,460 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec. Also available in 2 other sizes (separate sheet): 24 × 32, 48 × 28 in, 6 sizes in all.

FEATURES

- 14,400 to 17,460 lm · CRI 90+
- 3000K · 6000K · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	128 to 155.2 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	14,400 to 17,460 lm depending on size
CRI	90+
Color	30K · 60K · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 35 · 60 × 28 · 70 × 30 · 70 × 32 in
Depth	2 9/16 in
Weight	41.8 to 83.8 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED FROSTED BACKLIT MIRROR 48×35 TO 70×32 IN

LCMIR-OPE

ORDERING

Build the product code

1 Series

LCMIR-OPE

2 Size

4835 48 × 35 in
6028 60 × 28 in
7030 70 × 30 in
7032 70 × 32 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-OPE** – **4835** – **BK** – **30K**
series · 48 × 35 in · black · 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 35 in	128 W	14,400 lm	41.8 lb
60 × 28 in	136 W	15,300 lm	60 lb
70 × 30 in	155.2 W	17,460 lm	83.8 lb
70 × 32 in	–	–	–

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-OPE-4835-BK-30K	Size: 48 × 35 in · Color: Black · 3000K
LCMIR-OPE-4835-BK-60K	Size: 48 × 35 in · Color: Black · 6000K
LCMIR-OPE-4835-BK-CCT	Size: 48 × 35 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-OPE-4835-BK-RGBW	Size: 48 × 35 in · Color: Black · Multicolor RGB
LCMIR-OPE-4835-GD-30K	Size: 48 × 35 in · Color: Gold · 3000K
LCMIR-OPE-4835-GD-60K	Size: 48 × 35 in · Color: Gold · 6000K
LCMIR-OPE-4835-GD-CCT	Size: 48 × 35 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-OPE-4835-GD-RGBW	Size: 48 × 35 in · Color: Gold · Multicolor RGB
LCMIR-OPE-6028-BK-30K	Size: 60 × 28 in · Color: Black · 3000K
LCMIR-OPE-6028-BK-60K	Size: 60 × 28 in · Color: Black · 6000K
LCMIR-OPE-6028-BK-CCT	Size: 60 × 28 in · Color: Black · Tunable white, remote (2700K-6000K)
LCMIR-OPE-6028-BK-RGBW	Size: 60 × 28 in · Color: Black · Multicolor RGB
LCMIR-OPE-6028-GD-30K	Size: 60 × 28 in · Color: Gold · 3000K
LCMIR-OPE-6028-GD-60K	Size: 60 × 28 in · Color: Gold · 6000K
LCMIR-OPE-6028-GD-CCT	Size: 60 × 28 in · Color: Gold · Tunable white, remote (2700K-6000K)
LCMIR-OPE-6028-GD-RGBW	Size: 60 × 28 in · Color: Gold · Multicolor RGB
LCMIR-OPE-7030-BK-30K	Size: 70 × 30 in · Color: Black · 3000K
LCMIR-OPE-7030-BK-60K	Size: 70 × 30 in · Color: Black · 6000K
LCMIR-OPE-7030-GD-30K	Size: 70 × 30 in · Color: Gold · 3000K
LCMIR-OPE-7030-GD-60K	Size: 70 × 30 in · Color: Gold · 6000K

LED FRAMED FROSTED BACKLIT MIRROR 48×35 TO 70×32 IN

LCMIR-OPE

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FRAMED OVAL FRONT-LIT MIRROR 18×36 IN 24 W - 110 V

LCMIR-OLY





DIMENSIONS: 18 × 36 IN

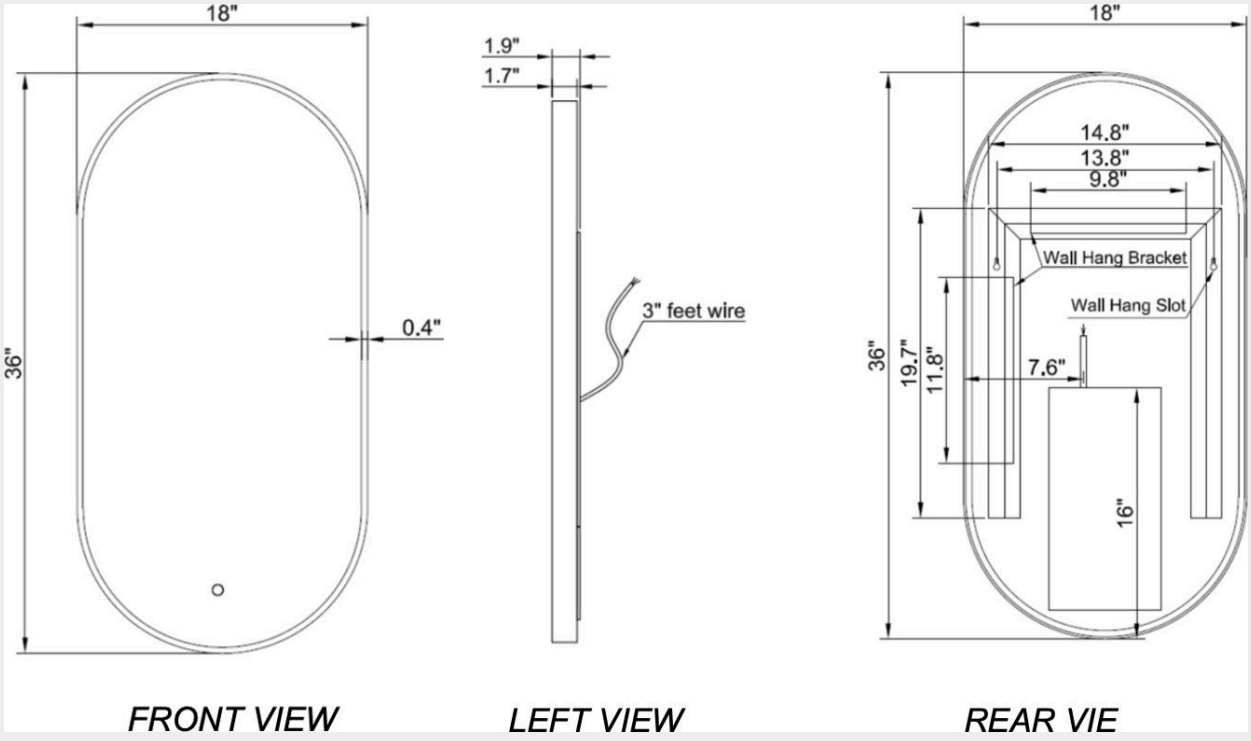


LED FRAMED OVAL FRONT-LIT MIRROR 18×36 IN 24 W - 110 V

LCMIR-OLY





DIMENSIONS: 18 × 36 IN

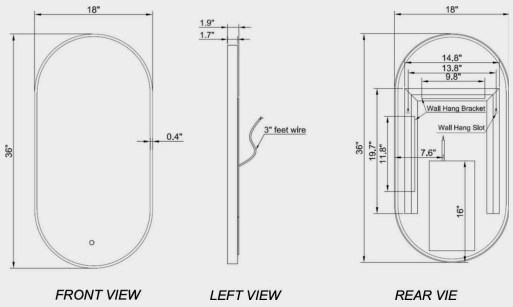

FRONT VIEW LEFT VIEW REAR VIE

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 18 × 36 in. It delivers 2,400 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Frame: black, gold. Hard-wired to the circuit.

FEATURES

- 2,400 lm · CRI 90+
- 3 CCT by touch sensor
- Frame: black · gold
- Inner frame trim lighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	24 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,400 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	18 × 36 in
Weight	15 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED OVAL FRONT-LIT MIRROR 18×36 IN 24 W - 110 V

LCMIR-OLY

ORDERING

Build the product code

1 Series	2 Size	3 Frame	4 Color
LCMIR-OLY	**1836** 18 × 36 in	**BK** black **GD** gold	**3CCT-TS** 3000K / 4000K / 6000K by touch sensor

EXAMPLE

LCMIR-OLY	-	1836	-	BK	-	3CCT-TS
series		18 × 36 in		black		3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-OLY-1836-BK-3CCT-TS	Dimension : 18X36 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-OLY-1836-GD-3CCT-TS	Dimension : 18X36 · Color du cadre : Or · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 18 × 36 in: 24 W, 2 400 lm, 15 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED FRAMED OVAL FRONT-LIT MIRROR 24×36 TO 32×60 IN

LCMIR-CHIC-OV





DIMENSIONS · 24 × 36 IN SIZE SHOWN

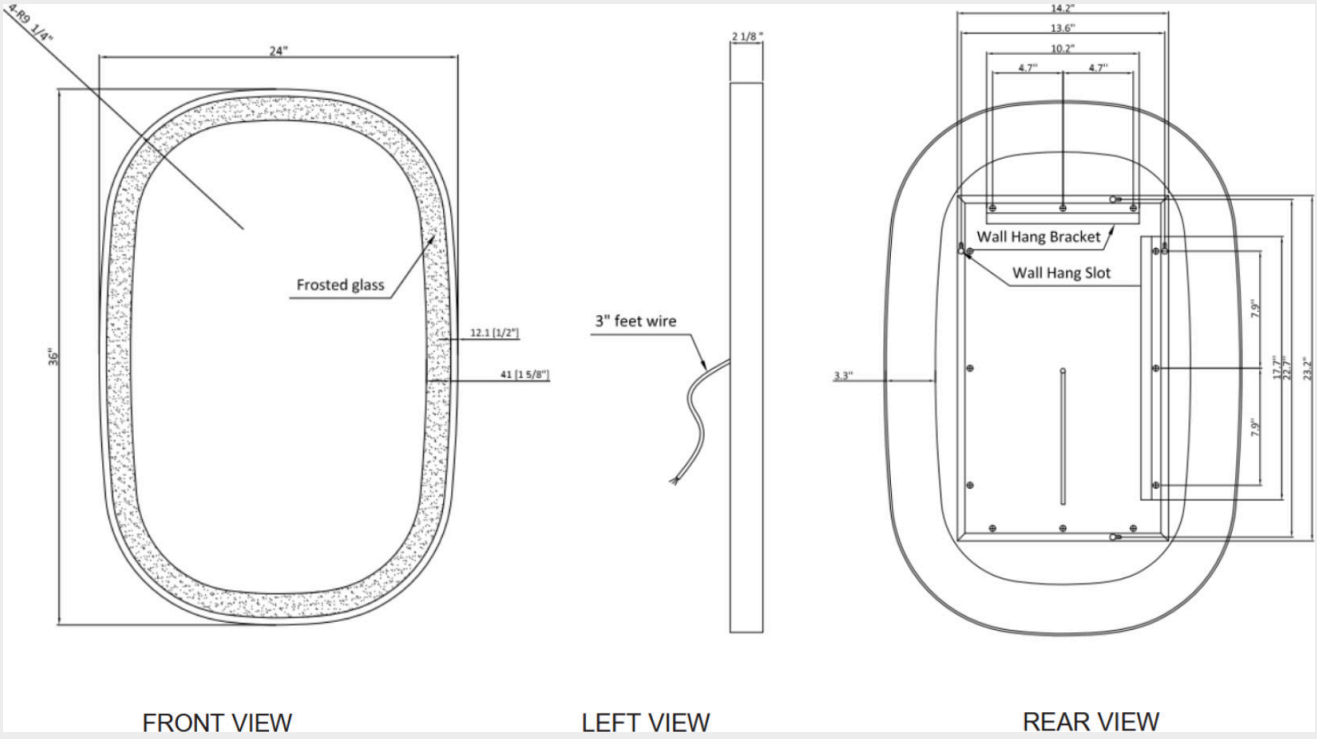


LED FRAMED OVAL FRONT-LIT MIRROR 24×36 TO 32×60 IN

LCMIR-CHIC-OV





DIMENSIONS · 24 × 36 IN SIZE SHOWN

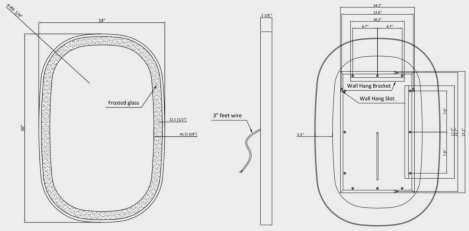

FRONT-LIT LED MIRROR, 3 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 24 × 36 in to 32 × 60 in. It delivers 3,555 to 5,450 lumens depending on size, with a CRI of 90+. Frame: gold, black. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,555 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: gold · black
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 50 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,555 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 28 × 48 · 32 × 60 in
Depth	1 5/8 · 2 in
Weight	20 to 39 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED OVAL FRONT-LIT MIRROR 24×36 TO 32×60 IN

LCMIR-CHIC-OV

ORDERING

Build the product code

1 Code

```
LCMIR-CHIC-OV-2436-BK-30K
LCMIR-CHIC-OV-2436-BK-3CCT-TS
LCMIR-CHIC-OV-2436-BK-60K
LCMIR-CHIC-OV-2436-BK-RGBW
LCMIR-CHIC-OV-2436-GD-30K
LCMIR-CHIC-OV-2436-GD-3CCT-TS
LCMIR-CHIC-OV-2436-GD-60K
LCMIR-CHIC-OV-2436-GD-RGBW
```

EXAMPLE **LCMIR-CHIC-OV-2436-BK-60K**

example

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	35 W	4,256 lm	20 lb
28 × 48 in	50 W	5,450 lm	32 lb
32 × 60 in	30 W	3,555 lm	39 lb

LED FRAMED OVAL FRONT-LIT MIRROR 24×36 TO 32×60 IN

LCMIR-CHIC-OV

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CHIC-OV-2436-BK-30K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-OV-2436-BK-3CCT-TS	Dimension : 24X36 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-2436-BK-60K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-OV-2436-BK-RGBW	Dimension : 24X36 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-OV-2436-GD-30K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-OV-2436-GD-3CCT-TS	Dimension : 24X36 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-2436-GD-60K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-OV-2436-GD-RGBW	Dimension : 24X36 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-OV-2848-BK-30K	Dimension : 28X48 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-OV-2848-BK-3CCT-TS	Dimension : 28X48 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-2848-BK-60K	Dimension : 28X48 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-OV-2848-BK-RGBW	Dimension : 28X48 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-OV-2848-GD-30K	Dimension : 28X48 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-OV-2848-GD-3CCT-TS	Dimension : 28X48 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-2848-GD-60K	Dimension : 28X48 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-OV-2848-GD-RGBW	Dimension : 28X48 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-OV-3260-BK-30K	Dimension : 32X60 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-OV-3260-BK-3CCT-TS	Dimension : 32X60 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-3260-BK-60K	Dimension : 32X60 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-OV-3260-BK-CCT	Dimension : 32X60 · Color du cadre : Black · Color temperature : CCT ajustable
LCMIR-CHIC-OV-3260-BK-RGBW	Dimension : 32X60 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-OV-3260-GD-30K	Dimension : 32X60 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-OV-3260-GD-3CCT-TS	Dimension : 32X60 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-OV-3260-GD-60K	Dimension : 32X60 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-OV-3260-GD-CCT	Dimension : 32X60 · Color du cadre : Or · Color temperature : CCT ajustable
LCMIR-CHIC-OV-3260-GD-RGBW	Dimension : 32X60 · Color du cadre : Or · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FRAMED RING FRONT-LIT MIRROR 24×32 IN 30 W - 110 V

LCMIR-SOL





DIMENSIONS: 24 × 32 IN × 3 1/2 IN

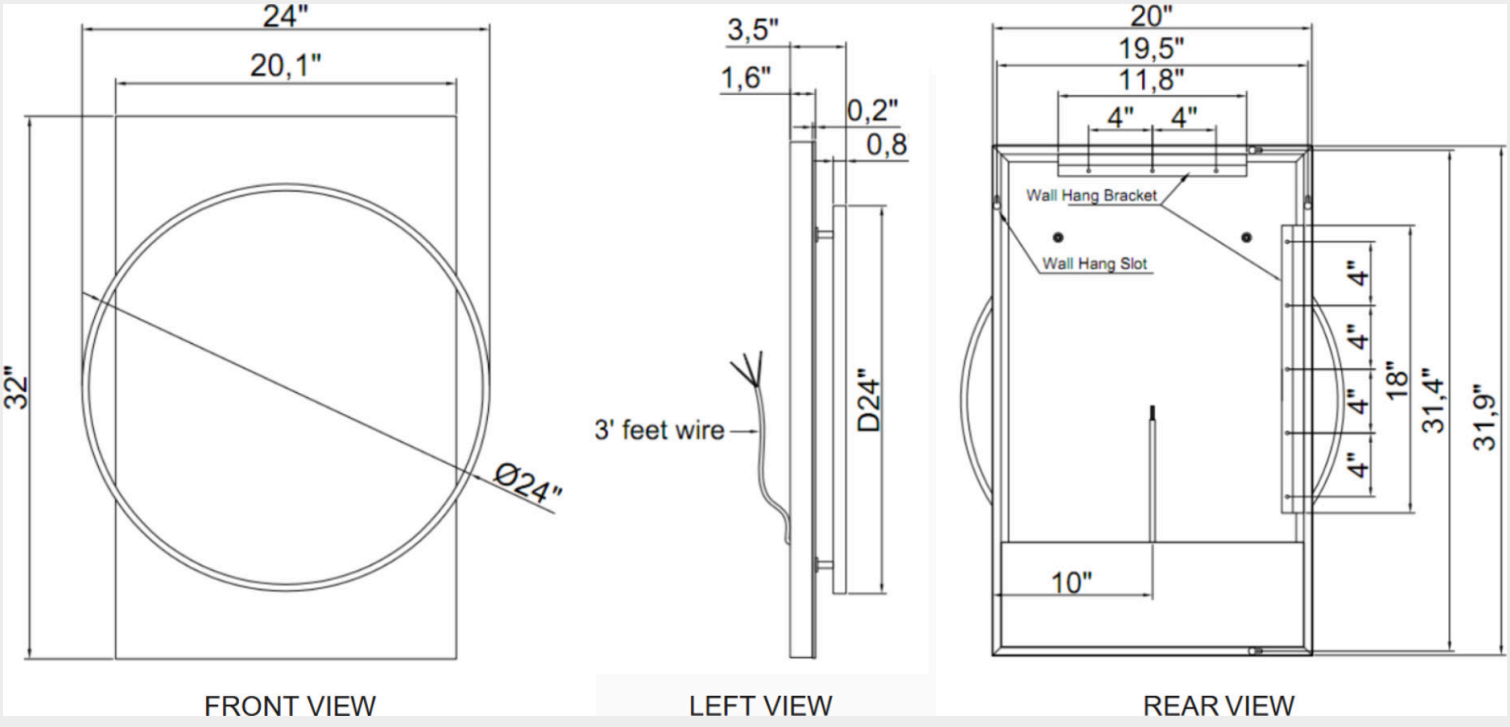


LED FRAMED RING FRONT-LIT MIRROR 24×32 IN 30 W - 110 V

LCMIR-SOL





DIMENSIONS: 24 × 32 IN × 3 1/2 IN

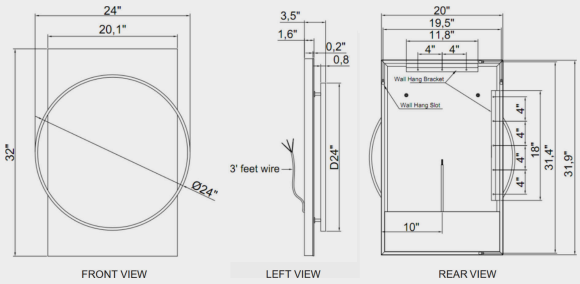

FRONT-LIT LED MIRROR, 1 SIZE, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 24 × 32 in. It delivers 3,040 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,040 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- Inner frame trim lighting
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	3,040 lm
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	24 × 32 in
Depth	3 1/2 in
Weight	24 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED RING FRONT-LIT MIRROR 24×32 IN 30 W - 110 V

LCMIR-SOL

ORDERING

Build the product code

1 Series
`LCMIR-SOL`

2 Size
`2432` 24 × 32 in

3 Frame
`BK` black
`GD` gold

4 Color
`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE — `LCMIR-SOL` (series) - `2432` (24 × 32 in) - `BK` (black) - `60K` (6000K cool white)

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-SOL-2432-BK-30K`	Dimension : 24X32 · Color du cadre : Black · Color temperature : 3000K
`LCMIR-SOL-2432-BK-60K`	Dimension : 24X32 · Color du cadre : Black · Color temperature : 6000K
`LCMIR-SOL-2432-GD-30K`	Dimension : 24X32 · Color du cadre : Or · Color temperature : 3000K
`LCMIR-SOL-2432-GD-60K`	Dimension : 24X32 · Color du cadre : Or · Color temperature : 6000K

Per size (3000K / 6000K lumens when they differ) — 24 × 32 in: 30 W, 3 040 lm, 24 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED FRAMED ROUND FRONT-LIT MIRROR 24×24 TO 40×40 IN

LCMIR-CHIC-RO





DIMENSIONS · 24 × 24 IN SIZE SHOWN

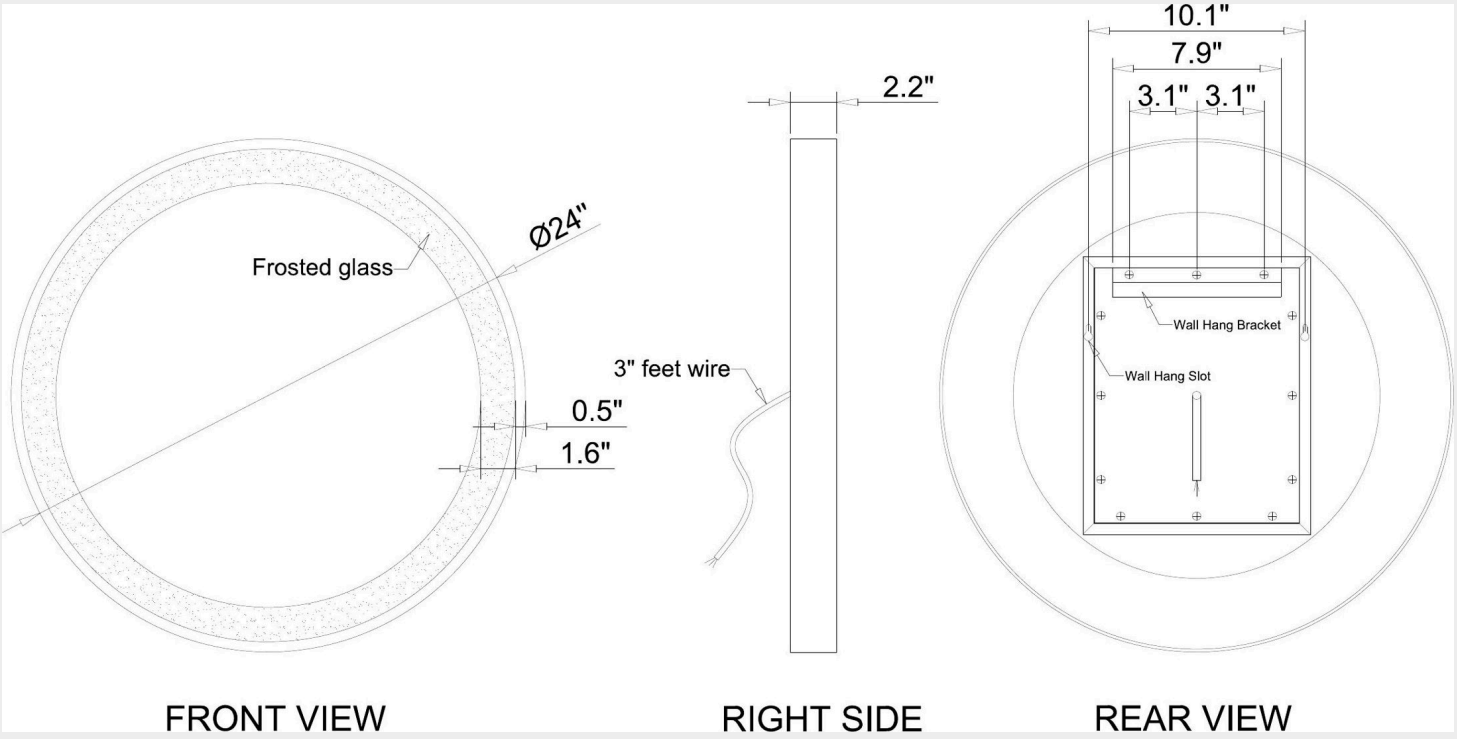


LED FRAMED ROUND FRONT-LIT MIRROR 24×24 TO 40×40 IN

LCMIR-CHIC-RO





DIMENSIONS · 24 × 24 IN SIZE SHOWN

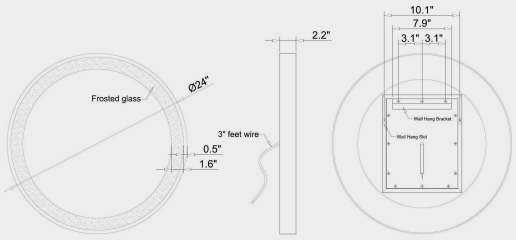

FRONT-LIT LED MIRROR, 3 SIZES, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 24 × 24 in to 40 × 40 in. It delivers 3,555 to 5,455 lumens depending on size, with a CRI of 90+. Frame: black, gold. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,555 to 5,455 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 50 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	3,555 to 5,455 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 24 · 32 × 32 · 40 × 40 in
Depth	1 5/8 · 2 · 2.2 in
Weight	12 to 31 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED ROUND FRONT-LIT MIRROR 24×24 TO 40×40 IN

LCMIR-CHIC-RO

ORDERING

Build the product code

1 Series

LCMIR-CHIC-RO

2 Size

2424 24 × 24 in
3232 32 × 32 in
4040 40 × 40 in

3 Frame

BK black
GD gold

4 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-CHIC-RO** – **2424** – **BK** – **60K**

series | 24 × 24 in | black | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 24 in	**30 W**	**3,555 lm**	**12 lb**
32 × 32 in	**35 W**	**4,250 lm**	**18 lb**
40 × 40 in	**50 W**	**5,455 lm**	**31 lb**

LED FRAMED ROUND FRONT-LIT MIRROR 24×24 TO 40×40 IN

LCMIR-CHIC-RO

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CHIC-RO-2424-BK-30K	Dimension : 24X24 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-RO-2424-BK-3CCT-TS	Dimension : 24X24 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-2424-BK-60K	Dimension : 24X24 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-RO-2424-BK-RGBW	Dimension : 24X24 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-RO-2424-GD-30K	Dimension : 24X24 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-RO-2424-GD-3CCT-TS	Dimension : 24X24 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-2424-GD-60K	Dimension : 24X24 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-RO-2424-GD-RGBW	Dimension : 24X24 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-RO-3232-BK-30K	Dimension : 32X32 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-RO-3232-BK-3CCT-TS	Dimension : 32X32 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-3232-BK-60K	Dimension : 32X32 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-RO-3232-BK-RGBW	Dimension : 32X32 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-RO-3232-GD-30K	Dimension : 32X32 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-RO-3232-GD-3CCT-TS	Dimension : 32X32 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-3232-GD-60K	Dimension : 32X32 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-RO-3232-GD-RGBW	Dimension : 32X32 · Color du cadre : Or · Color temperature : RGBW
LCMIR-CHIC-RO-4040-BK-30K	Dimension : 40X40 · Color du cadre : Black · Color temperature : 3000K
LCMIR-CHIC-RO-4040-BK-3CCT-TS	Dimension : 40X40 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-4040-BK-60K	Dimension : 40X40 · Color du cadre : Black · Color temperature : 6000K
LCMIR-CHIC-RO-4040-BK-RGBW	Dimension : 40X40 · Color du cadre : Black · Color temperature : RGBW
LCMIR-CHIC-RO-4040-GD-30K	Dimension : 40X40 · Color du cadre : Or · Color temperature : 3000K
LCMIR-CHIC-RO-4040-GD-3CCT-TS	Dimension : 40X40 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-CHIC-RO-4040-GD-60K	Dimension : 40X40 · Color du cadre : Or · Color temperature : 6000K
LCMIR-CHIC-RO-4040-GD-RGBW	Dimension : 40X40 · Color du cadre : Or · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED FRAMED ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-GHO-RO





DIMENSIONS: 40 × 40 IN × 1.6 IN

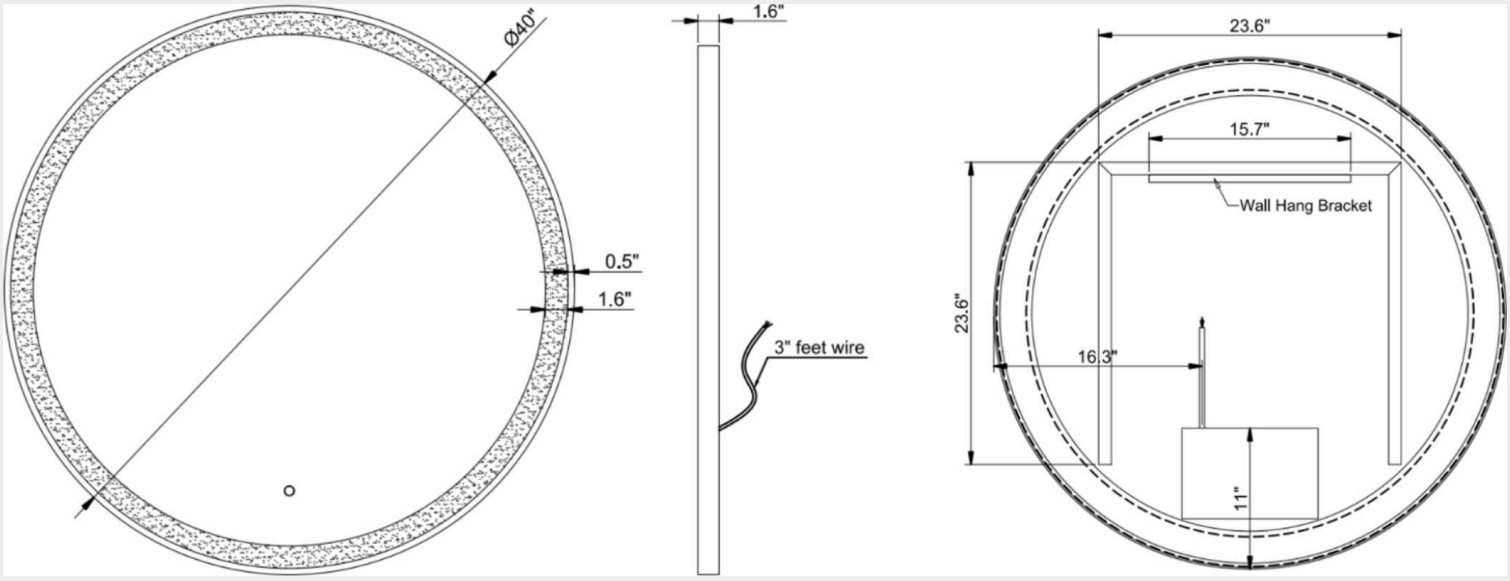


LED FRAMED ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-GHO-RO





DIMENSIONS: 40 × 40 IN × 1.6 IN

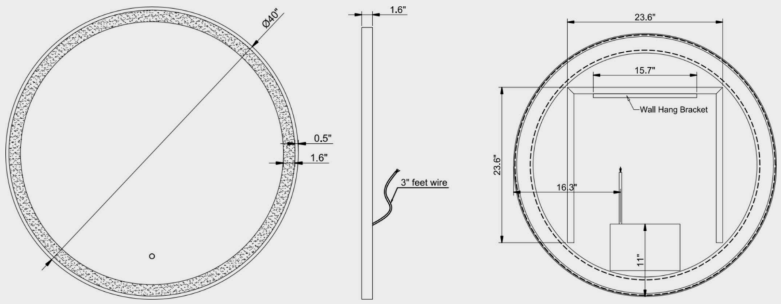

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 40 × 40 in. It delivers 5,760 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Frame: black. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 5,760 lm · CRI 90+
- 3 CCT by touch sensor
- Frame: black
- Frosted glass hidden when off
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	5,760 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	40 × 40 in
Depth	1.6 in
Weight	25 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED ROUND FRONT-LIT MIRROR 40×40 IN - 110 V

LCMIR-GHO-RO

ORDERING

Build the product code

1 Series	2 Size	3 Frame	4 Color
LCMIR-GHO-RO	**4040** 40 × 40 in	**BK** black	**3CCT-TS** 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-GHO-RO** – **4040** – **BK** – **3CCT-TS**

series | 40 × 40 in | black | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GHO-RO-4040-BK-3CCT-TS	Dimension : 40X40 · Color du cadre : Black · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED FRAMED ROUNDED SQUARE MIRROR 32×32 TO 40×40 IN

LCMIR-EPU





DIMENSIONS · 32 × 32 IN SIZE SHOWN

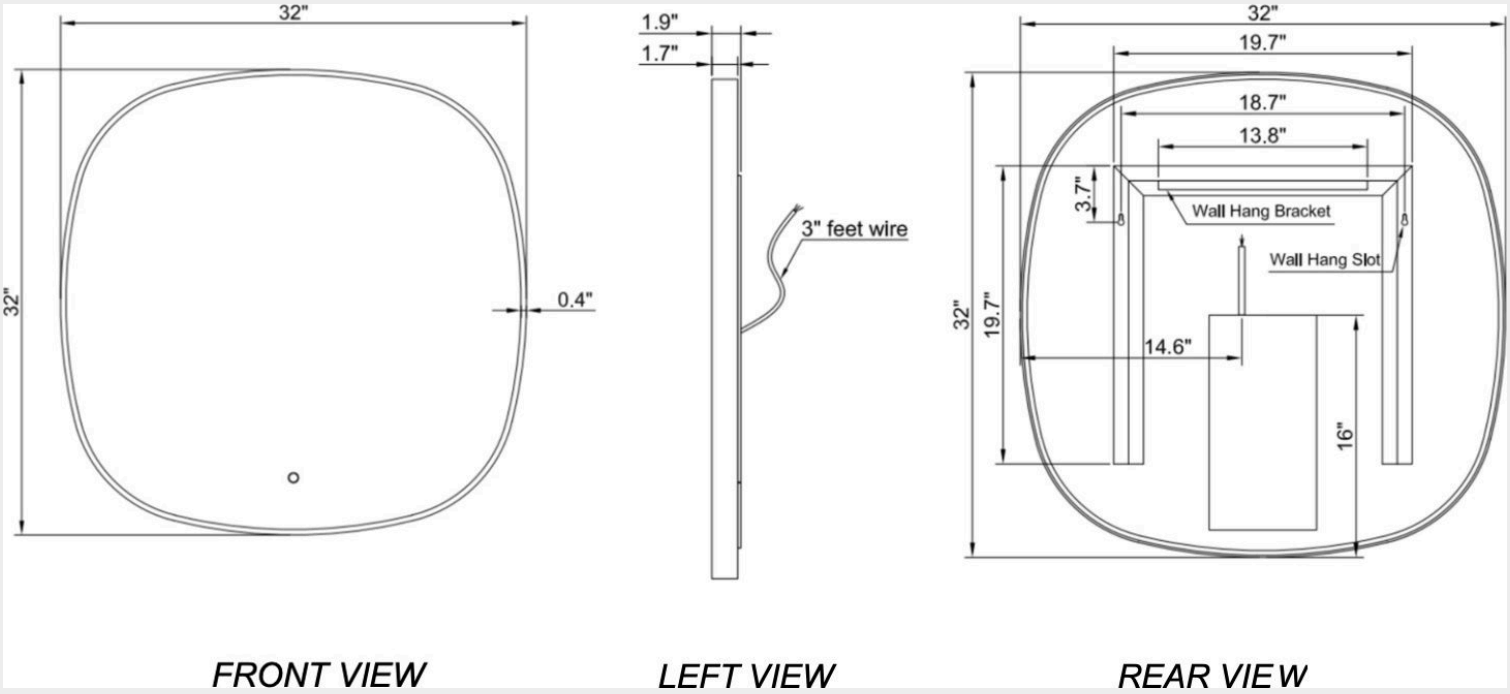


LED FRAMED ROUNDED SQUARE MIRROR 32×32 TO 40×40 IN

LCMIR-EPU





DIMENSIONS · 32 × 32 IN SIZE SHOWN

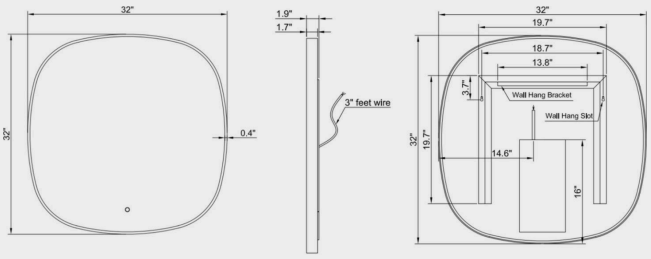

FRONT VIEW *LEFT VIEW* *REAR VIEW*

FRONT-LIT LED MIRROR, 2 SIZES

Front-lit LED mirror for the bathroom, available in 2 sizes, from 32 × 32 in to 40 × 40 in. It delivers 3,800 to 4,800 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Frame: black, gold. Hard-wired to the circuit.

FEATURES

- 3,800 to 4,800 lm · CRI 90+
- 3 CCT by touch sensor
- Frame: black · gold
- Inner frame trim lighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	27 to 33.8 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	3,800 to 4,800 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	32 × 32 · 40 × 40 in
Weight	20.5 to 30 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED ROUNDED SQUARE MIRROR 32×32 TO 40×40 IN

LCMIR-EPU

ORDERING

Build the product code

1 Series	2 Size	3 Frame	4 Color
LCMIR-EPU	**3232** 32 × 32 in **4040** 40 × 40 in	**BK** black **GD** gold	**3CCT-TS** 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-EPU** – **3232** – **BK** – **3CCT-TS**

series · 32 × 32 in · black · 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
32 × 32 in	**27 W**	**3,800 lm**	**20.5 lb**
40 × 40 in	**33.8 W**	**4,800 lm**	**30 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-EPU-3232-BK-3CCT-TS	Dimension : 32X32 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-EPU-3232-GD-3CCT-TS	Dimension : 32X32 · Color du cadre : Or · Color temperature : 3CCT selectable
LCMIR-EPU-4040-BK-3CCT-TS	Dimension : 40X40 · Color du cadre : Black · Color temperature : 3CCT selectable
LCMIR-EPU-4040-GD-3CCT-TS	Dimension : 40X40 · Color du cadre : Or · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED FRAMED, ROUNDED CORNERS MIRROR 24×36 TO 85×40 IN

LCMIR-LUNA





DIMENSIONS · 24 × 36 IN SIZE SHOWN

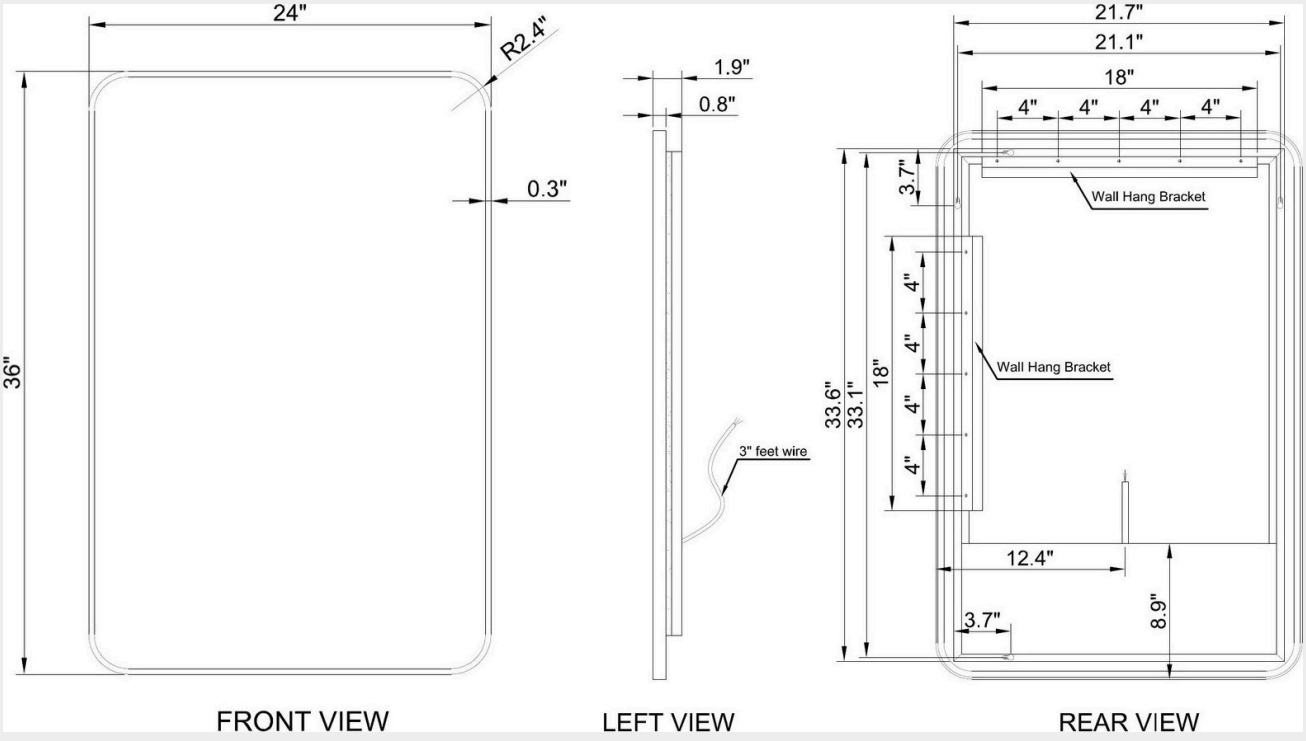


LED FRAMED, ROUNDED CORNERS MIRROR 24×36 TO 85×40 IN

LCMIR-LUNA





DIMENSIONS · 24 × 36 IN SIZE SHOWN

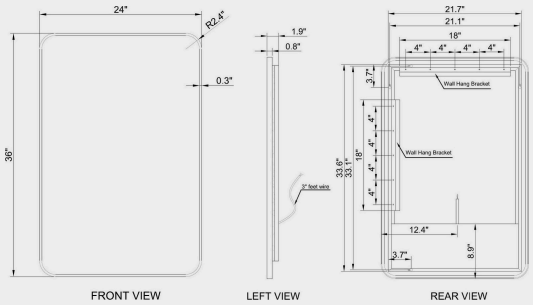

BACKLIT LED MIRROR, 5 SIZES, 2 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 5 sizes, from 24 × 36 in to 85 × 40 in. It delivers 4,550 to 10,850 lumens depending on size, with a CRI of 90+. Frame: black, gold, copper. Hard-wired to the circuit.

FEATURES

- 4,550 to 10,850 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: black · gold · copper
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	45 to 98 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	4,550 to 10,850 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 30 × 42 · 48 × 36 · 70 × 42 · 85 × 40 in
Weight	20 to 74 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRAMED, ROUNDED CORNERS MIRROR 24×36 TO 85×40 IN

LCMIR-LUNA

ORDERING

Build the product code

1 Series

LCMIR-LUNA

2 Size

2436 24 × 36 in
3042 30 × 42 in
4836 48 × 36 in
7042 70 × 42 in
8540 85 × 40 in

3 Frame

BK black
GD gold
CP copper

4 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-LUNA** – **2436** – **BK** – **60K**

series | 24 × 36 in | black | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	45 W	4,550 lm	20 lb
30 × 42 in	58 W	6,430 lm	30 lb
48 × 36 in	65 W	7,550 lm	40 lb
70 × 42 in	90 W	9,550 lm	66 lb
85 × 40 in	98 W	10,850 lm	74 lb

LED FRAMED, ROUNDED CORNERS MIRROR 24×36 TO 85×40 IN

LCMIR-LUNA

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-LUNA-2436-BK-30K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 3000K
LCMIR-LUNA-2436-BK-60K	Dimension : 24X36 · Color du cadre : Black · Color temperature : 6000K
LCMIR-LUNA-2436-CP-30K	Dimension : 24X36 · Color du cadre : Cuivre · Color temperature : 3000K
LCMIR-LUNA-2436-CP-60K	Dimension : 24X36 · Color du cadre : Cuivre · Color temperature : 6000K
LCMIR-LUNA-2436-GD-30K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 3000K
LCMIR-LUNA-2436-GD-60K	Dimension : 24X36 · Color du cadre : Or · Color temperature : 6000K
LCMIR-LUNA-3042-BK-30K	Dimension : 30X42 · Color du cadre : Black · Color temperature : 3000K
LCMIR-LUNA-3042-BK-60K	Dimension : 30X42 · Color du cadre : Black · Color temperature : 6000K
LCMIR-LUNA-3042-CP-30K	Dimension : 30X42 · Color du cadre : Cuivre · Color temperature : 3000K
LCMIR-LUNA-3042-CP-60K	Dimension : 30X42 · Color du cadre : Cuivre · Color temperature : 6000K
LCMIR-LUNA-3042-GD-30K	Dimension : 30X42 · Color du cadre : Or · Color temperature : 3000K
LCMIR-LUNA-3042-GD-60K	Dimension : 30X42 · Color du cadre : Or · Color temperature : 6000K
LCMIR-LUNA-4836-BK-30K	Dimension : 48X36 · Color du cadre : Black · Color temperature : 3000K
LCMIR-LUNA-4836-BK-60K	Dimension : 48X36 · Color du cadre : Black · Color temperature : 6000K
LCMIR-LUNA-4836-CP-30K	Dimension : 48X36 · Color du cadre : Cuivre · Color temperature : 3000K
LCMIR-LUNA-4836-CP-60K	Dimension : 48X36 · Color du cadre : Cuivre · Color temperature : 6000K
LCMIR-LUNA-4836-GD-30K	Dimension : 48X36 · Color du cadre : Or · Color temperature : 3000K
LCMIR-LUNA-4836-GD-60K	Dimension : 48X36 · Color du cadre : Or · Color temperature : 6000K
LCMIR-LUNA-7042-BK-30K	Dimension : 70X42 · Color du cadre : Black · Color temperature : 3000K
LCMIR-LUNA-7042-BK-60K	Dimension : 70X42 · Color du cadre : Black · Color temperature : 6000K
LCMIR-LUNA-7042-CP-30K	Dimension : 70X42 · Color du cadre : Cuivre · Color temperature : 3000K
LCMIR-LUNA-7042-CP-60K	Dimension : 70X42 · Color du cadre : Cuivre · Color temperature : 6000K
LCMIR-LUNA-7042-GD-30K	Dimension : 70X42 · Color du cadre : Or · Color temperature : 3000K
LCMIR-LUNA-7042-GD-60K	Dimension : 70X42 · Color du cadre : Or · Color temperature : 6000K
LCMIR-LUNA-8540-BK-30K	Dimension : 85X40 · Color du cadre : Black · Color temperature : 3000K
LCMIR-LUNA-8540-BK-60K	Dimension : 85X40 · Color du cadre : Black · Color temperature : 6000K
LCMIR-LUNA-8540-CP-30K	Dimension : 85X40 · Color du cadre : Cuivre · Color temperature : 3000K
LCMIR-LUNA-8540-CP-60K	Dimension : 85X40 · Color du cadre : Cuivre · Color temperature : 6000K
LCMIR-LUNA-8540-GD-30K	Dimension : 85X40 · Color du cadre : Or · Color temperature : 3000K
LCMIR-LUNA-8540-GD-60K	Dimension : 85X40 · Color du cadre : Or · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED FRONT-LIT AND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-DECA





DIMENSIONS · 24 × 24 IN SIZE SHOWN

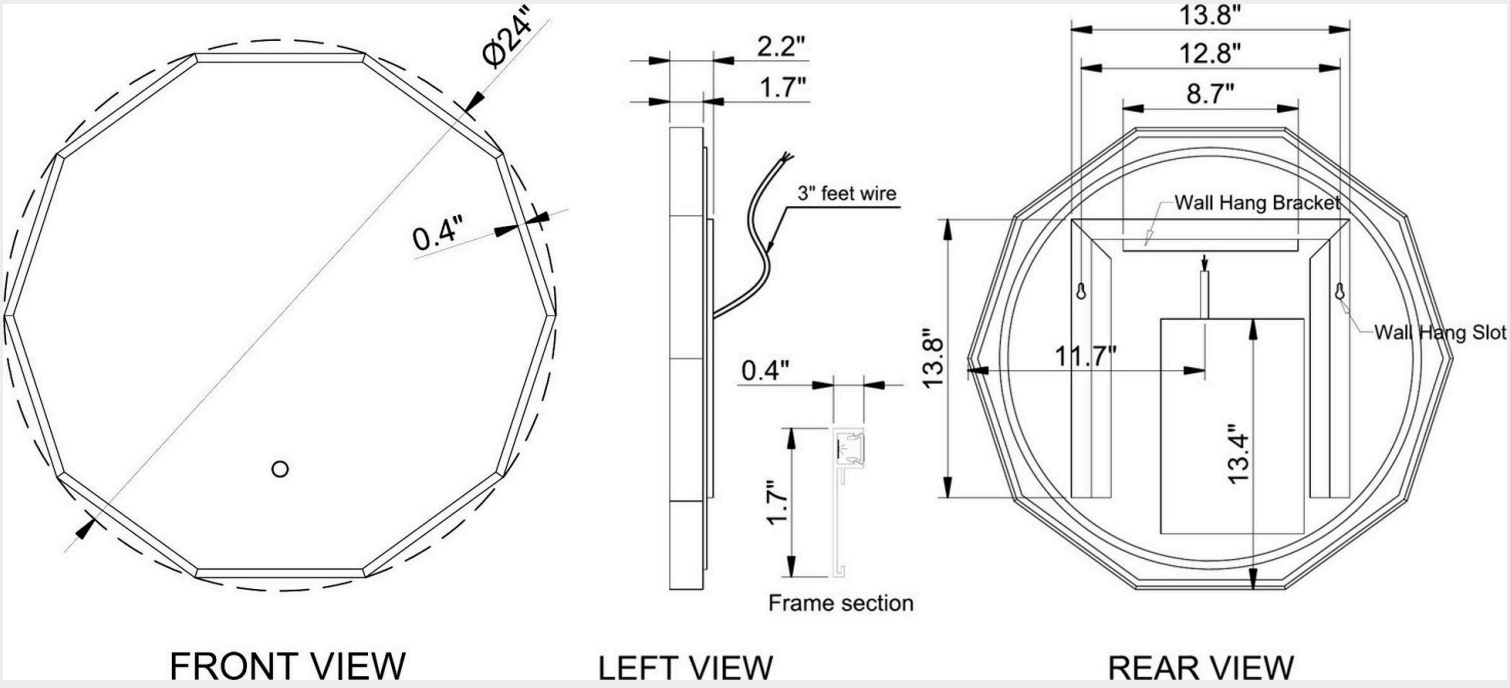


LED FRONT-LIT AND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-DECA





DIMENSIONS · 24 × 24 IN SIZE SHOWN

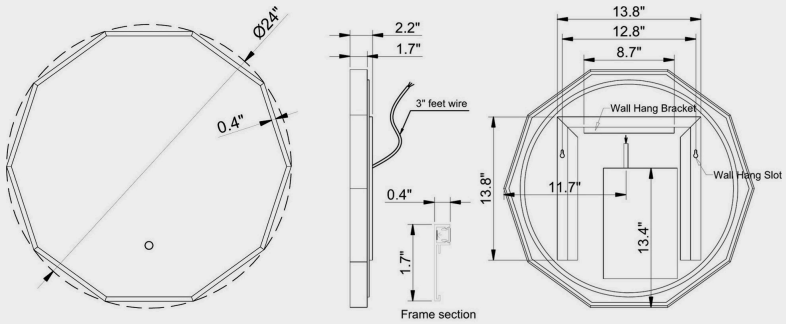

FRONT VIEW LEFT VIEW REAR VIEW

FRONT-LIT AND BACKLIT LED MIRROR, 3 SIZES

Front-lit and backlit LED mirror for the bathroom, available in 3 sizes, from 24 × 24 in to 40 × 40 in. It delivers 3,100 to 5,100 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 3,100 to 5,100 lm · CRI 90+
- 3 CCT by touch sensor
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 to 60 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	3,100 to 5,100 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 24 · 32 × 32 · 40 × 40 in
Weight	12 to 28 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRONT-LIT AND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-DECA

ORDERING

Build the product code

1 Series

LCMIR-DECA

2 Size

2424 24 × 24 in
3232 32 × 32 in
4040 40 × 40 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-DECA** – **2424** – **BK** – **3CCT-TS**

series | 24 × 24 in | black | 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 24 in	**35 W**	**3,100 lm**	**12 lb**
32 × 32 in	**50 W**	**4,100 lm**	**20 lb**
40 × 40 in	**60 W**	**5,100 lm**	**28 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-DECA-2424-BK-3CCT-TS	Dimension : 24X24 · Color temperature : 3CCT selectable
LCMIR-DECA-3232-BK-3CCT-TS	Dimension : 32X32 · Color temperature : 3CCT selectable
LCMIR-DECA-4040-BK-3CCT-TS	Dimension : 40X40 · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED FRONT-LIT AND BACKLIT MIRROR 48×35 TO 60×35 IN

LCMIR-CLASS





DIMENSIONS · 48 × 35 IN SIZE SHOWN

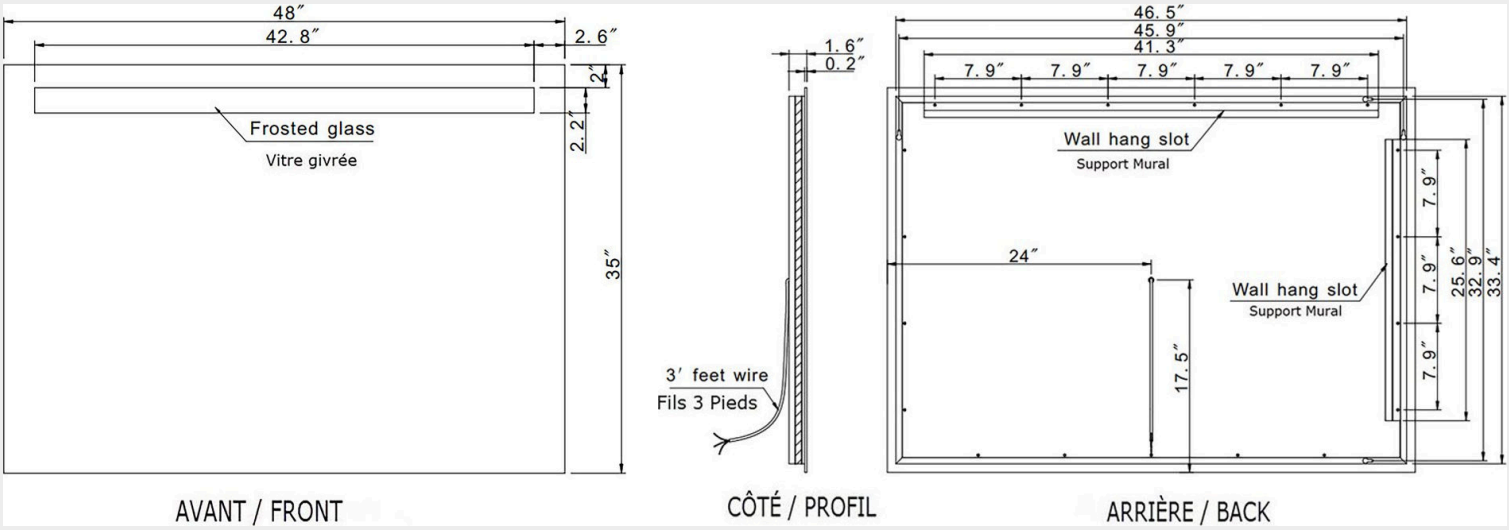


LED FRONT-LIT AND BACKLIT MIRROR 48×35 TO 60×35 IN

LCMIR-CLASS





DIMENSIONS · 48 × 35 IN SIZE SHOWN

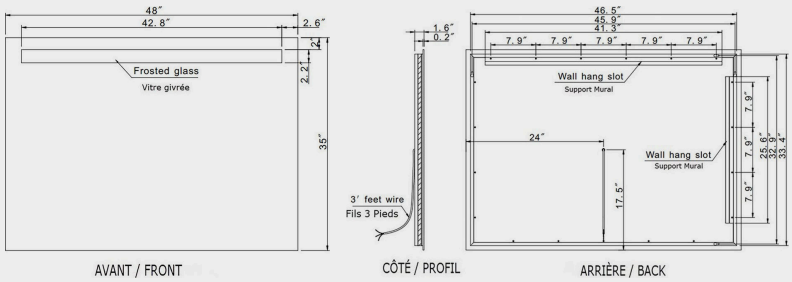

FRONT-LIT AND BACKLIT LED MIRROR, 2 SIZES, 2 LIGHT COLORS

Front-lit and backlit LED mirror for the bathroom, available in 2 sizes, from 48 × 35 in to 60 × 35 in. It delivers 7,620 to 9,180 lumens depending on size, with a CRI of 90+. Frame: silver. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 7,620 to 9,180 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frame: silver
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	65 to 76 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	7,620 to 9,180 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 35 · 60 × 35 in
Depth	1.6 in
Weight	49 to 59 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FRONT-LIT AND BACKLIT MIRROR 48×35 TO 60×35 IN

LCMIR-CLASS

ORDERING

Build the product code

1 Series	2 Size	3 Frame	4 Color
LCMIR-CLASS	**4835** 48 × 35 in **6035** 60 × 35 in		**30K** 3000K warm white **60K** 6000K cool white

EXAMPLE **LCMIR-CLASS** – **4835** – **60K**

series | 48 × 35 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 35 in	**65 W**	**7,620 / 7,830 lm**	**49 lb**
60 × 35 in	**76 W**	**8,930 / 9,180 lm**	**59 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-CLASS-4835-30K	Dimension : 48X35 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-CLASS-4835-60K	Dimension : 48X35 · Color du cadre : Silver · Color temperature : 6000K
LCMIR-CLASS-6035-30K	Dimension : 60X35 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-CLASS-6035-60K	Dimension : 60X35 · Color du cadre : Silver · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED FROSTED BACKLIT MIRROR 20×28 TO 40×36 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 24 × 32 IN SIZE SHOWN

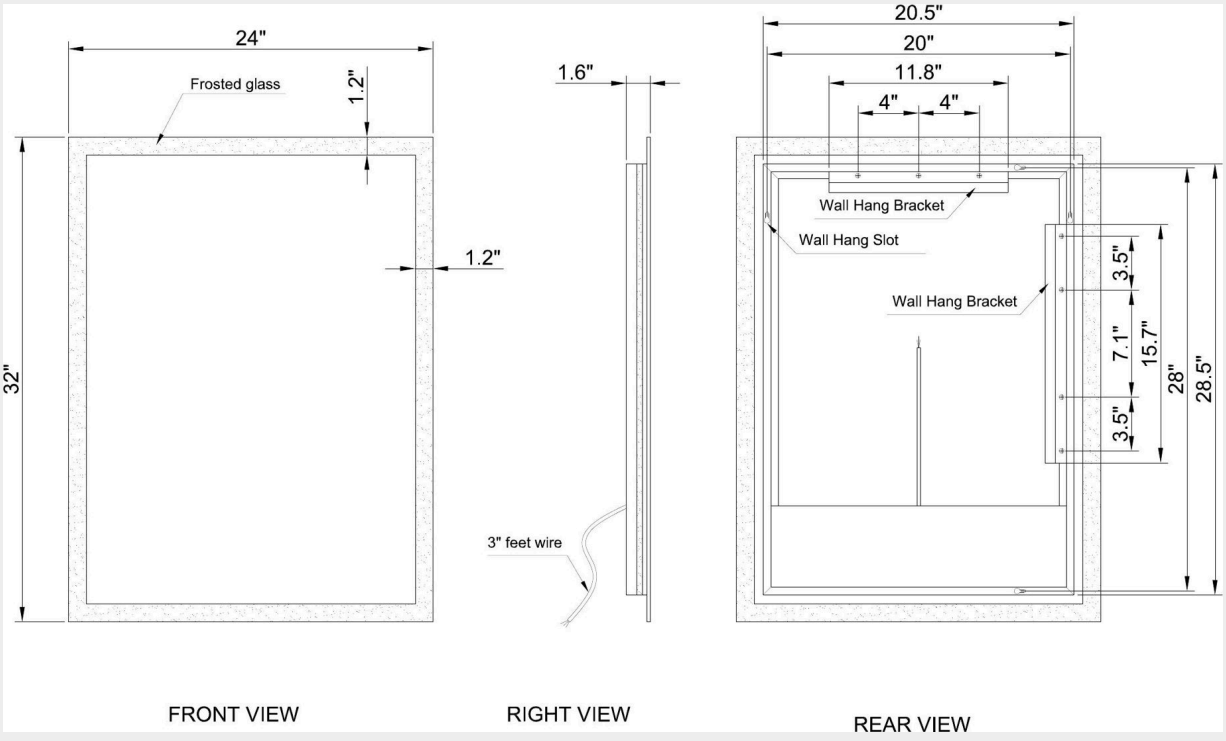


LED FROSTED BACKLIT MIRROR 20×28 TO 40×36 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 24 × 32 IN SIZE SHOWN



BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 5 SIZES, 5 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 5 sizes, from 20 × 28 in to 40 × 36 in. It delivers 3,919 to 6,430 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 10 other sizes (separate sheet): 42 × 42, 48 × 28, 48 × 36, 55 × 28, 60 × 36, 70 × 32, 70 × 45, 79 × 30, 85 × 40, 100 × 45 in, 15 sizes in all.

FEATURES

- 3,919 to 6,430 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	32 to 58 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,919 to 6,430 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 28 · 24 × 32 · 36 × 36 · 40 × 24 · 40 × 36 in
Depth	1.6 in
Weight	14 to 29 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED BACKLIT MIRROR 20×28 TO 40×36 IN - 110 V

LCMIR-REC-FB

ORDERING

Build the product code

1 Series

LCMIR-REC-FB

2 Size

2028 20 × 28 in
2432 24 × 32 in
3636 36 × 36 in
4024 40 × 24 in
4036 40 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-REC-FB** – **2432** – **60K**
series | 24 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 28 in	**32 W**	**3,919 lm**	**14 lb**
24 × 32 in	**38 W**	**4,594 lm**	**17 lb**
36 × 36 in	**54 W**	**5,943 lm**	**28 lb**
40 × 24 in	**50 W**	**5,455 lm**	**22 lb**
40 × 36 in	**58 W**	**6,410 / 6,430 lm**	**29 lb**

LED FROSTED BACKLIT MIRROR 20×28 TO 40×36 IN - 110 V

LCMIR-REC-FB

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-REC-FB-2028-30K	Size: 20 × 28 in · 3000K
LCMIR-REC-FB-2028-3CCT-TS	Size: 20 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-2028-60K	Size: 20 × 28 in · 6000K
LCMIR-REC-FB-2028-CCT	Size: 20 × 28 in · Tunable white, remote (2700K-6000K)
LCMIR-REC-FB-2028-RGBW	Size: 20 × 28 in · Multicolor RGB
LCMIR-REC-FB-2432-30K	Size: 24 × 32 in · 3000K
LCMIR-REC-FB-2432-3CCT-TS	Size: 24 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-2432-60K	Size: 24 × 32 in · 6000K
LCMIR-REC-FB-2432-RGBW	Size: 24 × 32 in · Multicolor RGB
LCMIR-REC-FB-3636-30K	Size: 36 × 36 in · 3000K
LCMIR-REC-FB-3636-3CCT-TS	Size: 36 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-3636-60K	Size: 36 × 36 in · 6000K
LCMIR-REC-FB-3636-RGBW	Size: 36 × 36 in · Multicolor RGB
LCMIR-REC-FB-4024-30K	Size: 40 × 24 in · 3000K
LCMIR-REC-FB-4024-3CCT-TS	Size: 40 × 24 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-4024-60K	Size: 40 × 24 in · 6000K
LCMIR-REC-FB-4024-RGBW	Size: 40 × 24 in · Multicolor RGB
LCMIR-REC-FB-4036-30K	Size: 40 × 36 in · 3000K
LCMIR-REC-FB-4036-3CCT-TS	Size: 40 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-4036-60K	Size: 40 × 36 in · 6000K
LCMIR-REC-FB-4036-RGBW	Size: 40 × 36 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FROSTED BACKLIT MIRROR 24×36 TO 85×40 IN - 110 V

LCMIR-HAR-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

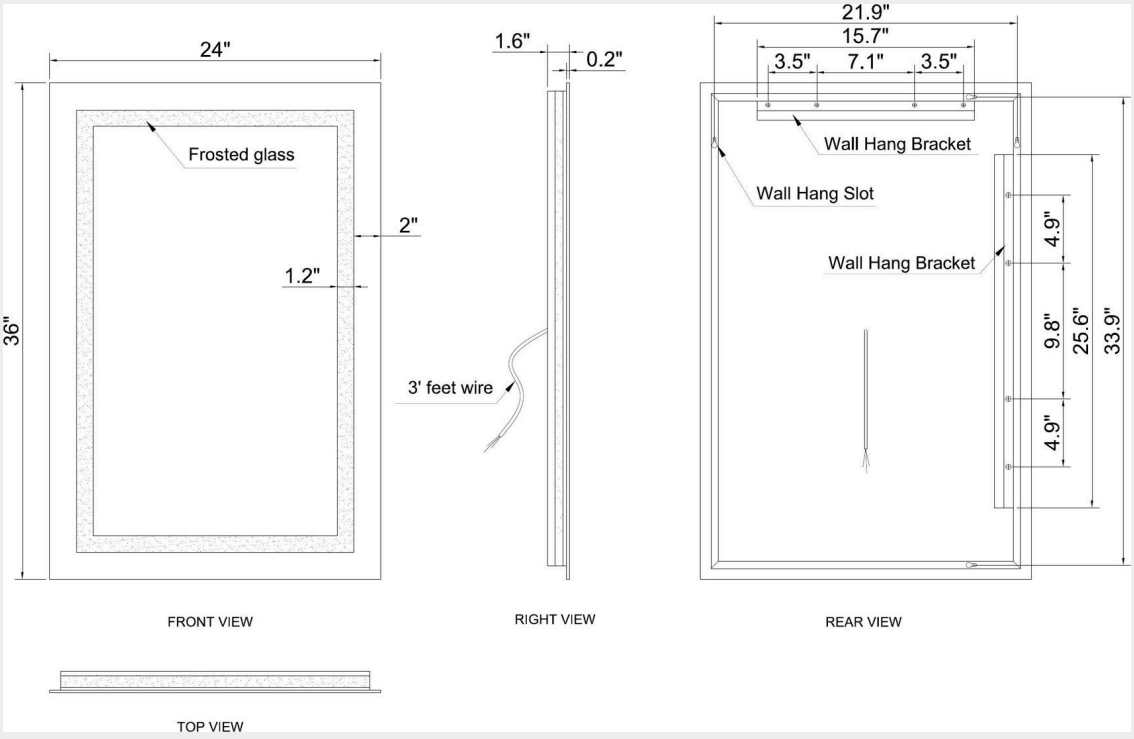


LED FROSTED BACKLIT MIRROR 24×36 TO 85×40 IN - 110 V

LCMIR-HAR-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

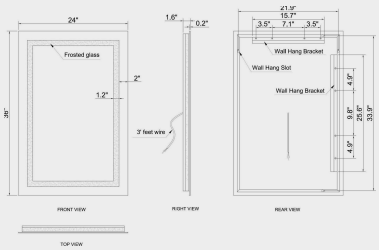

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 7 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 7 sizes, from 24 × 36 in to 85 × 40 in. It delivers 10,890 to 23,720 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 10,890 to 23,720 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Front-lit and backlit
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	88 to 205 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	10,890 to 23,720 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 30 × 42 · 36 × 36 · 40 × 35 · 48 × 35 · 70 × 32 · 85 × 40 in
Depth	1.6 in
Weight	25 to 89 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED BACKLIT MIRROR 24×36 TO 85×40 IN - 110 V

LCMIR-HAR-BL

ORDERING

Build the product code

1 Series

LCMIR-HAR-BL

2 Size

2436 24 × 36 in
3042 30 × 42 in
3636 36 × 36 in
4035 40 × 35 in
4835 48 × 35 in
7032 70 × 32 in
8540 85 × 40 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR-BL** – **2436** – **60K**
series | 24 × 36 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	88 W	10,890 / 10,910 lm	25 lb
30 × 42 in	107 W	11,880 lm	34 lb
36 × 36 in	107 W	11,860 / 11,880 lm	34 lb
40 × 35 in	112 W	11,080 lm	38 lb
48 × 35 in	124 W	14,530 / 14,940 lm	46 lb
70 × 32 in	160 W	17,920 / 17,960 lm	46 lb
85 × 40 in	205 W	23,720 / 23,720 lm	89 lb

LED FROSTED BACKLIT MIRROR 24×36 TO 85×40 IN - 110 V

LCMIR-HAR-BL

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-BL-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-HAR-BL-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-HAR-BL-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-HAR-BL-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW
LCMIR-HAR-BL-3042-30K	Dimension : 30X42 · Color temperature : 3000K
LCMIR-HAR-BL-3042-3CCT-TS	Dimension : 30X42 · Color temperature : 3CCT selectable
LCMIR-HAR-BL-3042-60K	Dimension : 30X42 · Color temperature : 6000K
LCMIR-HAR-BL-3042-RGBW	Dimension : 30X42 · Color temperature : RGBW
LCMIR-HAR-BL-3636-30K	Dimension : 36X36 · Color temperature : 3000K
LCMIR-HAR-BL-3636-3CCT-TS	Dimension : 36X36 · Color temperature : 3CCT selectable
LCMIR-HAR-BL-3636-60K	Dimension : 36X36 · Color temperature : 6000K
LCMIR-HAR-BL-3636-RGBW	Dimension : 36X36 · Color temperature : RGBW
LCMIR-HAR-BL-4035-30K	Dimension : 40X35 · Color temperature : 3000K
LCMIR-HAR-BL-4035-3CCT-TS	Dimension : 40X35 · Color temperature : 3CCT selectable
LCMIR-HAR-BL-4035-60K	Dimension : 40X35 · Color temperature : 6000K
LCMIR-HAR-BL-4035-RGBW	Dimension : 40X35 · Color temperature : RGBW
LCMIR-HAR-BL-4835-30K	Dimension : 48X35 · Color temperature : 3000K
LCMIR-HAR-BL-4835-3CCT-TS	Dimension : 48X35 · Color temperature : 3CCT selectable
LCMIR-HAR-BL-4835-60K	Dimension : 48X35 · Color temperature : 6000K
LCMIR-HAR-BL-4835-RGBW	Dimension : 48X35 · Color temperature : RGBW
LCMIR-HAR-BL-7032-30K	Dimension : 70X32 · Color temperature : 3000K
LCMIR-HAR-BL-7032-60K	Dimension : 70X32 · Color temperature : 6000K
LCMIR-HAR-BL-8540-30K	Dimension : 85X40 · Color temperature : 3000K
LCMIR-HAR-BL-8540-60K	Dimension : 85X40 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED FROSTED BACKLIT MIRROR 42×42 TO 60×36 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 42 × 42 IN SIZE SHOWN

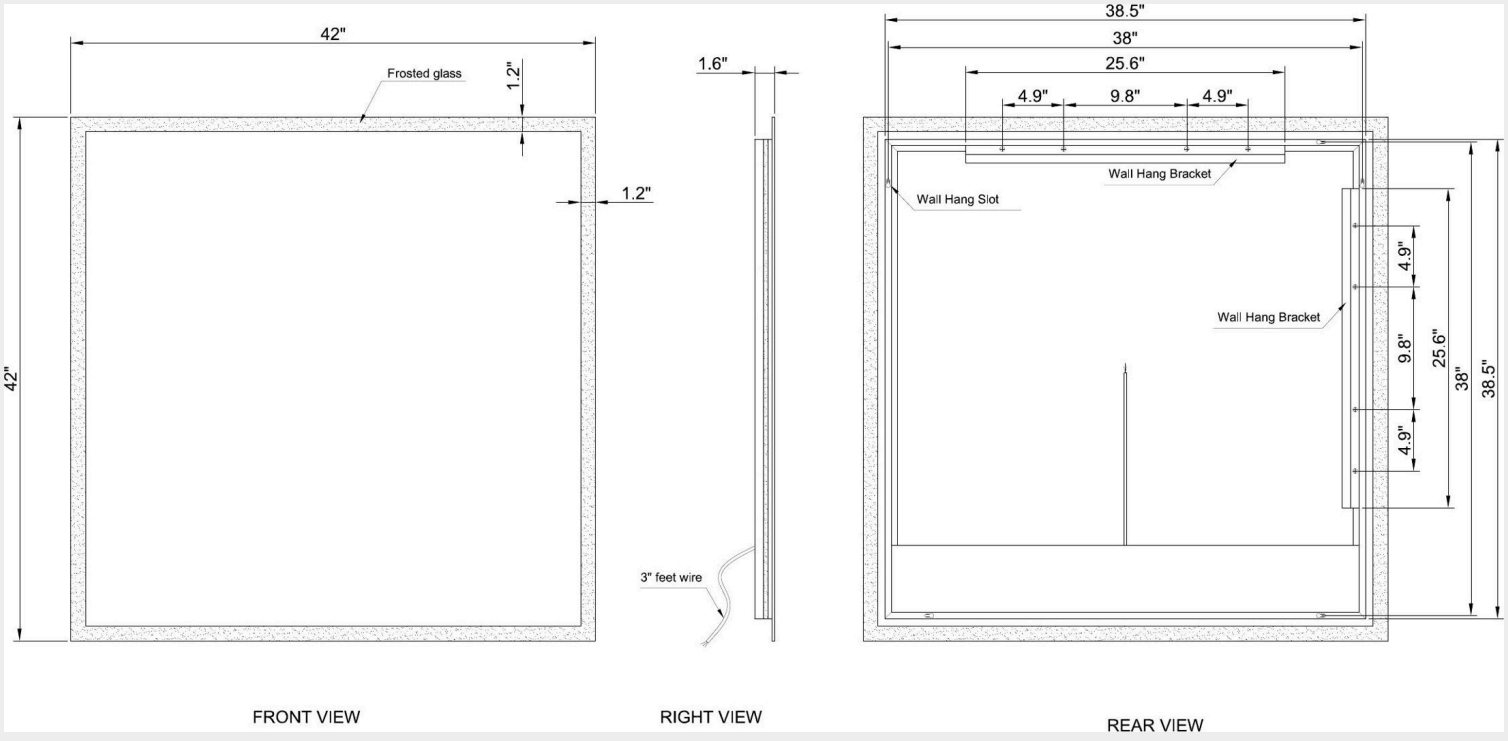


LED FROSTED BACKLIT MIRROR 42×42 TO 60×36 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 42 × 42 IN SIZE SHOWN

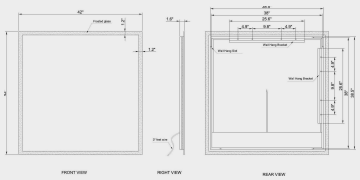

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 5 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 5 sizes, from 42 × 42 in to 60 × 36 in. It delivers 6,410 to 8,512 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 10 other sizes (separate sheet): 20 × 28, 24 × 32, 36 × 36, 40 × 24, 40 × 36, 70 × 32, 70 × 45, 79 × 30, 85 × 40, 100 × 45 in, 15 sizes in all.

FEATURES

- 6,410 to 8,512 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	58 to 70 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	6,410 to 8,512 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	42 × 42 · 48 × 28 · 48 × 36 · 55 × 28 · 60 × 36 in
Depth	1.6 in
Weight	30 to 71 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED BACKLIT MIRROR 42×42 TO 60×36 IN - 110 V

LCMIR-REC-FB

ORDERING

Build the product code

1 Series

LCMIR-REC-FB

2 Size

4242 42 × 42 in
4828 48 × 28 in
4836 48 × 36 in
5528 55 × 28 in
6036 60 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-REC-FB** – **4242** – **30K**
series | 42 × 42 in | 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
42 × 42 in	65 W	7,838 lm	38 lb
48 × 28 in	58 W	6,410 / 6,430 lm	30 lb
48 × 36 in	65 W	7,838 lm	37 lb
55 × 28 in	65 W	7,474 lm	33 lb
60 × 36 in	70 W	8,512 lm	71 lb

LED FROSTED BACKLIT MIRROR 42×42 TO 60×36 IN - 110 V

LCMIR-REC-FB

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-REC-FB-4242-30K	Size: 42 × 42 in · 3000K
LCMIR-REC-FB-4242-3CCT-TS	Size: 42 × 42 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-4242-60K	Size: 42 × 42 in · 6000K
LCMIR-REC-FB-4242-RGBW	Size: 42 × 42 in · Multicolor RGB
LCMIR-REC-FB-4828-30K	Size: 48 × 28 in · 3000K
LCMIR-REC-FB-4828-3CCT-TS	Size: 48 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-4828-60K	Size: 48 × 28 in · 6000K
LCMIR-REC-FB-4828-RGBW	Size: 48 × 28 in · Multicolor RGB
LCMIR-REC-FB-4836-30K	Size: 48 × 36 in · 3000K
LCMIR-REC-FB-4836-3CCT-TS	Size: 48 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-4836-60K	Size: 48 × 36 in · 6000K
LCMIR-REC-FB-4836-RGBW	Size: 48 × 36 in · Multicolor RGB
LCMIR-REC-FB-5528-30K	Size: 55 × 28 in · 3000K
LCMIR-REC-FB-5528-3CCT-TS	Size: 55 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-5528-60K	Size: 55 × 28 in · 6000K
LCMIR-REC-FB-5528-RGBW	Size: 55 × 28 in · Multicolor RGB
LCMIR-REC-FB-6036-30K	Size: 60 × 36 in · 3000K
LCMIR-REC-FB-6036-3CCT-TS	Size: 60 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-6036-60K	Size: 60 × 36 in · 6000K
LCMIR-REC-FB-6036-RGBW	Size: 60 × 36 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED FROSTED BACKLIT MIRROR 70×32 TO 100×45 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 70 × 32 IN SIZE SHOWN

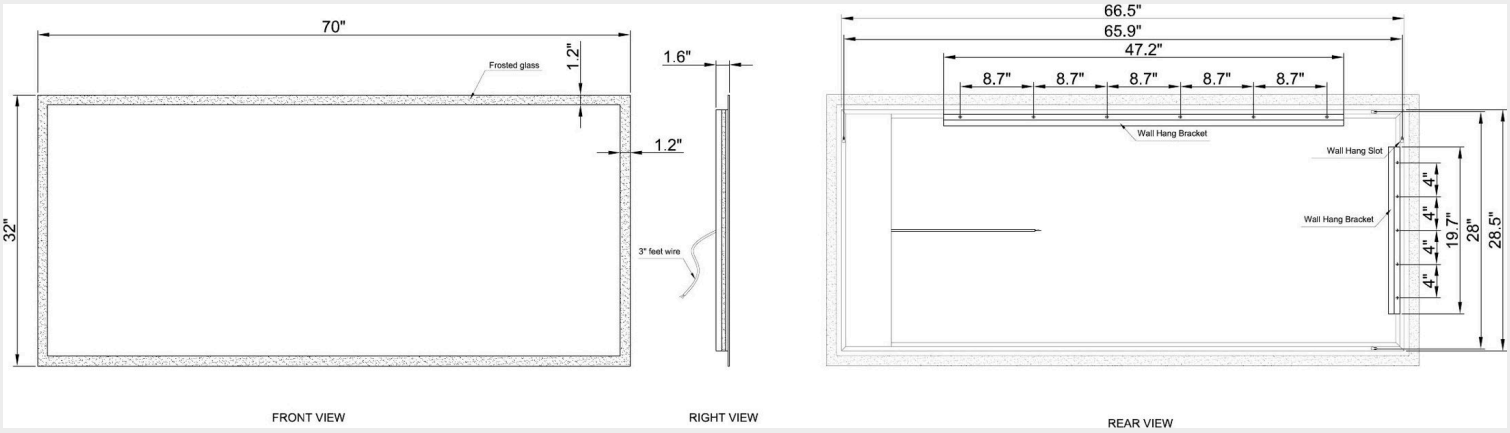


LED FROSTED BACKLIT MIRROR 70×32 TO 100×45 IN - 110 V

LCMIR-REC-FB





DIMENSIONS · 70 × 32 IN SIZE SHOWN

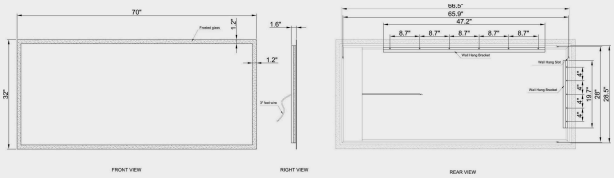

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 5 SIZES, 5 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 5 sizes, from 70 × 32 in to 100 × 45 in. It delivers 9,188 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 10 other sizes (separate sheet): 20 × 28, 24 × 32, 36 × 36, 40 × 24, 40 × 36, 42 × 42, 48 × 28, 48 × 36, 55 × 28, 60 × 36 in, 15 sizes in all.

FEATURES

- 9,188 to 12,860 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	76 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	9,188 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	70 × 32 · 70 × 45 · 79 × 30 · 85 × 40 · 100 × 45 in
Depth	1.6 in
Weight	48 to 90 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED BACKLIT MIRROR 70×32 TO 100×45 IN - 110 V

LCMIR-REC-FB

ORDERING

Build the product code

1 Series

LCMIR-REC-FB

2 Size

7032 70 × 32 in
7045 70 × 45 in
7930 79 × 30 in
8540 85 × 40 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-REC-FB** – **10045** – **30K**

series | 100 × 45 in | 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
70 × 32 in	**76 W**	**9,188 lm**	**48 lb**
70 × 45 in	**90 W**	**9,948 lm**	**65 lb**
79 × 30 in	**90 W**	**9,948 lm**	**50 lb**
85 × 40 in	**98 W**	**10,890 / 10,910 lm**	**72 lb**
100 × 45 in	**116 W**	**12,830 / 12,860 lm**	**90 lb**

LED FROSTED BACKLIT MIRROR 70×32 TO 100×45 IN - 110 V

LCMIR-REC-FB

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-REC-FB-10045-30K	Size: 100 × 45 in · 3000K
LCMIR-REC-FB-10045-60K	Size: 100 × 45 in · 6000K
LCMIR-REC-FB-10045-CCT	Size: 100 × 45 in · Tunable white, remote (2700K-6000K)
LCMIR-REC-FB-10045-RGBW	Size: 100 × 45 in · Multicolor RGB
LCMIR-REC-FB-7032-30K	Size: 70 × 32 in · 3000K
LCMIR-REC-FB-7032-3CCT-TS	Size: 70 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-7032-60K	Size: 70 × 32 in · 6000K
LCMIR-REC-FB-7032-RGBW	Size: 70 × 32 in · Multicolor RGB
LCMIR-REC-FB-7045-30K	Size: 70 × 45 in · 3000K
LCMIR-REC-FB-7045-3CCT-TS	Size: 70 × 45 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-7045-60K	Size: 70 × 45 in · 6000K
LCMIR-REC-FB-7045-RGBW	Size: 70 × 45 in · Multicolor RGB
LCMIR-REC-FB-7930-30K	Size: 79 × 30 in · 3000K
LCMIR-REC-FB-7930-3CCT-TS	Size: 79 × 30 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-REC-FB-7930-60K	Size: 79 × 30 in · 6000K
LCMIR-REC-FB-7930-RGBW	Size: 79 × 30 in · Multicolor RGB
LCMIR-REC-FB-8540-30K	Size: 85 × 40 in · 3000K
LCMIR-REC-FB-8540-60K	Size: 85 × 40 in · 6000K
LCMIR-REC-FB-8540-CCT	Size: 85 × 40 in · Tunable white, remote (2700K-6000K)
LCMIR-REC-FB-8540-RGBW	Size: 85 × 40 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FROSTED BAND BACKLIT MIRROR 40×35 TO 100×45 IN

LCMIR-PAR-BL





DIMENSIONS · 40 × 35 IN SIZE SHOWN

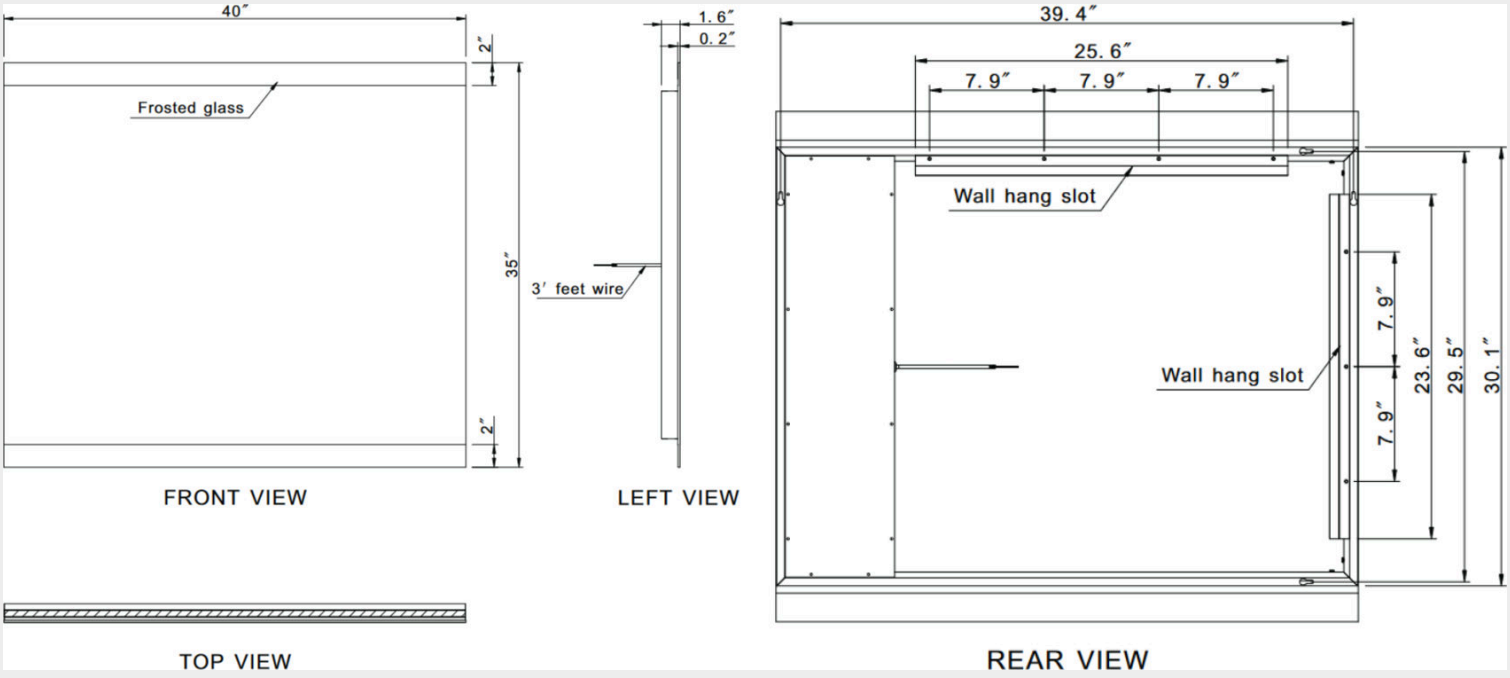


LED FROSTED BAND BACKLIT MIRROR 40×35 TO 100×45 IN

LCMIR-PAR-BL





DIMENSIONS · 40 × 35 IN SIZE SHOWN

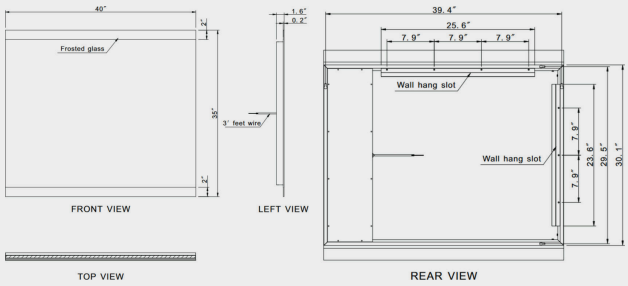

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 4 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 4 sizes, from 40 × 35 in to 100 × 45 in. It delivers 4,140 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,140 to 12,860 lm · CRI 90+
- 3000K · 6000K · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	4,140 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	40 × 35 · 80 × 35 · 96 × 28 · 100 × 45 in
Depth	1.6 in
Weight	32 to 90 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED BAND BACKLIT MIRROR 40×35 TO 100×45 IN

LCMIR-PAR-BL

ORDERING

Build the product code

1 Series

LCMIR-PAR-BL

2 Size

4035 40 × 35 in
8035 80 × 35 in
9628 96 × 28 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-PAR-BL** – **4035** – **60K**
series · 40 × 35 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
40 × 35 in	35 W	4,140 / 4,250 lm	32 lb
80 × 35 in	65 W	7,620 / 7,830 lm	62 lb
96 × 28 in	76 W	8,930 / 9,180 lm	60 lb
100 × 45 in	116 W	12,860 lm	90 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-PAR-BL-10045-30K	Dimension : 100X45 · Color temperature : 3000K
LCMIR-PAR-BL-10045-60K	Dimension : 100X45 · Color temperature : 6000K
LCMIR-PAR-BL-10045-CCT	Dimension : 100X45 · Color temperature : CCT ajustable
LCMIR-PAR-BL-10045-RGBW	Dimension : 100X45 · Color temperature : RGBW
LCMIR-PAR-BL-4035-30K	Dimension : 40X35 · Color temperature : 3000K
LCMIR-PAR-BL-4035-60K	Dimension : 40X35 · Color temperature : 6000K
LCMIR-PAR-BL-8035-30K	Dimension : 80X35 · Color temperature : 3000K
LCMIR-PAR-BL-8035-60K	Dimension : 80X35 · Color temperature : 6000K
LCMIR-PAR-BL-8035-CCT	Dimension : 80X35 · Color temperature : CCT ajustable
LCMIR-PAR-BL-8035-RGBW	Dimension : 80X35 · Color temperature : RGBW
LCMIR-PAR-BL-9628-30K	Dimension : 96X28 · Color temperature : 3000K
LCMIR-PAR-BL-9628-60K	Dimension : 96X28 · Color temperature : 6000K
LCMIR-PAR-BL-9628-CCT	Dimension : 96X28 · Color temperature : CCT ajustable
LCMIR-PAR-BL-9628-RGBW	Dimension : 96X28 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FROSTED OVAL BACKLIT MIRROR 20×28 TO 30×48 IN

LCMIR-OVAL-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

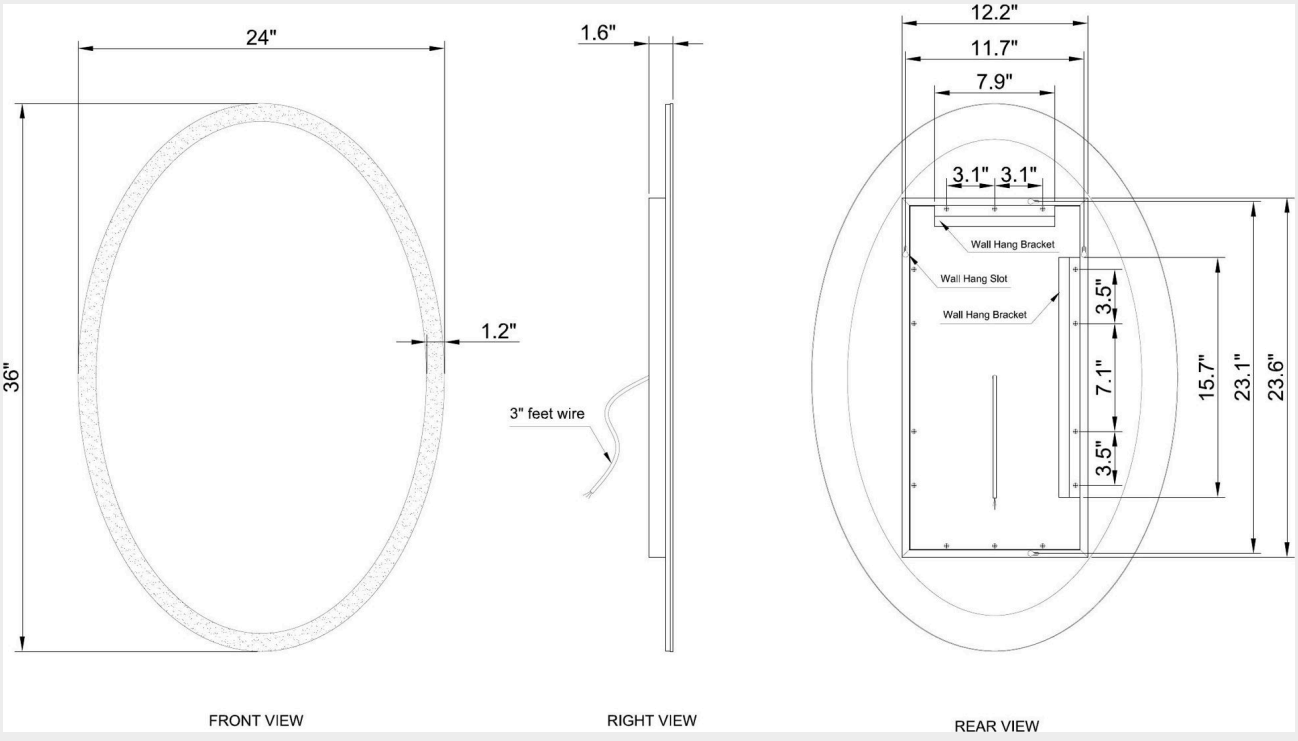


LED FROSTED OVAL BACKLIT MIRROR 20×28 TO 30×48 IN

LCMIR-OVAL-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

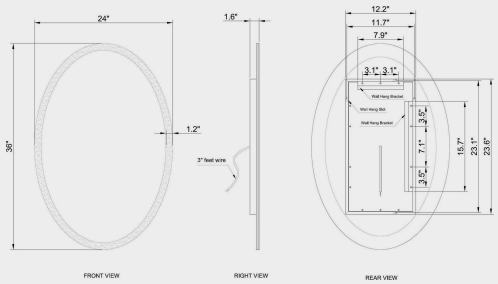

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 3 SIZES, 5 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 3 sizes, from 20 × 28 in to 30 × 48 in. It delivers 3,100 to 5,450 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,100 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 49 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,100 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 28 · 24 × 36 · 30 × 48 in
Depth	1.6 in
Weight	12 to 29 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED OVAL BACKLIT MIRROR 20×28 TO 30×48 IN

LCMIR-OVAL-BL

ORDERING

Build the product code

1 Series

LCMIR-OVAL-BL

2 Size

2028 20 × 28 in
2436 24 × 36 in
3048 30 × 48 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-OVAL-BL** – **2436** – **60K**
series — 24 × 36 in — 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 28 in	**30 W**	**3,100 / 3,190 lm**	**12 lb**
24 × 36 in	**35 W**	**4,140 / 4,250 lm**	**18 lb**
30 × 48 in	**49 W**	**5,440 / 5,450 lm**	**29 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-OVAL-BL-2028-30K	Dimension : 20X28 · Color temperature : 3000K
LCMIR-OVAL-BL-2028-60K	Dimension : 20X28 · Color temperature : 6000K
LCMIR-OVAL-BL-2028-CCT	Dimension : 20X28 · Color temperature : CCT ajustable
LCMIR-OVAL-BL-2028-RGBW	Dimension : 20X28 · Color temperature : RGBW
LCMIR-OVAL-BL-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-OVAL-BL-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-OVAL-BL-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-OVAL-BL-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW
LCMIR-OVAL-BL-3048-30K	Dimension : 30X48 · Color temperature : 3000K
LCMIR-OVAL-BL-3048-3CCT-TS	Dimension : 30X48 · Color temperature : 3CCT selectable
LCMIR-OVAL-BL-3048-60K	Dimension : 30X48 · Color temperature : 6000K
LCMIR-OVAL-BL-3048-CCT	Dimension : 30X48 · Color temperature : CCT ajustable
LCMIR-OVAL-BL-3048-RGBW	Dimension : 30X48 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED FROSTED ROUND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-ROND-BL





DIMENSIONS · 32 × 32 IN SIZE SHOWN

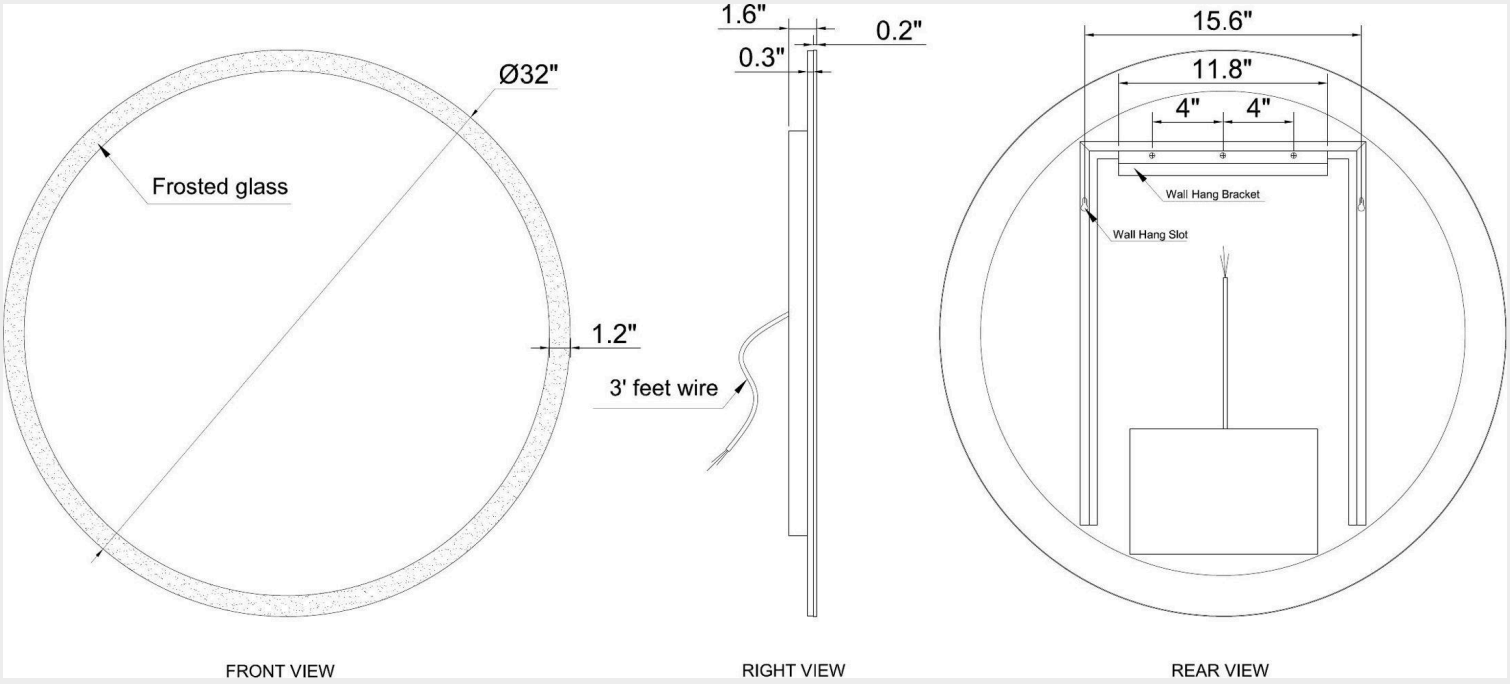


LED FROSTED ROUND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-ROND-BL





DIMENSIONS · 32 × 32 IN SIZE SHOWN

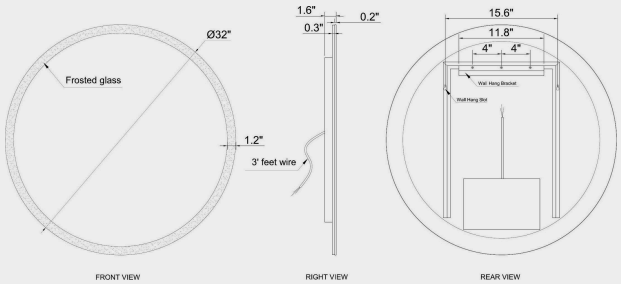

BACKLIT LED MIRROR WITH A FROSTED GLASS BAND, 3 SIZES, 4 LIGHT COLORS

Backlit LED mirror with a frosted glass band for the bathroom, available in 3 sizes, from 24 × 24 in to 40 × 40 in. It delivers 3,100 to 5,450 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,100 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 50 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	3,100 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 24 · 32 × 32 · 40 × 40 in
Depth	1.6 in
Weight	12 to 29 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED FROSTED ROUND BACKLIT MIRROR 24×24 TO 40×40 IN

LCMIR-ROND-BL

ORDERING

Build the product code

1 Series

LCMIR-ROND-BL

2 Size

2424 24 × 24 in
3232 32 × 32 in
4040 40 × 40 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ROND-BL** – **3232** – **60K**
series | 32 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 24 in	30 W	3,100 / 3,190 lm	12 lb
32 × 32 in	35 W	4,140 / 4,250 lm	20 lb
40 × 40 in	50 W	5,440 / 5,450 lm	29 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ROND-BL-2424-30K	Dimension : 24X24 · Color temperature : 3000K
LCMIR-ROND-BL-2424-3CCT-TS	Dimension : 24X24 · Color temperature : 3CCT selectable
LCMIR-ROND-BL-2424-60K	Dimension : 24X24 · Color temperature : 6000K
LCMIR-ROND-BL-2424-RGBW	Dimension : 24X24 · Color temperature : RGBW
LCMIR-ROND-BL-3232-30K	Dimension : 32X32 · Color temperature : 3000K
LCMIR-ROND-BL-3232-3CCT-TS	Dimension : 32X32 · Color temperature : 3CCT selectable
LCMIR-ROND-BL-3232-60K	Dimension : 32X32 · Color temperature : 6000K
LCMIR-ROND-BL-3232-RGBW	Dimension : 32X32 · Color temperature : RGBW
LCMIR-ROND-BL-4040-30K	Dimension : 40X40 · Color temperature : 3000K
LCMIR-ROND-BL-4040-3CCT-TS	Dimension : 40X40 · Color temperature : 3CCT selectable
LCMIR-ROND-BL-4040-60K	Dimension : 40X40 · Color temperature : 6000K
LCMIR-ROND-BL-4040-RGBW	Dimension : 40X40 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED GEOMETRIC FRONT-LIT MIRROR 40×40 IN 56 W - 110 V

LCMIR-ECLI





DIMENSIONS: 40 × 40 IN

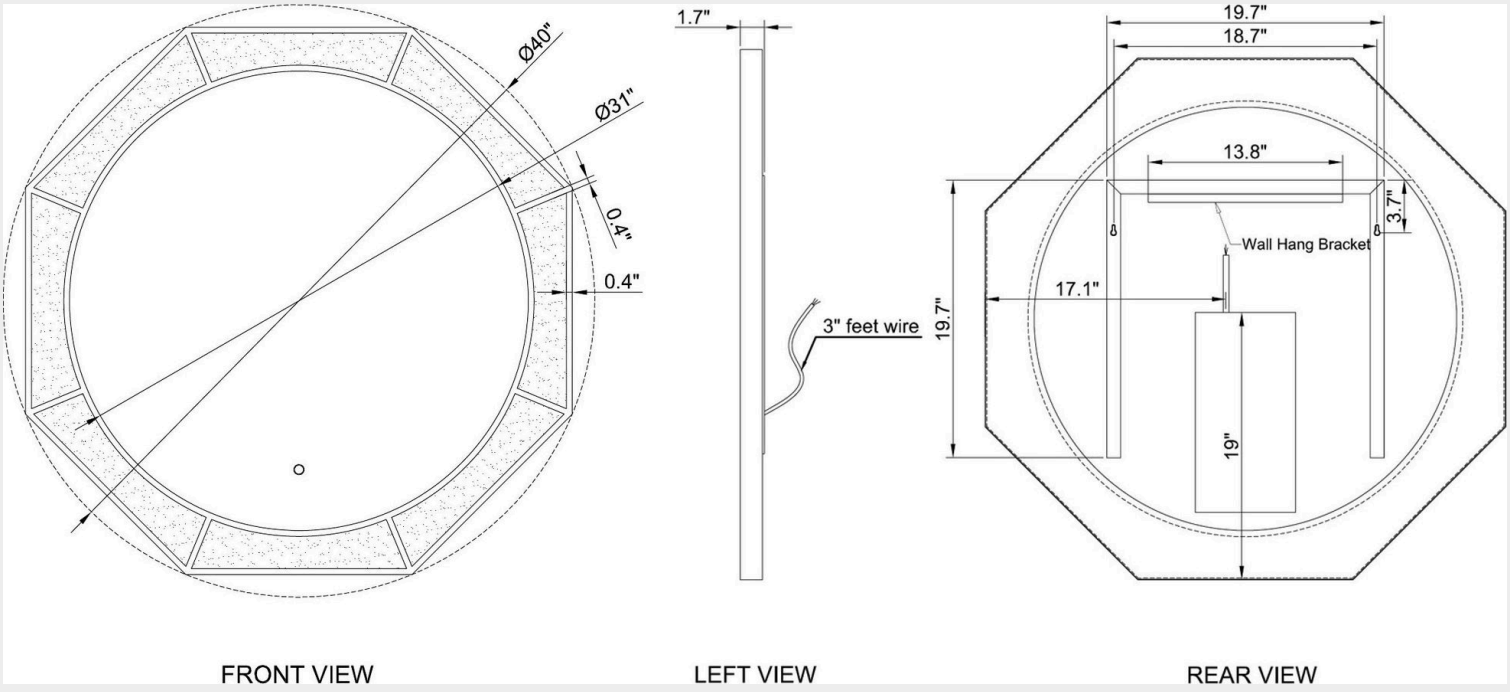


LED GEOMETRIC FRONT-LIT MIRROR 40×40 IN 56 W - 110 V

LCMIR-ECLI





DIMENSIONS: 40 × 40 IN

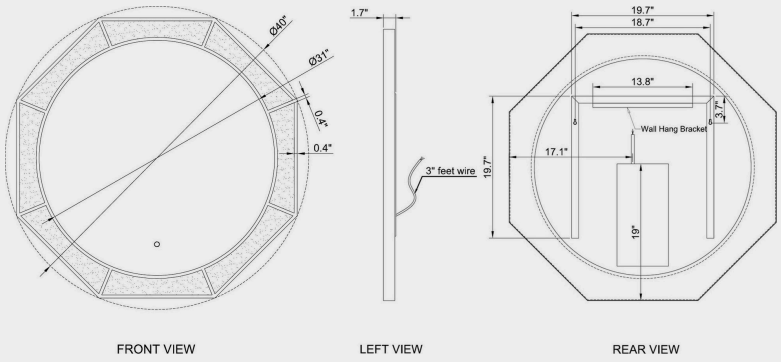

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 40 × 40 in. It delivers 5,376 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 5,376 lm · CRI 90+
- 3 CCT by touch sensor
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	56 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	5,376 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	40 × 40 in
Weight	25 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED GEOMETRIC FRONT-LIT MIRROR 40×40 IN 56 W - 110 V

LCMIR-ECLI

ORDERING

Build the product code

1 Series
`LCMIR-ECLI`

2 Size
`4040` 40 × 40 in

3 Color
`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-ECLI` – `4040` – `3CCT-TS`
series · 40 × 40 in · 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-ECLI-4040-3CCT-TS`	Dimension : 40X40 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 40 × 40 in: 56 W, 5 376 lm, 25 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED GOLD-FRAMED FRONT-LIT MIRROR 28×40 IN 50 W - 110 V

LCMIR-GHO





DIMENSIONS: 28 × 40 IN × 2 5/16 IN

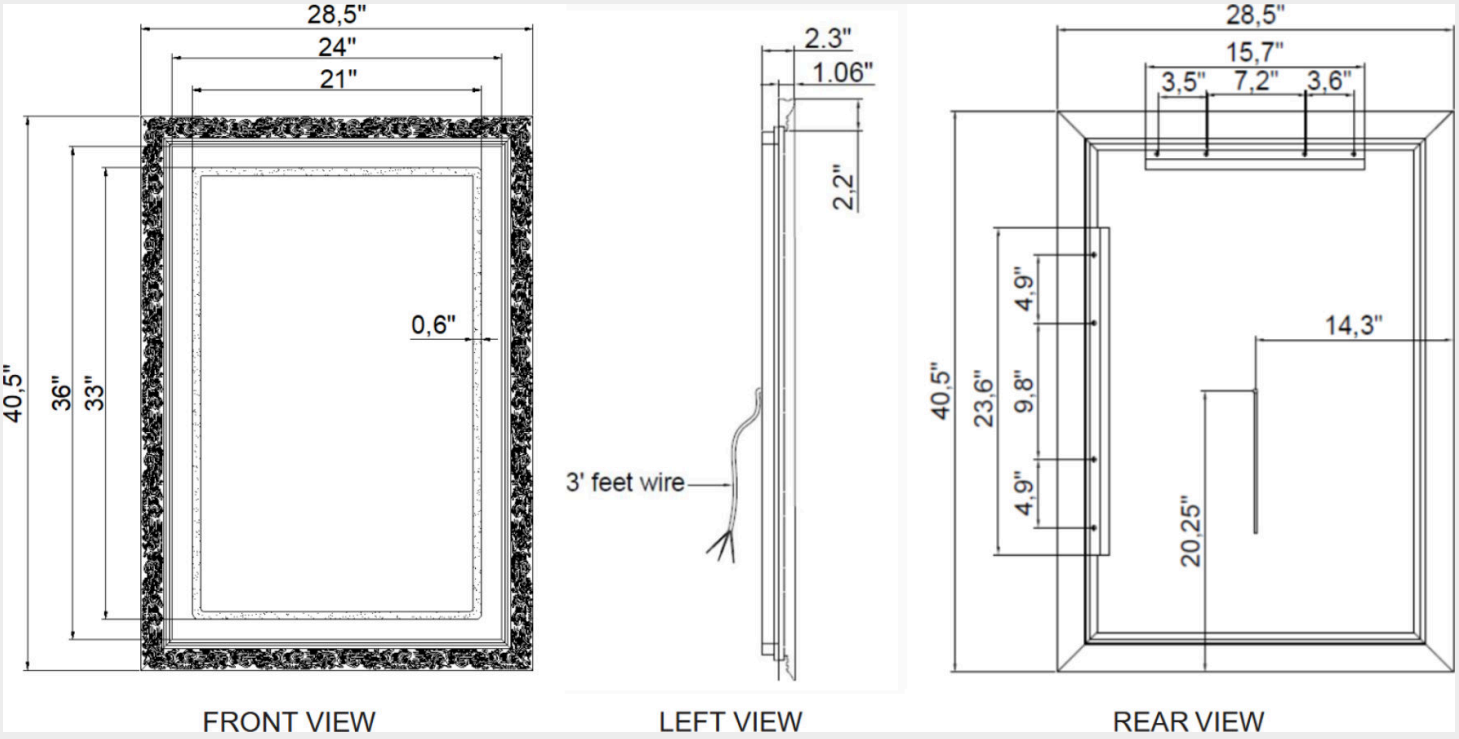


LED GOLD-FRAMED FRONT-LIT MIRROR 28×40 IN 50 W - 110 V

LCMIR-GHO





DIMENSIONS: 28 × 40 IN × 2 5/16 IN

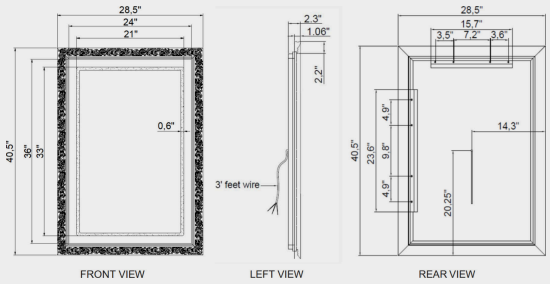

FRONT-LIT LED MIRROR, 1 SIZE, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 28 × 40 in. It delivers 4,320 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,320 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Frosted glass hidden when off
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	50 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	4,320 lm
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	28 × 40 in
Depth	2 5/16 in
Weight	30 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED GOLD-FRAMED FRONT-LIT MIRROR 28×40 IN 50 W - 110 V

LCMIR-GHO

ORDERING

Build the product code

1 Series

`LCMIR-GHO`

2 Size

`2840` 28 × 40 in

3 Color

`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE **`LCMIR-GHO`** – **`2840`** – **`60K`**
series · 28 × 40 in · 6000K cool white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-GHO-2840-30K`	Dimension : 28X40 · Color temperature : 3000K
`LCMIR-GHO-2840-60K`	Dimension : 28X40 · Color temperature : 6000K


Per size (3000K / 6000K lumens when they differ) — 28 × 40 in: 50 W, 4 320 lm, 30 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.

LED MIRROR 70×28 TO 85×40 IN

LCMIR-HOL-D



DIMENSIONS · 70 × 28 IN SIZE SHOWN

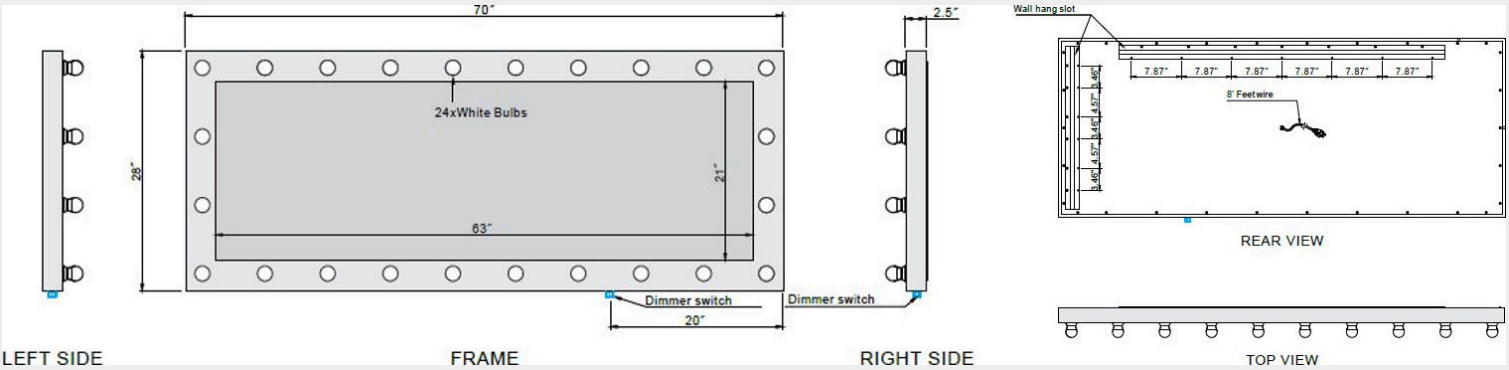

LED MIRROR 70×28 TO 85×40 IN

LCMIR-HOL-D




LED VANITY MIRROR WITH BULBS, 2 SIZES, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 2 sizes, from 70 × 28 in to 85 × 40 in. It delivers 6,480 to 8,320 lumens depending on size, with a CRI of 90+. Frame: black, pink, white. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 6,480 to 8,320 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- Frame: black · pink · white
- IP44 · cULus certified
- 5 year warranty

DIMENSIONS · 70 × 28 IN SIZE SHOWN

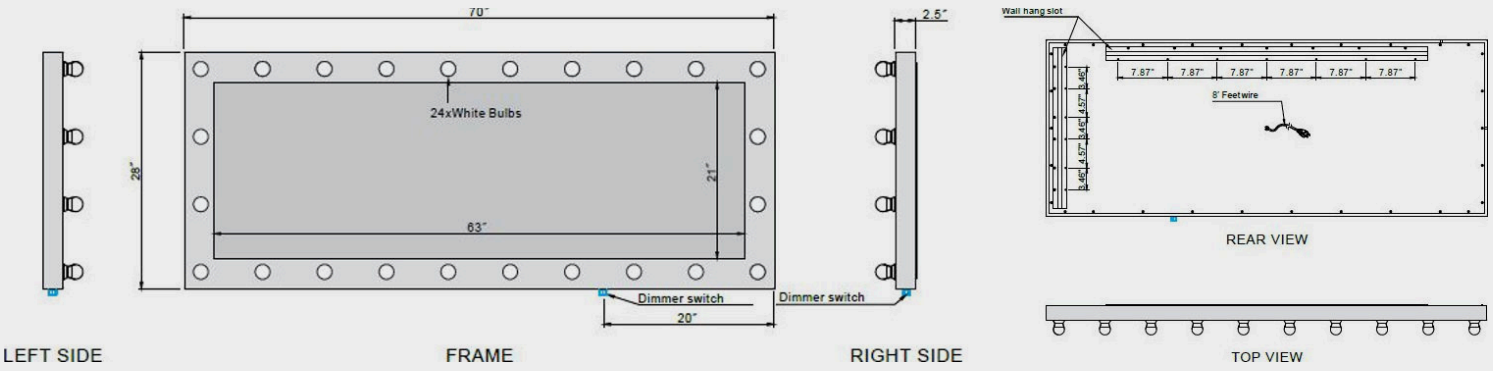

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	72 to 78 W depending on size
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	6,480 to 8,320 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	70 × 28 · 85 × 40 in
Depth	2.5 in
Weight	80 to 154 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED MIRROR 70×28 TO 85×40 IN

LCMIR-HOL-D

ORDERING

Build the product code

1 Code

LCMIR-HOL-D-7028-30K-BK
LCMIR-HOL-D-7028-30K-PK
LCMIR-HOL-D-7028-60K-BK
LCMIR-HOL-D-7028-60K-PK
LCMIR-HOL-D-8540-30K-BK
LCMIR-HOL-D-8540-30K-PK
LCMIR-HOL-D-8540-30K-WH
LCMIR-HOL-D-8540-60K-BK

EXAMPLE **LCMIR-HOL-D-7028-60K-BK**
example

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
70 × 28 in	**72 W**	**6,480 / 7,680 lm**	**80 lb**
85 × 40 in	**78 W**	**7,020 / 8,320 lm**	**154 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HOL-D-7028-30K-BK	Dimension : 70X28 · Color du cadre : Black · Color temperature : 3000K
LCMIR-HOL-D-7028-30K-PK	Dimension : 70X28 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-HOL-D-7028-60K-BK	Dimension : 70X28 · Color du cadre : Black · Color temperature : 6000K
LCMIR-HOL-D-7028-60K-PK	Dimension : 70X28 · Color du cadre : Rose · Color temperature : 6000K
LCMIR-HOL-D-8540-30K-BK	Dimension : 85X40 · Color du cadre : Black · Color temperature : 3000K
LCMIR-HOL-D-8540-30K-PK	Dimension : 85X40 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-HOL-D-8540-30K-WH	Dimension : 85X40 · Color du cadre : White · Color temperature : 3000K
LCMIR-HOL-D-8540-60K-BK	Dimension : 85X40 · Color du cadre : Black · Color temperature : 6000K
LCMIR-HOL-D-8540-60K-PK	Dimension : 85X40 · Color du cadre : Rose · Color temperature : 6000K
LCMIR-HOL-D-8540-60K-WH	Dimension : 85X40 · Color du cadre : White · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED MIRRORED MEDICINE CABINET 15×30 TO 72×30 IN - 110 V

LCMIR-GALA-C





DIMENSIONS · 24 × 32 IN SIZE SHOWN

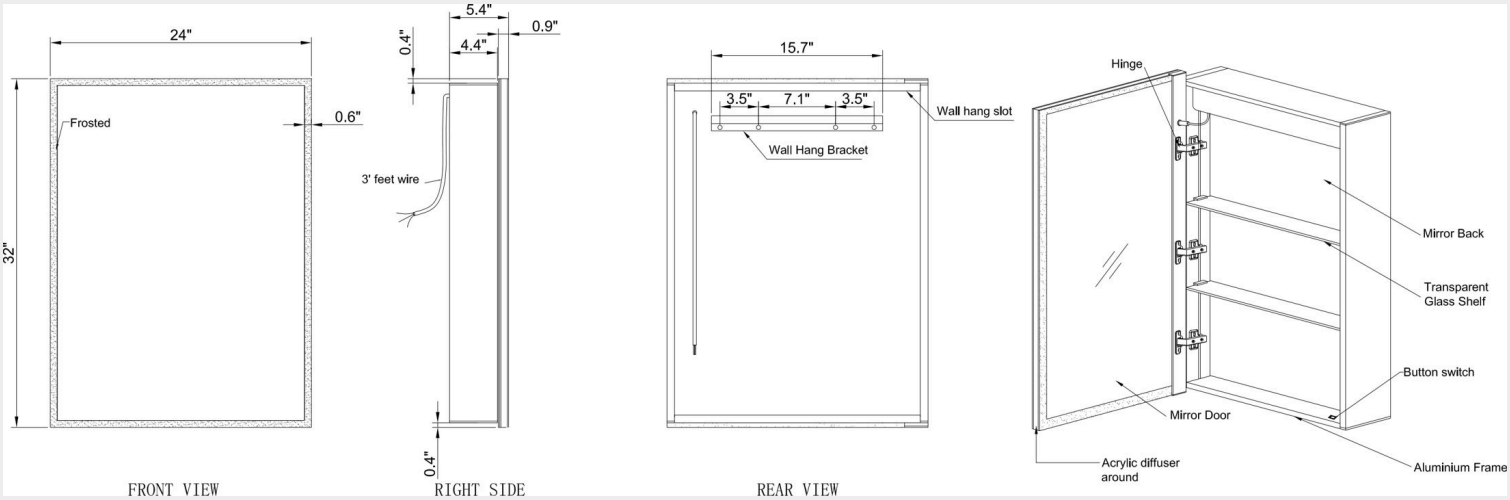


LED MIRRORED MEDICINE CABINET 15×30 TO 72×30 IN - 110 V

LCMIR-GALA-C





DIMENSIONS · 24 × 32 IN SIZE SHOWN

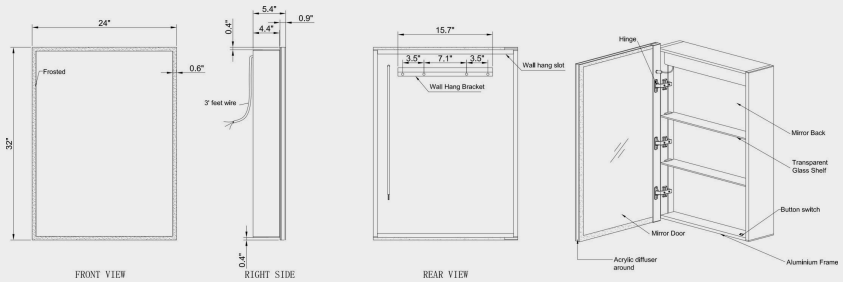

LIGHTED MIRRORED MEDICINE CABINET, 5 SIZES, 2 LIGHT COLORS

Lighted mirrored medicine cabinet for the bathroom, available in 5 sizes, from 15 × 30 in to 72 × 30 in. It delivers 3,810 to 14,910 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,810 to 14,910 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Lighting on the front and back of the doors
- Interior on/off switch
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 to 135 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	3,810 to 14,910 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	15 × 30 · 24 × 32 · 48 × 28 · 60 × 28 · 72 × 30 in
Depth	5.4 in
Weight	28 to 102 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED MIRRORED MEDICINE CABINET 15×30 TO 72×30 IN - 110 V

LCMIR-GALA-C

ORDERING

Build the product code

1 Series

LCMIR-GALA-C

2 Size

1530 15 × 30 in
2432 24 × 32 in
4828 48 × 28 in
6028 60 × 28 in
7230 72 × 30 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-GALA-C** – **2432** – **60K**
series | 24 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
15 × 30 in	35 W	3,810 / 3,910 lm	28 lb
24 × 32 in	45 W	4,960 / 4,970 lm	44 lb
48 × 28 in	76 W	8,930 / 9,180 lm	80 lb
60 × 28 in	110 W	12,420 / 12,760 lm	102 lb
72 × 30 in	135 W	14,890 / 14,910 lm	60 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GALA-C1530-30K	Dimension : 15X30 · Color temperature : 3000K
LCMIR-GALA-C1530-60K	Dimension : 15X30 · Color temperature : 6000K
LCMIR-GALA-C2432-30K	Dimension : 24X32 · Color temperature : 3000K
LCMIR-GALA-C2432-60K	Dimension : 24X32 · Color temperature : 6000K
LCMIR-GALA-C4828-30K	Dimension : 48X28 · Color temperature : 3000K
LCMIR-GALA-C4828-60K	Dimension : 48X28 · Color temperature : 6000K
LCMIR-GALA-C6028-30K	Dimension : 60X28 · Color temperature : 3000K
LCMIR-GALA-C6028-60K	Dimension : 60X28 · Color temperature : 6000K
LCMIR-GALA-C7230-30K	Dimension : 72X30 · Color temperature : 3000K
LCMIR-GALA-C7230-60K	Dimension : 72X30 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED MIRRORED MEDICINE CABINET 24×32 IN 35 W - 110 V

LCMIR-VER-C





DIMENSIONS: 24 × 32 IN × 5.1 IN

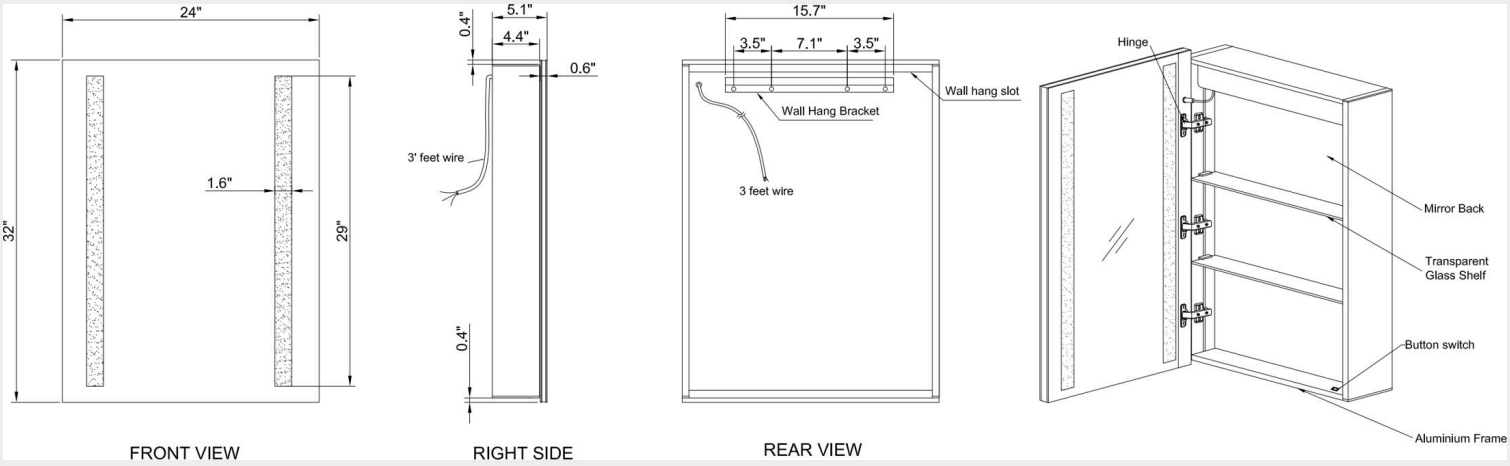


LED MIRRORED MEDICINE CABINET 24×32 IN 35 W - 110 V

LCMIR-VER-C





DIMENSIONS: 24 × 32 IN × 5.1 IN

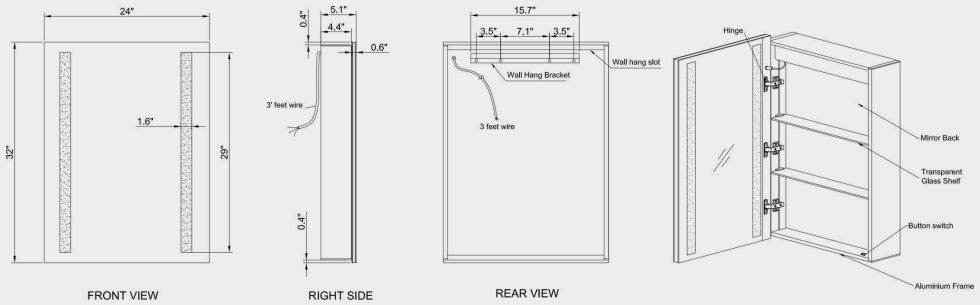

LIGHTED MIRRORED MEDICINE CABINET, 1 SIZE, 2 LIGHT COLORS

Lighted mirrored medicine cabinet for the bathroom, available in 24 × 32 in. It delivers 3,919 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit.

FEATURES

- 3,919 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Lighting on the front and back of the doors
- Interior on/off switch
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	3,919 lm
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	24 × 32 in
Depth	5.1 in
Weight	42 lb
Mounting	As shown only

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED MIRRORED MEDICINE CABINET 24×32 IN 35 W - 110 V

LCMIR-VER-C

ORDERING

Build the product code

1 Series

`LCMIR-VER-C`

2 Size

2432 24 × 32 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-VER-C** – **2432** – **30K**
series · 24 × 32 in · 3000K warm white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-VER-C2432-30K	Dimension : 24X32 · Color temperature : 3000K
LCMIR-VER-C2432-60K	Dimension : 24X32 · Color temperature : 6000K

Per size (3000K / 6000K lumens when they differ) — 24 × 32 in: 35 W, 3 919 lm, 42 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED MIRRORED MEDICINE CABINET 24×32 TO 72×30 IN - 110 V

LCMIR-HAR-C





DIMENSIONS · 24 × 32 IN SIZE SHOWN

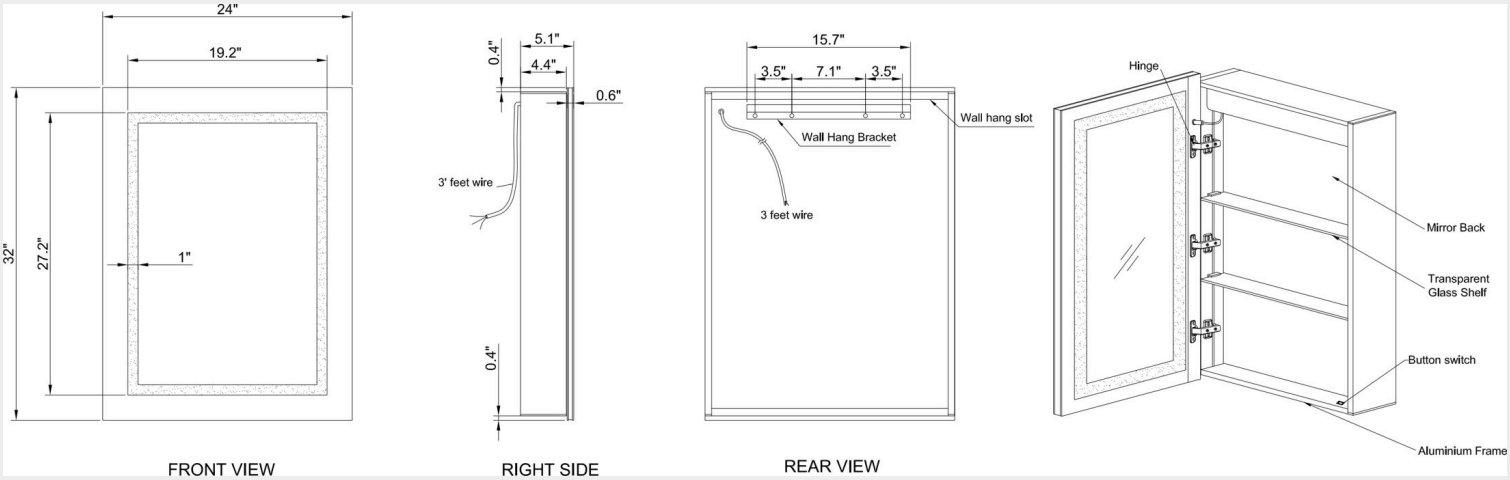


LED MIRRORED MEDICINE CABINET 24×32 TO 72×30 IN - 110 V

LCMIR-HAR-C





DIMENSIONS · 24 × 32 IN SIZE SHOWN

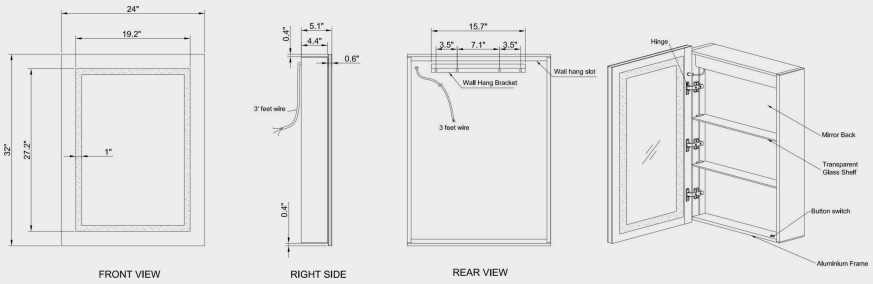

LIGHTED MIRRORED MEDICINE CABINET, 3 SIZES, 2 LIGHT COLORS

Lighted mirrored medicine cabinet for the bathroom, available in 3 sizes, from 24 × 32 in to 72 × 30 in. It delivers 4,480 to 14,910 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,480 to 14,910 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Lighting on the front and back of the doors
- Interior on/off switch
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	34 to 135 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	4,480 to 14,910 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 48 × 28 · 72 × 30 in
Depth	5.1 in
Weight	42 to 138 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED MIRRORED MEDICINE CABINET 24×32 TO 72×30 IN - 110 V

LCMIR-HAR-C

ORDERING

Build the product code

1 Series

LCMIR-HAR-C

2 Size

2432 24 × 32 in
4828 48 × 28 in
7230 72 × 30 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-HAR-C** – **2432** – **60K**
series | 24 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	**34 W**	**4,480 / 4,490 lm**	**42 lb**
48 × 28 in	**70 W**	**8,280 / 8,510 lm**	**90 lb**
72 × 30 in	**135 W**	**14,910 lm**	**138 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-C2432-30K	Dimension : 24X32 · Color temperature : 3000K
LCMIR-HAR-C2432-60K	Dimension : 24X32 · Color temperature : 6000K
LCMIR-HAR-C4828-30K	Dimension : 48X28 · Color temperature : 3000K
LCMIR-HAR-C4828-60K	Dimension : 48X28 · Color temperature : 6000K
LCMIR-HAR-C7230-30K	Dimension : 72X30 · Color temperature : 3000K
LCMIR-HAR-C7230-60K	Dimension : 72X30 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED MIRRORED MEDICINE CABINET 48×36 TO 60×28 IN - 110 V

LCMIR-STE-C





DIMENSIONS · 60 × 28 IN SIZE SHOWN

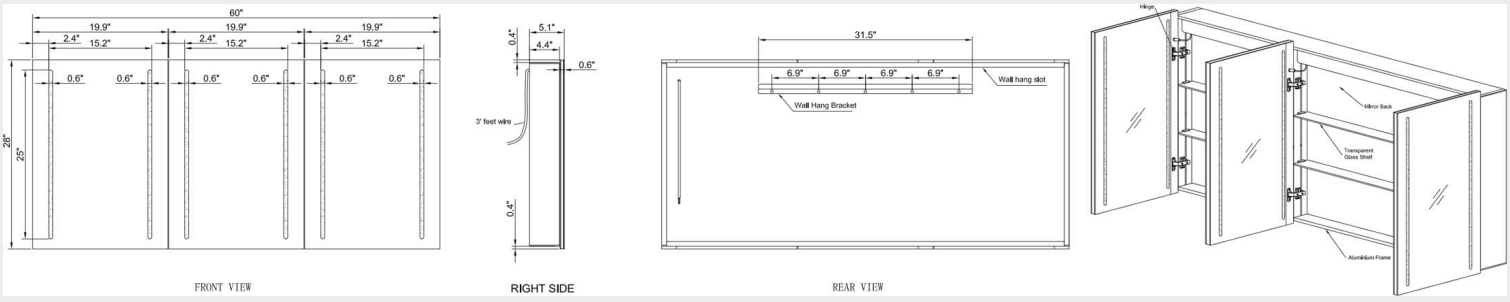


LED MIRRORED MEDICINE CABINET 48×36 TO 60×28 IN - 110 V

LCMIR-STE-C





DIMENSIONS · 60 × 28 IN SIZE SHOWN

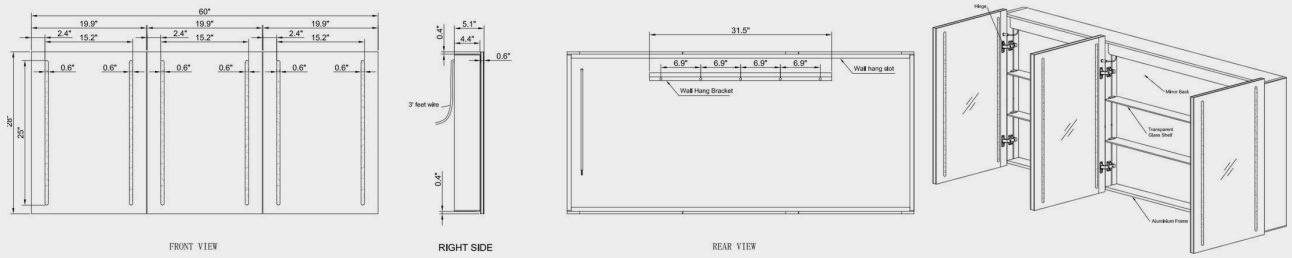

LIGHTED MIRRORED MEDICINE CABINET, 2 SIZES, 2 LIGHT COLORS

Lighted mirrored medicine cabinet for the bathroom, available in 2 sizes, from 48 × 36 in to 60 × 28 in. It delivers 12,400 to 16,360 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 12,400 to 16,360 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- Front-lit and backlit
- Lighting on the front and back of the doors
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	106 to 148 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	12,400 to 16,360 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 36 · 60 × 28 in
Depth	5.1 in
Weight	80 to 102 lb
Doors	2 (48 × 36) · 3 (60 × 28)
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED MIRRORED MEDICINE CABINET 48×36 TO 60×28 IN - 110 V

LCMIR-STE-C

ORDERING

Build the product code

1 Series

`LCMIR-STE-C`

2 Size

`4836` 48 × 36 in
`6028` 60 × 28 in

3 Color

`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE `LCMIR-STE-C` – `6028` – `60K`

series | 60 × 28 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 36 in	`106 W`	`12,400 / 12,760 lm`	`80 lb`
60 × 28 in	`148 W`	`16,360 lm`	`102 lb`

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-STE-C4836-30K`	Dimension : 48X36 · Color temperature : 3000K
`LCMIR-STE-C4836-60K`	Dimension : 48X36 · Color temperature : 6000K
`LCMIR-STE-C6028-30K`	Dimension : 60X28 · Color temperature : 3000K
`LCMIR-STE-C6028-60K`	Dimension : 60X28 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED ORNATE FRONT-LIT MIRROR 48×36 TO 85×40 IN - 110 V

LCMIR-BAR





DIMENSIONS · 48 × 36 IN SIZE SHOWN

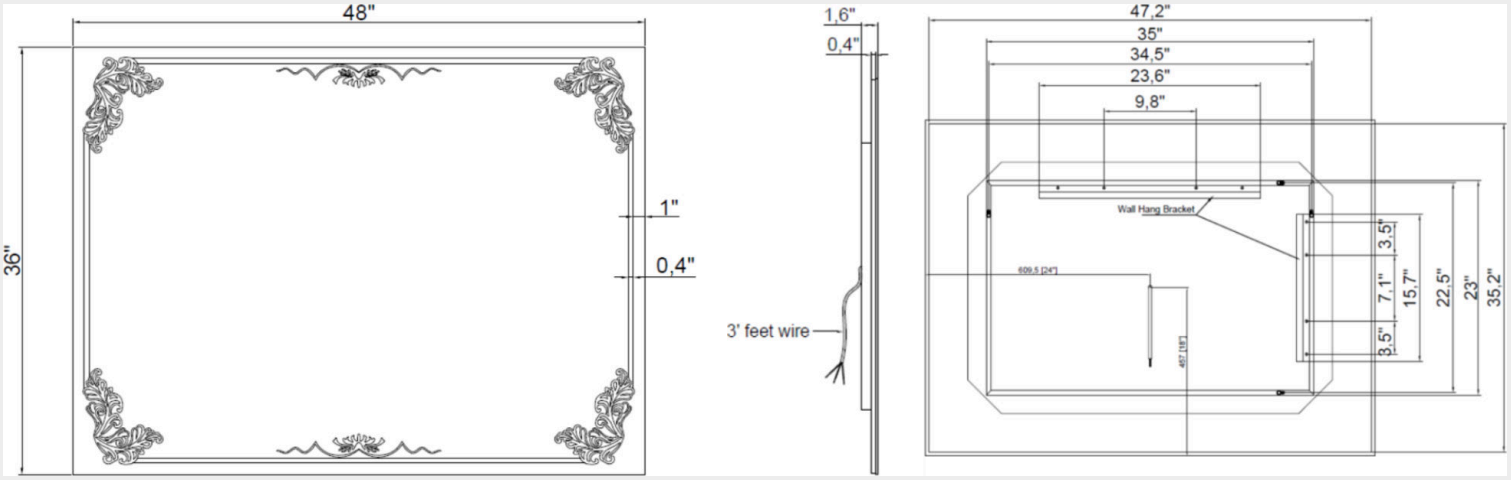


LED ORNATE FRONT-LIT MIRROR 48×36 TO 85×40 IN - 110 V

LCMIR-BAR





DIMENSIONS · 48 × 36 IN SIZE SHOWN

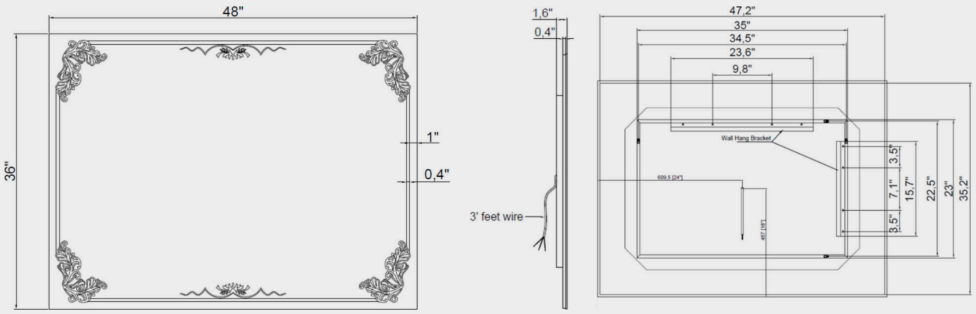

FRONT-LIT LED MIRROR, 3 SIZES, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 48 × 36 in to 85 × 40 in. It delivers 6,720 to 10,560 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 6,720 to 10,560 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	128 to 205 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	6,720 to 10,560 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 36 · 60 × 36 · 85 × 40 in
Depth	1 9/16 in
Weight	52 to 94 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ORNATE FRONT-LIT MIRROR 48×36 TO 85×40 IN - 110 V

LCMIR-BAR

ORDERING

Build the product code

1 Series

LCMIR-BAR

2 Size

4836 48 × 36 in
6036 60 × 36 in
8540 85 × 40 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-BAR** – **4836** – **60K**
series | 48 × 36 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 36 in	**128 W**	**6,720 lm**	**52 lb**
60 × 36 in	**152 W**	**7,900 lm**	**65 lb**
85 × 40 in	**205 W**	**10,560 lm**	**94 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-BAR-4836-30K	Dimension : 48X36 · Color temperature : 3000K
LCMIR-BAR-4836-60K	Dimension : 48X36 · Color temperature : 6000K
LCMIR-BAR-6036-30K	Dimension : 60X36 · Color temperature : 3000K
LCMIR-BAR-6036-60K	Dimension : 60X36 · Color temperature : 6000K
LCMIR-BAR-8540-30K	Dimension : 85X40 · Color temperature : 3000K
LCMIR-BAR-8540-60K	Dimension : 85X40 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED OVAL BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-O





DIMENSIONS: 24 × 36 IN × 1.6 IN

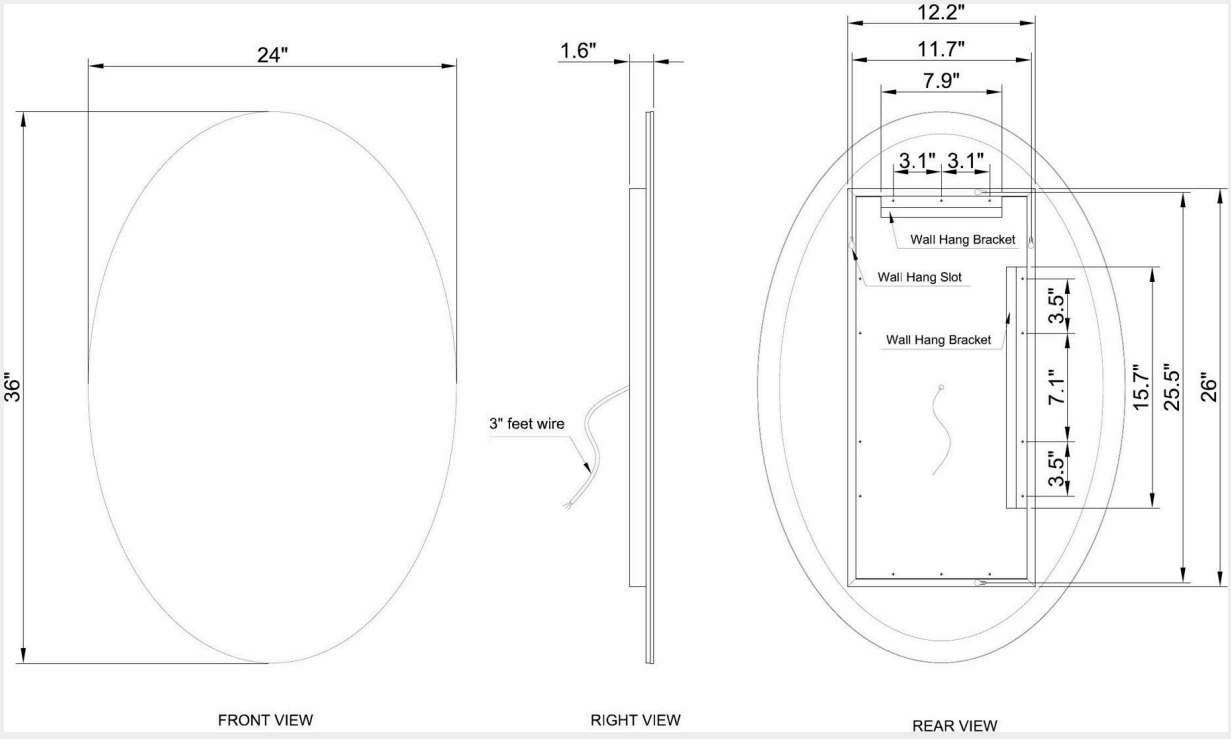


LED OVAL BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-O





DIMENSIONS: 24 × 36 IN × 1.6 IN

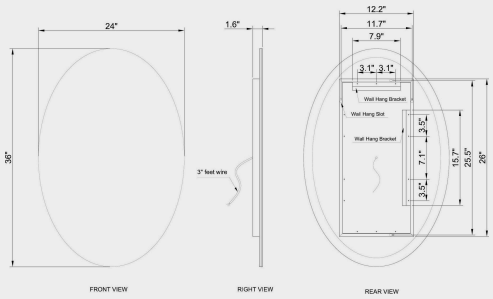

BACKLIT LED MIRROR, 1 SIZE, 4 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 24 × 36 in. It delivers 4,140 to 4,250 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,140 to 4,250 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	4,140 to 4,250 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Size	24 × 36 in
Depth	1.6 in
Weight	18 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED OVAL BACKLIT MIRROR 24×36 IN 38 W - 110 V

LCMIR-ORIG-O

ORDERING

Build the product code

1 Series

LCMIR-ORIG-O

2 Size

2436 24 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ORIG-O** – **2436** – **60K**
series | 24 × 36 in | 6000K cool white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ORIG-O-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-ORIG-O-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-ORIG-O-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-ORIG-O-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW

Per size (3000K / 6000K lumens when they differ) — 24 × 36 in: 38 W, 4140 / 4250 lm, 18 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED OVAL FRONT-LIT MIRROR 24×36 TO 30×48 IN - 110 V

LCMIR-GALA-O





DIMENSIONS · 24 × 36 IN SIZE SHOWN

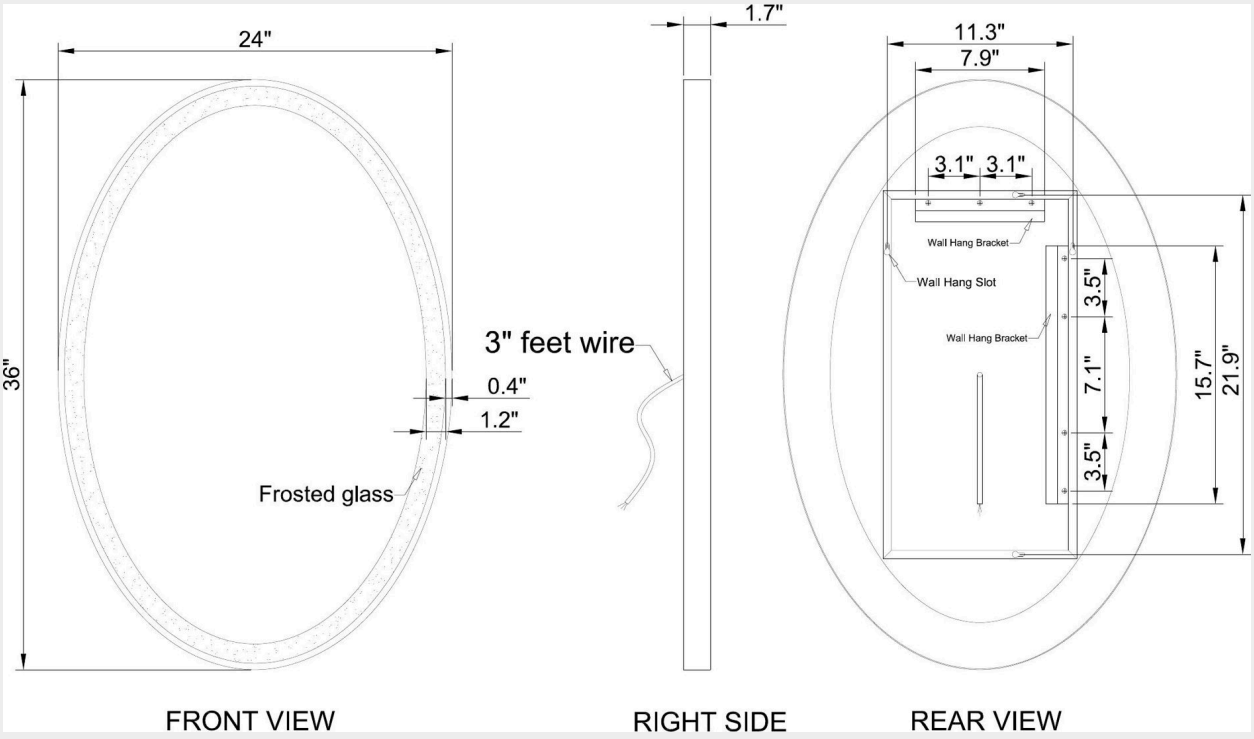


LED OVAL FRONT-LIT MIRROR 24×36 TO 30×48 IN - 110 V

LCMIR-GALA-O





DIMENSIONS · 24 × 36 IN SIZE SHOWN

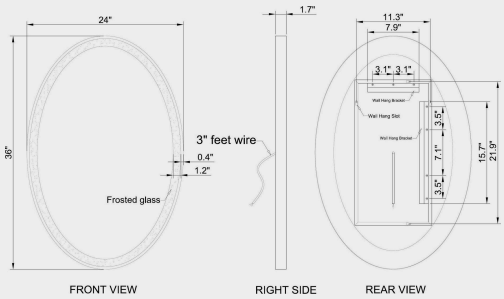

FRONT-LIT LED MIRROR, 2 SIZES, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 2 sizes, from 24 × 36 in to 30 × 48 in. It delivers 3,810 to 5,450 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,810 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	33 to 50 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	3,810 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 30 × 48 in
Depth	1.7 in
Weight	20 to 30 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED OVAL FRONT-LIT MIRROR 24×36 TO 30×48 IN - 110 V

LCMIR-GALA-O

ORDERING

Build the product code

1 Series

LCMIR-GALA-O

2 Size

2436 24 × 36 in
3048 30 × 48 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-GALA-O** – **2436** – **60K**
series | 24 × 36 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	33 W	3,810 / 3,910 lm	20 lb
30 × 48 in	50 W	5,440 / 5,450 lm	30 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GALA-O-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-GALA-O-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-GALA-O-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-GALA-O-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW
LCMIR-GALA-O-3048-30K	Dimension : 30X48 · Color temperature : 3000K
LCMIR-GALA-O-3048-3CCT-TS	Dimension : 30X48 · Color temperature : 3CCT selectable
LCMIR-GALA-O-3048-60K	Dimension : 30X48 · Color temperature : 6000K
LCMIR-GALA-O-3048-RGBW	Dimension : 30X48 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED OVAL MIRRORED MEDICINE CABINET 18×36 TO 18×48 IN

LCMIR-ONYX-C





DIMENSIONS · 18 × 36 IN SIZE SHOWN

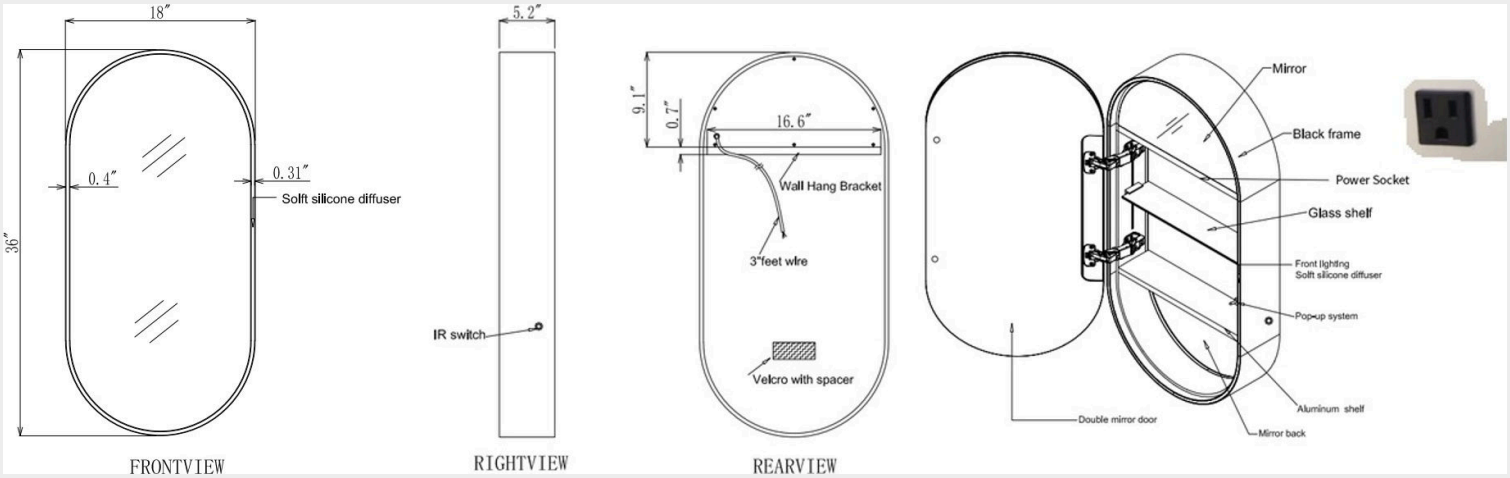


LED OVAL MIRRORED MEDICINE CABINET 18×36 TO 18×48 IN

LCMIR-ONYX-C





DIMENSIONS · 18 × 36 IN SIZE SHOWN

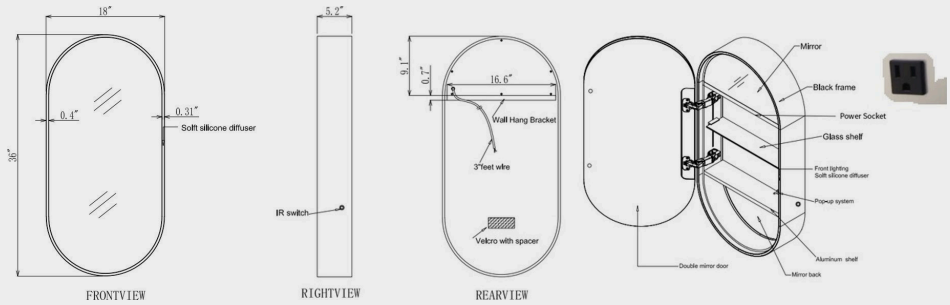

LIGHTED MIRRORED MEDICINE CABINET, 3 SIZES

Lighted mirrored medicine cabinet for the bathroom, available in 3 sizes, from 18 × 36 in to 18 × 48 in. It delivers 2,600 to 3,800 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,600 to 3,800 lm · CRI 90+
- 3 CCT by touch sensor
- Interior on/off switch
- Soft-close door
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 to 42 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,600 to 3,800 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	18 × 36 · 18 × 42 · 18 × 48 in
Weight	36 to 50 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED OVAL MIRRORED MEDICINE CABINET 18×36 TO 18×48 IN

LCMIR-ONYX-C

ORDERING

Build the product code

1 Series

LCMIR-ONYX-C

2 Size

1836 18 × 36 in
1842 18 × 42 in
1848 18 × 48 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-ONYX-C** – **1836** – **BK** – **3CCT-TS**

series | 18 × 36 in | black | 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
18 × 36 in	35 W	2,600 lm	36 lb
18 × 42 in	38 W	3,200 lm	42 lb
18 × 48 in	42 W	3,800 lm	50 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ONYX-C1836-BK-3CCT-TS	Dimension : 18X36 · Color temperature : 3CCT selectable
LCMIR-ONYX-C1842-BK-3CCT-TS	Dimension : 18X42 · Color temperature : 3CCT selectable
LCMIR-ONYX-C1848-BK-3CCT-TS	Dimension : 18X48 · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED RECTANGULAR BACKLIT MIRROR 20×28 TO 48×35 IN

LCMIR-ORIG-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

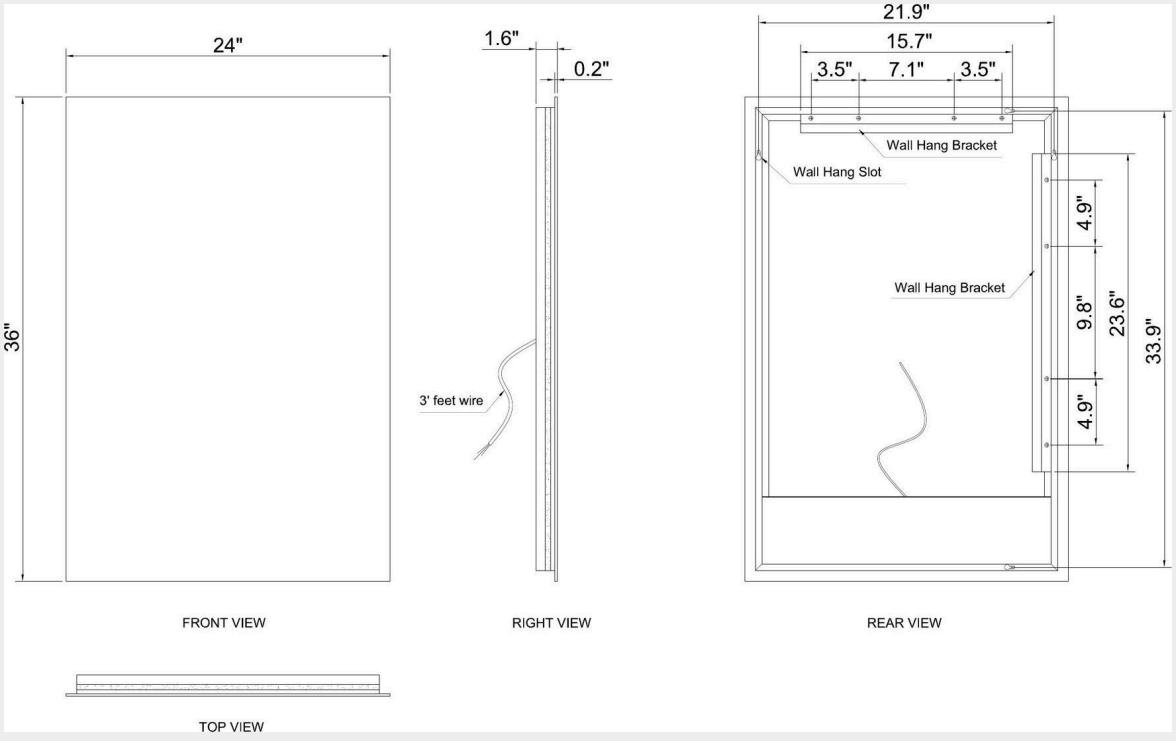


LED RECTANGULAR BACKLIT MIRROR 20×28 TO 48×35 IN

LCMIR-ORIG-BL





DIMENSIONS · 24 × 36 IN SIZE SHOWN



BACKLIT LED MIRROR, 5 SIZES, 5 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 5 sizes, from 20 × 28 in to 48 × 35 in. It delivers 3,555 to 7,830 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 6 other sizes (separate sheet): 55 × 36, 60 × 36, 70 × 32, 70 × 45, 85 × 40, 100 × 45 in, 11 sizes in all.

FEATURES

- 3,555 to 7,830 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 65 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,555 to 7,830 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 28 · 24 × 36 · 30 × 42 · 36 × 36 · 48 × 35 in
Depth	1.6 in
Weight	12 to 32 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR BACKLIT MIRROR 20×28 TO 48×35 IN

LCMIR-ORIG-BL

ORDERING

Build the product code

1 Series

LCMIR-ORIG-BL

2 Size

2028 20 × 28 in
2436 24 × 36 in
3042 30 × 42 in
3636 36 × 36 in
4835 48 × 35 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ORIG-BL** – **2436** – **60K**
series · 24 × 36 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 28 in	**30 W**	**3,555 lm**	**12 lb**
24 × 36 in	**50 W**	**5,440 / 5,450 lm**	**20 lb**
30 × 42 in	**58 W**	**5,760 lm**	**28 lb**
36 × 36 in	**58 W**	**6,410 / 6,430 lm**	**30 lb**
48 × 35 in	**65 W**	**7,620 / 7,830 lm**	**32 lb**

LED RECTANGULAR BACKLIT MIRROR 20×28 TO 48×35 IN

LCMIR-ORIG-BL

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ORIG-BL-2028-30K	Size: 20 × 28 in · 3000K
LCMIR-ORIG-BL-2028-60K	Size: 20 × 28 in · 6000K
LCMIR-ORIG-BL-2028-CCT	Size: 20 × 28 in · Tunable white, remote (2700K-6000K)
LCMIR-ORIG-BL-2028-RGBW	Size: 20 × 28 in · Multicolor RGB
LCMIR-ORIG-BL-2436-30K	Size: 24 × 36 in · 3000K
LCMIR-ORIG-BL-2436-3CCT-TS	Size: 24 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-2436-60K	Size: 24 × 36 in · 6000K
LCMIR-ORIG-BL-2436-RGBW	Size: 24 × 36 in · Multicolor RGB
LCMIR-ORIG-BL-3042-30K	Size: 30 × 42 in · 3000K
LCMIR-ORIG-BL-3042-3CCT-TS	Size: 30 × 42 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-3042-60K	Size: 30 × 42 in · 6000K
LCMIR-ORIG-BL-3042-RGBW	Size: 30 × 42 in · Multicolor RGB
LCMIR-ORIG-BL-3636-30K	Size: 36 × 36 in · 3000K
LCMIR-ORIG-BL-3636-3CCT-TS	Size: 36 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-3636-60K	Size: 36 × 36 in · 6000K
LCMIR-ORIG-BL-3636-RGBW	Size: 36 × 36 in · Multicolor RGB
LCMIR-ORIG-BL-4835-30K	Size: 48 × 35 in · 3000K
LCMIR-ORIG-BL-4835-3CCT-TS	Size: 48 × 35 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-4835-60K	Size: 48 × 35 in · 6000K
LCMIR-ORIG-BL-4835-RGBW	Size: 48 × 35 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR BACKLIT MIRROR 55×36 TO 100×45 IN

LCMIR-ORIG-BL





DIMENSIONS · 55 × 36 IN SIZE SHOWN

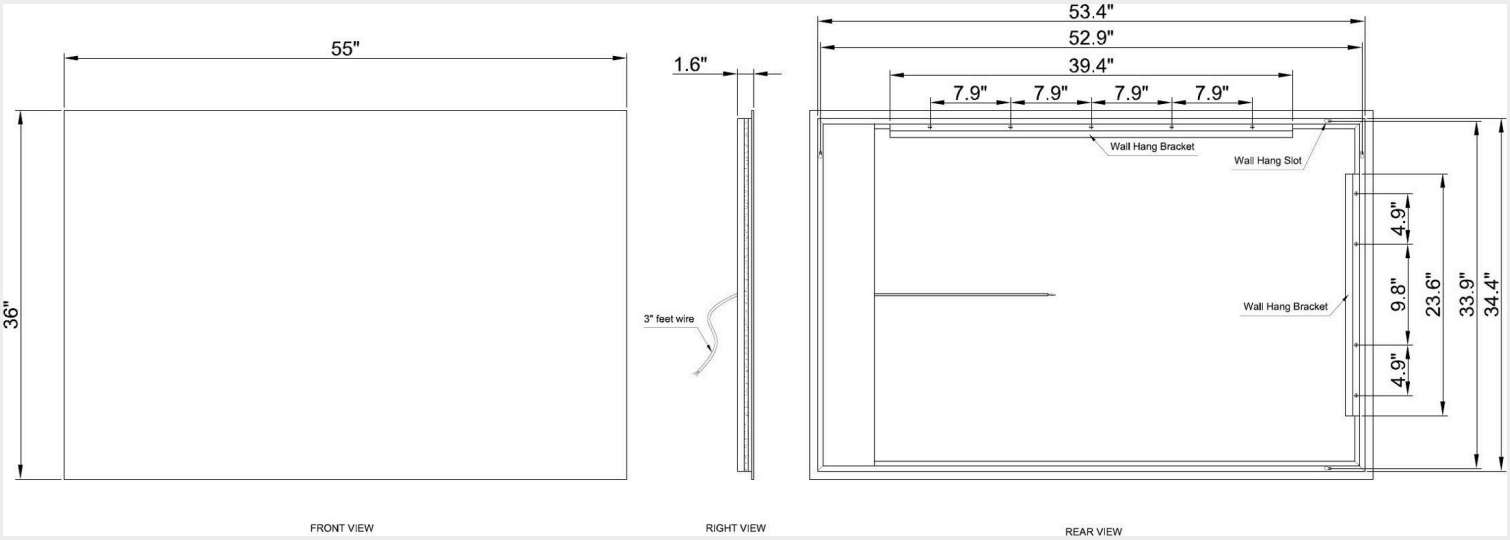


LED RECTANGULAR BACKLIT MIRROR 55×36 TO 100×45 IN

LCMIR-ORIG-BL





DIMENSIONS · 55 × 36 IN SIZE SHOWN

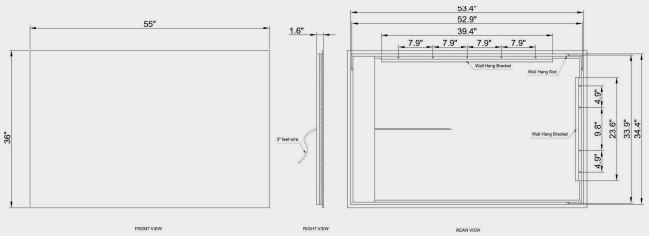

BACKLIT LED MIRROR, 6 SIZES, 5 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 6 sizes, from 55 × 36 in to 100 × 45 in. It delivers 7,940 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 5 other sizes (separate sheet): 20 × 28, 24 × 36, 30 × 42, 36 × 36, 48 × 35 in, 11 sizes in all.

FEATURES

- 7,940 to 12,860 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	72 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	7,940 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	55 × 36 · 60 × 36 · 70 × 32 · 70 × 45 · 85 × 40 · 100 × 45 in
Depth	1.6 in
Weight	36 to 86 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR BACKLIT MIRROR 55×36 TO 100×45 IN

LCMIR-ORIG-BL

ORDERING

Build the product code

1 Series

LCMIR-ORIG-BL

2 Size

5536 55 × 36 in
6036 60 × 36 in
7032 70 × 32 in
7045 70 × 45 in
8540 85 × 40 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ORIG-BL** – **10045** – **30K**

series | 100 × 45 in | 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
55 × 36 in	72 W	7,940 lm	42 lb
60 × 36 in	76 W	8,940 / 9,180 lm	36 lb
70 × 32 in	90 W	9,920 / 9,940 lm	45 lb
70 × 45 in	95 W	10,940 lm	65 lb
85 × 40 in	107 W	11,860 / 11,880 lm	70 lb
100 × 45 in	116 W	12,830 / 12,860 lm	86 lb

LED RECTANGULAR BACKLIT MIRROR 55×36 TO 100×45 IN

LCMIR-ORIG-BL

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ORIG-BL-10045-30K	Size: 100 × 45 in · 3000K
LCMIR-ORIG-BL-10045-60K	Size: 100 × 45 in · 6000K
LCMIR-ORIG-BL-10045-CCT	Size: 100 × 45 in · Tunable white, remote (2700K-6000K)
LCMIR-ORIG-BL-10045-RGBW	Size: 100 × 45 in · Multicolor RGB
LCMIR-ORIG-BL-5536-30K	Size: 55 × 36 in · 3000K
LCMIR-ORIG-BL-5536-3CCT-TS	Size: 55 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-5536-60K	Size: 55 × 36 in · 6000K
LCMIR-ORIG-BL-5536-RGBW	Size: 55 × 36 in · Multicolor RGB
LCMIR-ORIG-BL-6036-30K	Size: 60 × 36 in · 3000K
LCMIR-ORIG-BL-6036-3CCT-TS	Size: 60 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-6036-60K	Size: 60 × 36 in · 6000K
LCMIR-ORIG-BL-6036-RGBW	Size: 60 × 36 in · Multicolor RGB
LCMIR-ORIG-BL-7032-30K	Size: 70 × 32 in · 3000K
LCMIR-ORIG-BL-7032-3CCT-TS	Size: 70 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-7032-60K	Size: 70 × 32 in · 6000K
LCMIR-ORIG-BL-7032-RGBW	Size: 70 × 32 in · Multicolor RGB
LCMIR-ORIG-BL-7045-30K	Size: 70 × 45 in · 3000K
LCMIR-ORIG-BL-7045-3CCT-TS	Size: 70 × 45 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-ORIG-BL-7045-60K	Size: 70 × 45 in · 6000K
LCMIR-ORIG-BL-7045-RGBW	Size: 70 × 45 in · Multicolor RGB
LCMIR-ORIG-BL-8540-30K	Size: 85 × 40 in · 3000K
LCMIR-ORIG-BL-8540-60K	Size: 85 × 40 in · 6000K
LCMIR-ORIG-BL-8540-CCT	Size: 85 × 40 in · Tunable white, remote (2700K-6000K)
LCMIR-ORIG-BL-8540-RGBW	Size: 85 × 40 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR FRONT-LIT MIRROR 20×26 TO 40×35 IN

LCMIR-HAR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

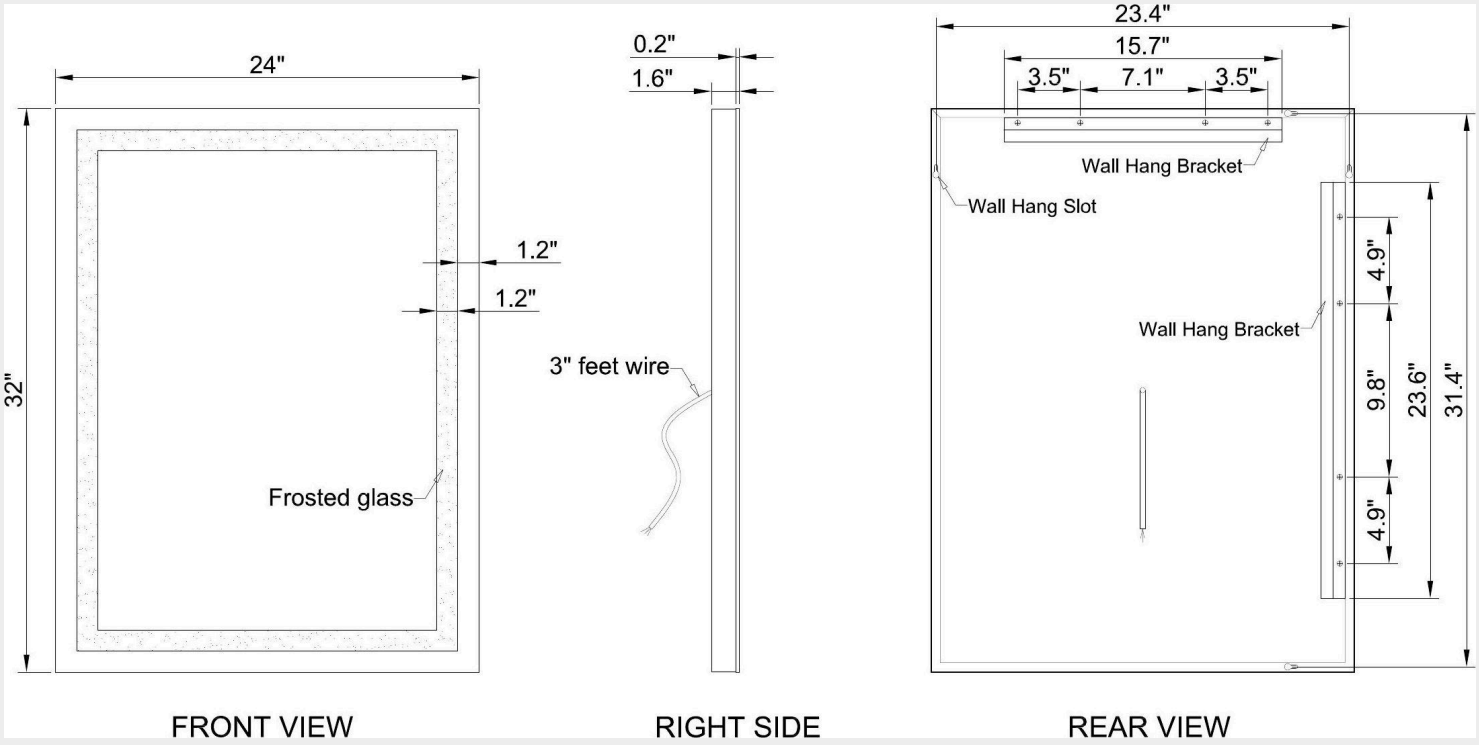


LED RECTANGULAR FRONT-LIT MIRROR 20×26 TO 40×35 IN

LCMIR-HAR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

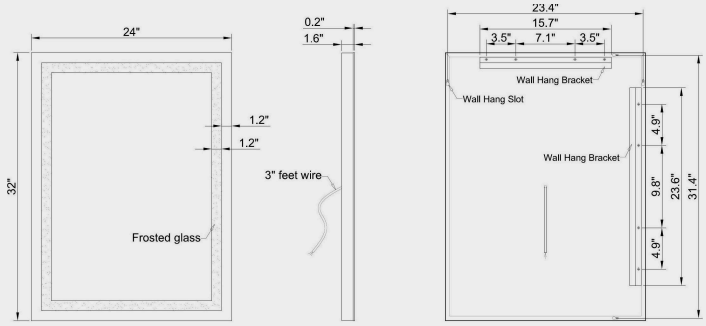

FRONT VIEW | RIGHT SIDE | REAR VIEW

FRONT-LIT LED MIRROR, 7 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 7 sizes, from 20 × 26 in to 40 × 35 in. It delivers 3,450 to 5,940 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 11 other sizes (separate sheet): 40 × 40, 48 × 24, 48 × 28, 48 × 35, 55 × 36, 60 × 28, 60 × 45, 70 × 32, 70 × 45, 85 × 40, 100 × 45 in, 18 sizes in all.

FEATURES

- 3,450 to 5,940 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	30 to 54 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,450 to 5,940 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 26 · 24 × 32 · 30 × 42 · 32 × 32 · 36 × 36 · 40 × 24 · 40 × 35 in
Depth	1.6 in
Weight	21 to 38 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 20×26 TO 40×35 IN

LCMIR-HAR

ORDERING

Build the product code

1 Series

LCMIR-HAR

2 Size

2026 20 × 26 in
2432 24 × 32 in
3042 30 × 42 in
3232 32 × 32 in
3636 36 × 36 in
4024 40 × 24 in
4035 40 × 35 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR** – **2432** – **60K**

series | 24 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 26 in	30 W	3,450 / 3,550 lm	21 lb
24 × 32 in	35 W	4,140 / 4,250 lm	22 lb
30 × 42 in	54 W	5,740 lm	33 lb
32 × 32 in	45 W	4,974 lm	28 lb
36 × 36 in	54 W	5,930 / 5,940 lm	34 lb
40 × 24 in	45 W	4,960 / 4,970 lm	26 lb
40 × 35 in	54 W	5,930 / 5,940 lm	38 lb

LED RECTANGULAR FRONT-LIT MIRROR 20×26 TO 40×35 IN

LCMIR-HAR

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-2026-30K	Size: 20 × 26 in · 3000K
LCMIR-HAR-2026-3CCT-TS	Size: 20 × 26 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-2026-60K	Size: 20 × 26 in · 6000K
LCMIR-HAR-2026-CCT	Size: 20 × 26 in · Tunable white, remote (2700K-6000K)
LCMIR-HAR-2026-RGBW	Size: 20 × 26 in · Multicolor RGB
LCMIR-HAR-2432-30K	Size: 24 × 32 in · 3000K
LCMIR-HAR-2432-3CCT-TS	Size: 24 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-2432-60K	Size: 24 × 32 in · 6000K
LCMIR-HAR-2432-RGBW	Size: 24 × 32 in · Multicolor RGB
LCMIR-HAR-3042-30K	Size: 30 × 42 in · 3000K
LCMIR-HAR-3042-3CCT-TS	Size: 30 × 42 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-3042-60K	Size: 30 × 42 in · 6000K
LCMIR-HAR-3042-RGBW	Size: 30 × 42 in · Multicolor RGB
LCMIR-HAR-3232-30K	Size: 32 × 32 in · 3000K
LCMIR-HAR-3232-3CCT-TS	Size: 32 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-3232-60K	Size: 32 × 32 in · 6000K
LCMIR-HAR-3232-RGBW	Size: 32 × 32 in · Multicolor RGB
LCMIR-HAR-3636-30K	Size: 36 × 36 in · 3000K
LCMIR-HAR-3636-3CCT-TS	Size: 36 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-3636-60K	Size: 36 × 36 in · 6000K
LCMIR-HAR-3636-RGBW	Size: 36 × 36 in · Multicolor RGB
LCMIR-HAR-4024-30K	Size: 40 × 24 in · 3000K
LCMIR-HAR-4024-3CCT-TS	Size: 40 × 24 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4024-60K	Size: 40 × 24 in · 6000K
LCMIR-HAR-4024-RGBW	Size: 40 × 24 in · Multicolor RGB
LCMIR-HAR-4035-30K	Size: 40 × 35 in · 3000K
LCMIR-HAR-4035-3CCT-TS	Size: 40 × 35 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4035-60K	Size: 40 × 35 in · 6000K
LCMIR-HAR-4035-RGBW	Size: 40 × 35 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR FRONT-LIT MIRROR 24×32 TO 60×28 IN

LCMIR-AUR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

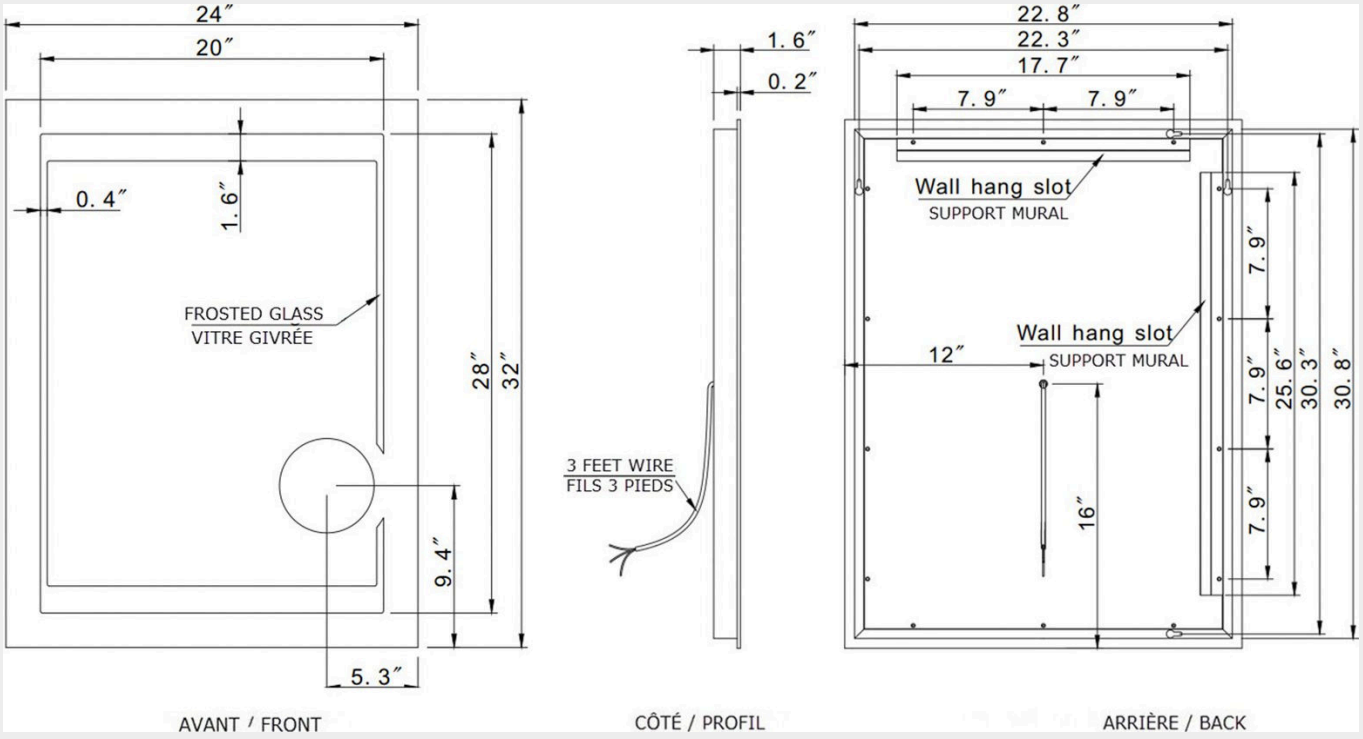


LED RECTANGULAR FRONT-LIT MIRROR 24×32 TO 60×28 IN

LCMIR-AUR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

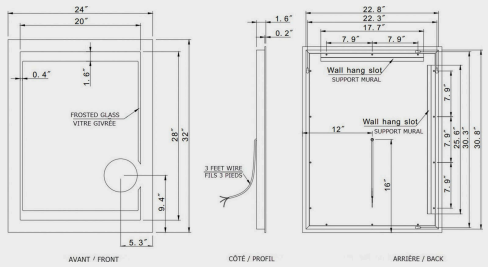

FRONT-LIT LED MIRROR, 3 SIZES, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 24 × 32 in to 60 × 28 in. It delivers 4,960 to 9,940 lumens depending on size, with a CRI of 90+. Frame: silver. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,960 to 9,940 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Frame: silver
- Integrated 3x magnifier
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	45 to 90 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	4,960 to 9,940 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 48 × 28 · 60 × 28 in
Depth	1.6 in
Weight	22 to 37 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 24×32 TO 60×28 IN

LCMIR-AUR

ORDERING

Build the product code

1 Series

LCMIR-AUR

2 Size

2432 24 × 32 in
4828 48 × 28 in
6028 60 × 28 in

3 Frame

4 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-AUR** – **2432** – **60K**
series — 24 × 32 in — 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	**45 W**	**4,960 / 4,970 lm**	**22 lb**
48 × 28 in	**60 W**	**7,110 lm**	**37 lb**
60 × 28 in	**90 W**	**9,920 / 9,940 lm**	**36 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-AUR-2432-30K	Dimension : 24X32 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-AUR-2432-3CCT-TS	Dimension : 24X32 · Color du cadre : Silver · Color temperature : 3CCT selectable
LCMIR-AUR-2432-60K	Dimension : 24X32 · Color du cadre : Silver · Color temperature : 6000K
LCMIR-AUR-2432-RGBW	Dimension : 24X32 · Color du cadre : Silver · Color temperature : RGBW
LCMIR-AUR-4828-30K	Dimension : 48X28 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-AUR-4828-3CCT-TS	Dimension : 48X28 · Color du cadre : Silver · Color temperature : 3CCT selectable
LCMIR-AUR-4828-60K	Dimension : 48X28 · Color du cadre : Silver · Color temperature : 6000K
LCMIR-AUR-4828-RGBW	Dimension : 48X28 · Color du cadre : Silver · Color temperature : RGBW
LCMIR-AUR-6028-30K	Dimension : 60X28 · Color du cadre : Silver · Color temperature : 3000K
LCMIR-AUR-6028-3CCT-TS	Dimension : 60X28 · Color du cadre : Silver · Color temperature : 3CCT selectable
LCMIR-AUR-6028-60K	Dimension : 60X28 · Color du cadre : Silver · Color temperature : 6000K
LCMIR-AUR-6028-RGBW	Dimension : 60X28 · Color du cadre : Silver · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR FRONT-LIT MIRROR 24×36 TO 55×36 IN

LCMIR-GALA





DIMENSIONS · 24 × 36 IN SIZE SHOWN

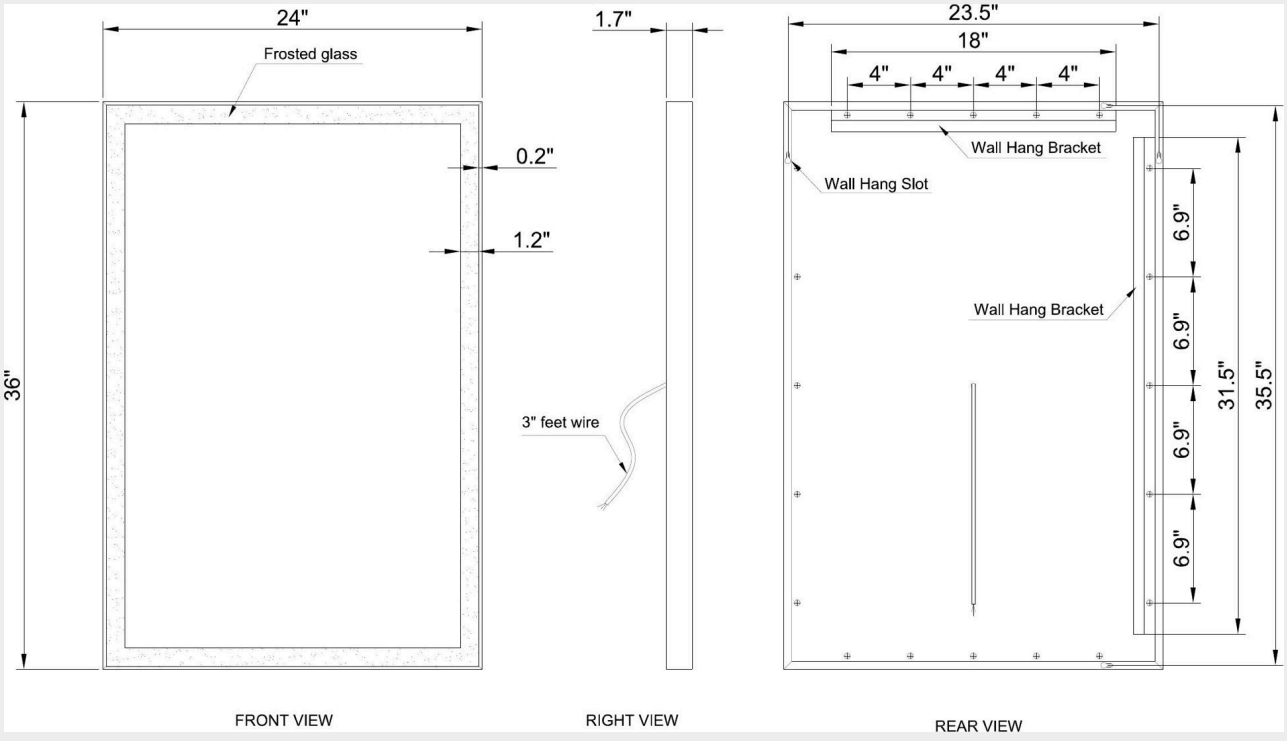


LED RECTANGULAR FRONT-LIT MIRROR 24×36 TO 55×36 IN

LCMIR-GALA





DIMENSIONS · 24 × 36 IN SIZE SHOWN

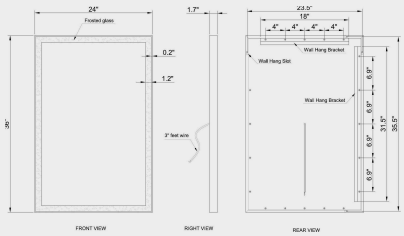

FRONT-LIT LED MIRROR, 7 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 7 sizes, from 24 × 36 in to 55 × 36 in. It delivers 4,974 to 8,512 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 6 other sizes (separate sheet): 60 × 40, 60 × 45, 65 × 28, 70 × 32, 85 × 40, 100 × 45 in, 13 sizes in all.

FEATURES

- 4,974 to 8,512 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Powder-coated gray frame
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	45 to 70 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	4,974 to 8,512 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 36 × 36 · 40 × 36 · 42 × 42 · 48 × 28 · 48 × 36 · 55 × 36 in
Depth	1.7 in
Weight	25 to 54 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 24×36 TO 55×36 IN

LCMIR-GALA

ORDERING

Build the product code

1 Series

LCMIR-GALA

2 Size

2436 24 × 36 in
3636 36 × 36 in
4036 40 × 36 in
4242 42 × 42 in
4828 48 × 28 in
4836 48 × 36 in
5536 55 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-GALA** – **2436** – **60K**
series | 24 × 36 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	45 W	4,974 lm	25 lb
36 × 36 in	54 W	5,943 lm	36 lb
40 × 36 in	58 W	6,410 / 6,430 lm	40 lb
42 × 42 in	65 W	7,620 / 7,830 lm	47 lb
48 × 28 in	58 W	6,410 / 6,430 lm	35 lb
48 × 36 in	65 W	7,838 lm	47 lb
55 × 36 in	70 W	8,512 lm	54 lb

LED RECTANGULAR FRONT-LIT MIRROR 24×36 TO 55×36 IN

LCMIR-GALA

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GALA-2436-30K	Size: 24 × 36 in · 3000K
LCMIR-GALA-2436-3CCT-TS	Size: 24 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-2436-60K	Size: 24 × 36 in · 6000K
LCMIR-GALA-2436-RGBW	Size: 24 × 36 in · Multicolor RGB
LCMIR-GALA-3636-30K	Size: 36 × 36 in · 3000K
LCMIR-GALA-3636-3CCT-TS	Size: 36 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-3636-60K	Size: 36 × 36 in · 6000K
LCMIR-GALA-3636-RGBW	Size: 36 × 36 in · Multicolor RGB
LCMIR-GALA-4036-30K	Size: 40 × 36 in · 3000K
LCMIR-GALA-4036-3CCT-TS	Size: 40 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-4036-60K	Size: 40 × 36 in · 6000K
LCMIR-GALA-4036-RGBW	Size: 40 × 36 in · Multicolor RGB
LCMIR-GALA-4242-30K	Size: 42 × 42 in · 3000K
LCMIR-GALA-4242-3CCT-TS	Size: 42 × 42 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-4242-60K	Size: 42 × 42 in · 6000K
LCMIR-GALA-4242-RGBW	Size: 42 × 42 in · Multicolor RGB
LCMIR-GALA-4828-30K	Size: 48 × 28 in · 3000K
LCMIR-GALA-4828-3CCT-TS	Size: 48 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-4828-60K	Size: 48 × 28 in · 6000K
LCMIR-GALA-4828-RGBW	Size: 48 × 28 in · Multicolor RGB
LCMIR-GALA-4836-30K	Size: 48 × 36 in · 3000K
LCMIR-GALA-4836-3CCT-TS	Size: 48 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-4836-60K	Size: 48 × 36 in · 6000K
LCMIR-GALA-4836-RGBW	Size: 48 × 36 in · Multicolor RGB
LCMIR-GALA-5536-30K	Size: 55 × 36 in · 3000K
LCMIR-GALA-5536-3CCT-TS	Size: 55 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-5536-60K	Size: 55 × 36 in · 6000K
LCMIR-GALA-5536-RGBW	Size: 55 × 36 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR FRONT-LIT MIRROR 40×40 TO 60×28 IN

LCMIR-HAR





DIMENSIONS · 40 × 40 IN SIZE SHOWN

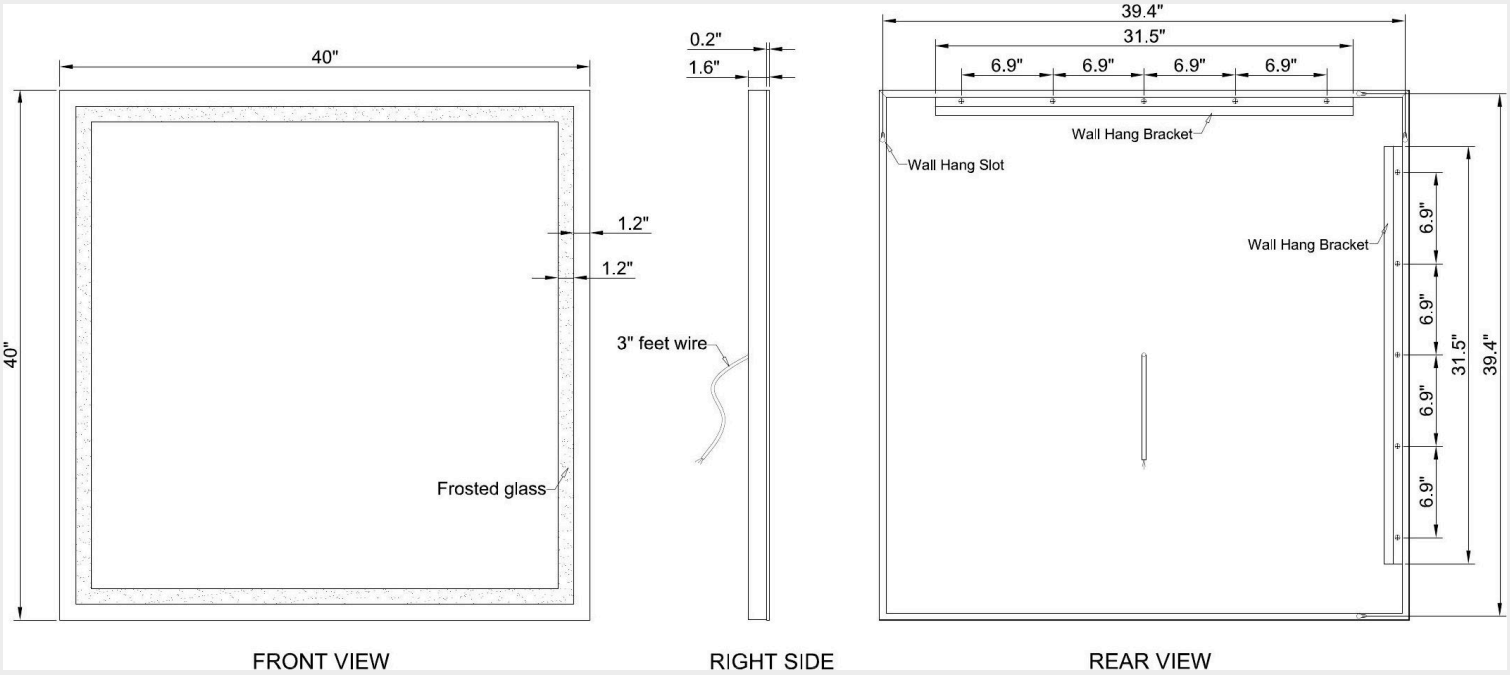

FRONT VIEW RIGHT SIDE REAR VIEW


LED RECTANGULAR FRONT-LIT MIRROR 40×40 TO 60×28 IN

LCMIR-HAR





DIMENSIONS · 40 × 40 IN SIZE SHOWN

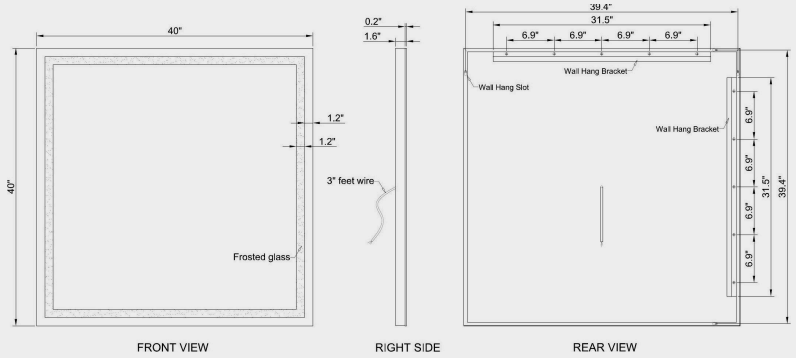

FRONT-LIT LED MIRROR, 6 SIZES, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 6 sizes, from 40 × 40 in to 60 × 28 in. It delivers 5,440 to 7,830 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 12 other sizes (separate sheet): 20 × 26, 24 × 32, 30 × 42, 32 × 32, 36 × 36, 40 × 24, 40 × 35, 60 × 45, 70 × 32, 70 × 45, 85 × 40, 100 × 45 in, 18 sizes in all.

FEATURES

- 5,440 to 7,830 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	54 to 65 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	5,440 to 7,830 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	40 × 40 · 48 × 24 · 48 × 28 · 48 × 35 · 55 × 36 · 60 × 28 in
Depth	1.6 in
Weight	31 to 52 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 40×40 TO 60×28 IN

LCMIR-HAR

ORDERING

Build the product code

1 Series

`LCMIR-HAR`

2 Size

- **4040** 40 × 40 in
- **4824** 48 × 24 in
- **4828** 48 × 28 in
- **4835** 48 × 35 in
- **5536** 55 × 36 in
- **6028** 60 × 28 in

3 Color

- **30K** 3000K warm white
- **60K** 6000K cool white
- **3CCT-TS** 3000K / 4000K / 6000K by touch sensor
- **RGBW** RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR – 4040 – 30K**

series · 40 × 40 in · 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
40 × 40 in	58 W	6,410 / 6,430 lm	42 lb
48 × 24 in	54 W	5,440 / 5,450 lm	31 lb
48 × 28 in	54 W	5,930 / 5,940 lm	36 lb
48 × 35 in	60 W	6,910 / 7,110 lm	45 lb
55 × 36 in	65 W	7,620 / 7,830 lm	52 lb
60 × 28 in	65 W	7,620 / 7,830 lm	45 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-4040-30K	Size: 40 × 40 in · 3000K
LCMIR-HAR-4040-3CCT-TS	Size: 40 × 40 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4040-60K	Size: 40 × 40 in · 6000K
LCMIR-HAR-4040-RGBW	Size: 40 × 40 in · Multicolor RGB
LCMIR-HAR-4824-30K	Size: 48 × 24 in · 3000K
LCMIR-HAR-4824-3CCT-TS	Size: 48 × 24 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4824-60K	Size: 48 × 24 in · 6000K
LCMIR-HAR-4824-RGBW	Size: 48 × 24 in · Multicolor RGB
LCMIR-HAR-4828-30K	Size: 48 × 28 in · 3000K
LCMIR-HAR-4828-3CCT-TS	Size: 48 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4828-60K	Size: 48 × 28 in · 6000K
LCMIR-HAR-4828-RGBW	Size: 48 × 28 in · Multicolor RGB
LCMIR-HAR-4835-30K	Size: 48 × 35 in · 3000K
LCMIR-HAR-4835-3CCT-TS	Size: 48 × 35 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-4835-60K	Size: 48 × 35 in · 6000K
LCMIR-HAR-4835-RGBW	Size: 48 × 35 in · Multicolor RGB
LCMIR-HAR-5536-30K	Size: 55 × 36 in · 3000K
LCMIR-HAR-5536-3CCT-TS	Size: 55 × 36 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-5536-60K	Size: 55 × 36 in · 6000K
LCMIR-HAR-5536-RGBW	Size: 55 × 36 in · Multicolor RGB
LCMIR-HAR-6028-30K	Size: 60 × 28 in · 3000K
LCMIR-HAR-6028-3CCT-TS	Size: 60 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-6028-60K	Size: 60 × 28 in · 6000K
LCMIR-HAR-6028-RGBW	Size: 60 × 28 in · Multicolor RGB

LED RECTANGULAR FRONT-LIT MIRROR 40×40 TO 60×28 IN

LCMIR-HAR

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.

LED RECTANGULAR FRONT-LIT MIRROR 48×36 TO 70×32 IN


LCMIR-FLOR



TEMPÉRATURE DE COULEUR / *COLOR TEMPERATURE*

Température de couleur chaude (3000K) vs. froide (6000K).

Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante


Cool white light
Bright, energizing atmosphere

Image de comparaison. Ne représente pas le produit réel.
Comparison image. Does not represent actual product.

DIMENSIONS · 48 × 36 IN SIZE SHOWN

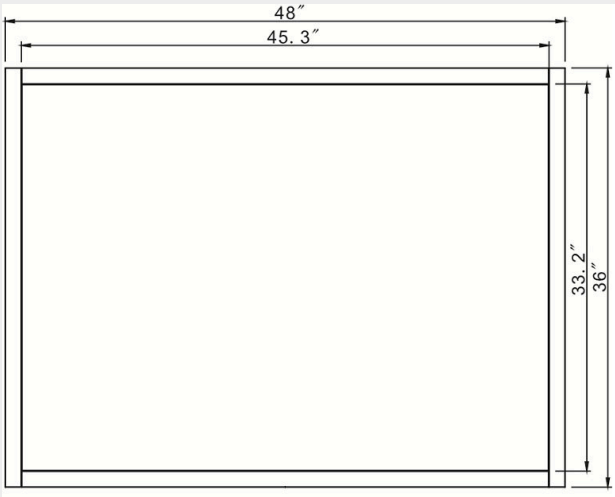

VUE DE FACE / FRONT VIEW

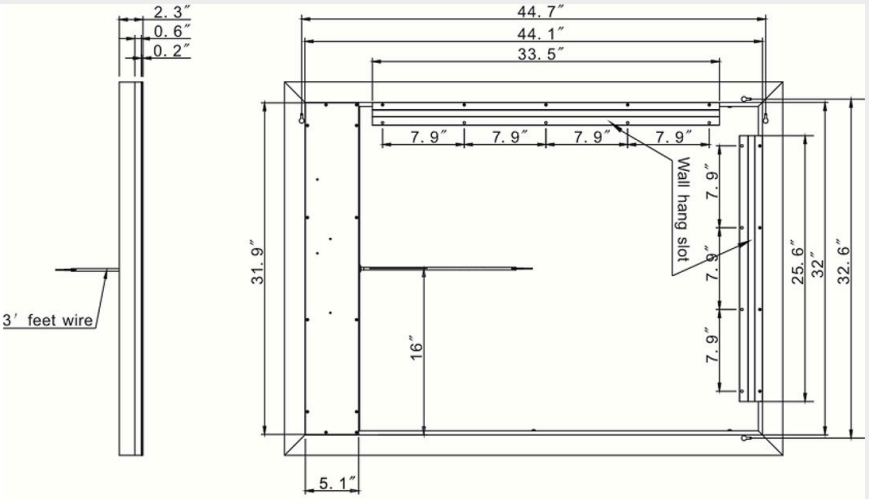

CÔTÉ / PROFIL & ARRIÈRE / BACK

LED RECTANGULAR FRONT-LIT MIRROR 48×36 TO 70×32 IN

LCMIR-FLOR



Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing

DIMENSIONS · 48 × 36 IN SIZE SHOWN

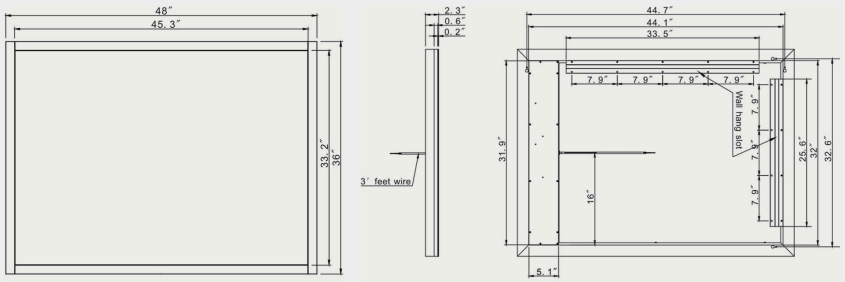

VUE DE FACE / FRONT VIEW

CÔTÉ / PROFIL & ARRIÈRE / BACK

FRONT-LIT LED MIRROR, 2 SIZES, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 2 sizes, from 48 × 36 in to 70 × 32 in. It delivers 7,620 to 9,180 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 7,620 to 9,180 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	65 to 76 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	7,620 to 9,180 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 36 · 70 × 32 in
Depth	2.3 in
Weight	55 to 71 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 48×36 TO 70×32 IN

LCMIR-FLOR

ORDERING

Build the product code

1 Series

`LCMIR-FLOR`

2 Size

`4836` 48 × 36 in
`7032` 70 × 32 in

3 Color

`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE **`LCMIR-FLOR` – `4836` – `60K`**
series · 48 × 36 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 36 in	`65 W`	`7,620 / 7,830 lm`	`55 lb`
70 × 32 in	`76 W`	`8,930 / 9,180 lm`	`71 lb`

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-FLOR-2432-60K`	Size: 24 × 32 in · 6000K
`LCMIR-FLOR-4836-30K`	Dimension : 48X36 · Color temperature : 3000K
`LCMIR-FLOR-4836-60K`	Dimension : 48X36 · Color temperature : 6000K
`LCMIR-FLOR-7032-30K`	Dimension : 70X32 · Color temperature : 3000K
`LCMIR-FLOR-7032-60K`	Dimension : 70X32 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED RECTANGULAR FRONT-LIT MIRROR 60×40 TO 100×45 IN

LCMIR-GALA





DIMENSIONS · 60 × 40 IN SIZE SHOWN

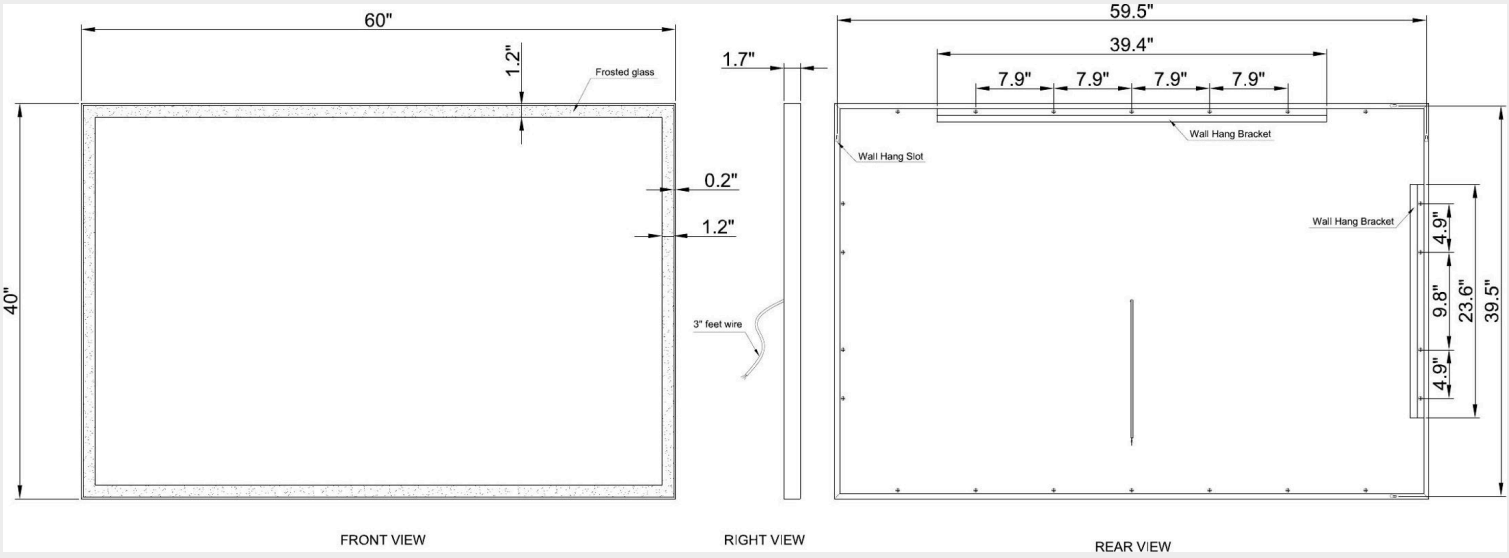


LED RECTANGULAR FRONT-LIT MIRROR 60×40 TO 100×45 IN

LCMIR-GALA





DIMENSIONS · 60 × 40 IN SIZE SHOWN

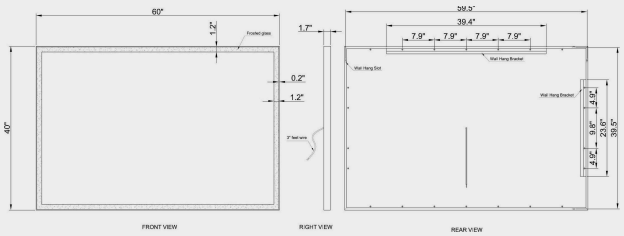

FRONT-LIT LED MIRROR, 6 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 6 sizes, from 60 × 40 in to 100 × 45 in. It delivers 8,280 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 7 other sizes (separate sheet): 24 × 36, 36 × 36, 40 × 36, 42 × 42, 48 × 28, 48 × 36, 55 × 36 in, 13 sizes in all.

FEATURES

- 8,280 to 12,860 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Powder-coated gray frame
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	70 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	8,280 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	60 × 40 · 60 × 45 · 65 × 28 · 70 × 32 · 85 × 40 · 100 × 45 in
Depth	1.7 in
Weight	50 to 117 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 60×40 TO 100×45 IN

LCMIR-GALA

ORDERING

Build the product code

1 Series

LCMIR-GALA

2 Size

6040 60 × 40 in
6045 60 × 45 in
6528 65 × 28 in
7032 70 × 32 in
8540 85 × 40 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-GALA** – **10045** – **30K**
series | 100 × 45 in | 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
60 × 40 in	76 W	9,188 lm	65 lb
60 × 45 in	90 W	8,960 / 9,920 lm	72 lb
65 × 28 in	70 W	8,280 / 8,510 lm	50 lb
70 × 32 in	76 W	9,188 lm	60 lb
85 × 40 in	98 W	10,890 / 10,910 lm	90 lb
100 × 45 in	116 W	12,830 / 12,860 lm	117 lb

LED RECTANGULAR FRONT-LIT MIRROR 60×40 TO 100×45 IN

LCMIR-GALA

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GALA-10045-30K	Size: 100 × 45 in · 3000K
LCMIR-GALA-10045-60K	Size: 100 × 45 in · 6000K
LCMIR-GALA-10045-CCT	Size: 100 × 45 in · Tunable white, remote (2700K-6000K)
LCMIR-GALA-10045-RGBW	Size: 100 × 45 in · Multicolor RGB
LCMIR-GALA-6040-30K	Size: 60 × 40 in · 3000K
LCMIR-GALA-6040-3CCT-TS	Size: 60 × 40 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-6040-60K	Size: 60 × 40 in · 6000K
LCMIR-GALA-6040-CCT	Size: 60 × 40 in · Tunable white, remote (2700K-6000K)
LCMIR-GALA-6040-RGBW	Size: 60 × 40 in · Multicolor RGB
LCMIR-GALA-6045-30K	Size: 60 × 45 in · 3000K
LCMIR-GALA-6045-3CCT-TS	Size: 60 × 45 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-6045-60K	Size: 60 × 45 in · 6000K
LCMIR-GALA-6045-RGBW	Size: 60 × 45 in · Multicolor RGB
LCMIR-GALA-6528-30K	Size: 65 × 28 in · 3000K
LCMIR-GALA-6528-3CCT-TS	Size: 65 × 28 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-6528-60K	Size: 65 × 28 in · 6000K
LCMIR-GALA-6528-CCT	Size: 65 × 28 in · Tunable white, remote (2700K-6000K)
LCMIR-GALA-6528-RGBW	Size: 65 × 28 in · Multicolor RGB
LCMIR-GALA-7032-30K	Size: 70 × 32 in · 3000K
LCMIR-GALA-7032-3CCT-TS	Size: 70 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-GALA-7032-60K	Size: 70 × 32 in · 6000K
LCMIR-GALA-7032-RGBW	Size: 70 × 32 in · Multicolor RGB
LCMIR-GALA-8540-30K	Size: 85 × 40 in · 3000K
LCMIR-GALA-8540-60K	Size: 85 × 40 in · 6000K
LCMIR-GALA-8540-CCT	Size: 85 × 40 in · Tunable white, remote (2700K-6000K)
LCMIR-GALA-8540-RGBW	Size: 85 × 40 in · Multicolor RGB

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED RECTANGULAR FRONT-LIT MIRROR 60×45 TO 100×45 IN

LCMIR-HAR





DIMENSIONS · 60 × 45 IN SIZE SHOWN

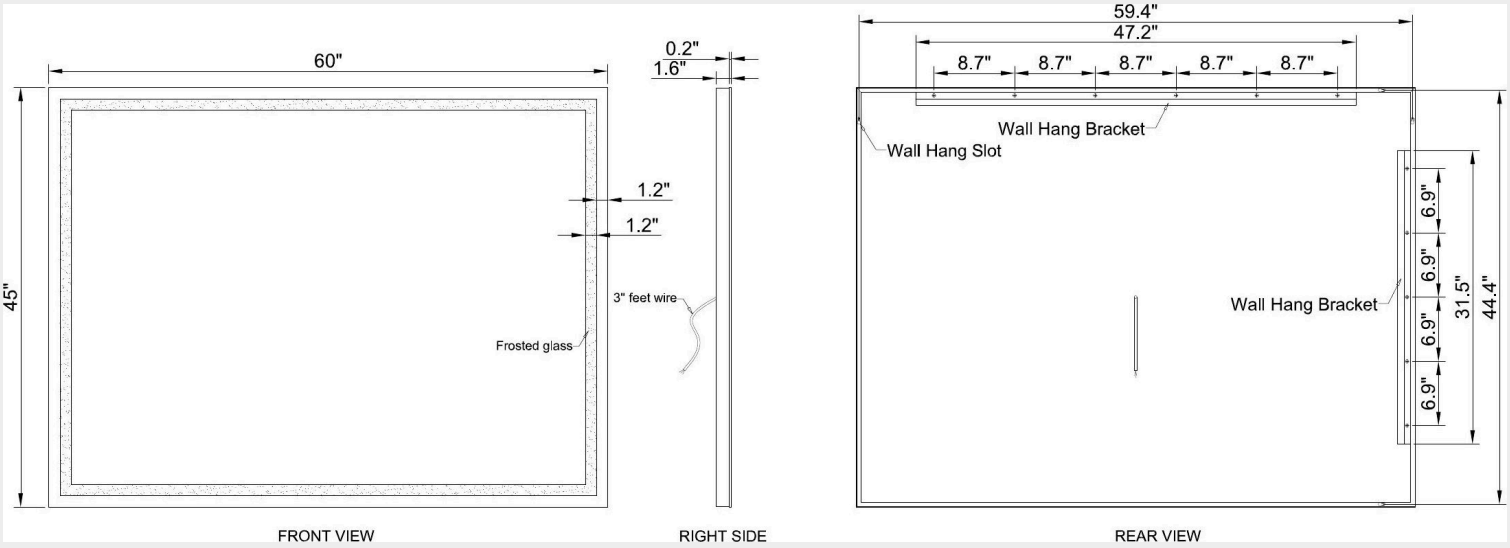


LED RECTANGULAR FRONT-LIT MIRROR 60×45 TO 100×45 IN

LCMIR-HAR





DIMENSIONS · 60 × 45 IN SIZE SHOWN

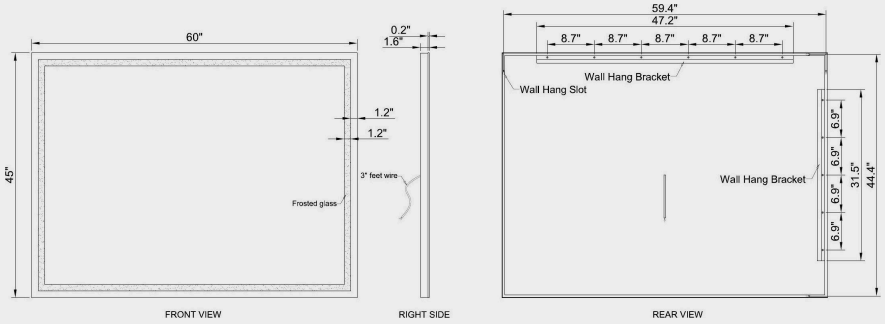

FRONT-LIT LED MIRROR, 5 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 5 sizes, from 60 × 45 in to 100 × 45 in. It delivers 8,930 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec. Also available in 13 other sizes (separate sheet): 20 × 26, 24 × 32, 30 × 42, 32 × 32, 36 × 36, 40 × 24, 40 × 35, 40 × 40, 48 × 24, 48 × 28, 48 × 35, 55 × 36, 60 × 28 in, 18 sizes in all.

FEATURES

- 8,930 to 12,860 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	76 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	8,930 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	60 × 45 · 70 × 32 · 70 × 45 · 85 × 40 · 100 × 45 in
Depth	1.6 · 2.0 in
Weight	59 to 117 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED RECTANGULAR FRONT-LIT MIRROR 60×45 TO 100×45 IN

LCMIR-HAR

ORDERING

Build the product code

1 Series

LCMIR-HAR

2 Size

6045 60 × 45 in
7032 70 × 32 in
7045 70 × 45 in
8540 85 × 40 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR** – **10045** – **30K**
series · 100 × 45 in · 3000K warm white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
60 × 45 in	76 W	8,930 / 9,180 lm	71 lb
70 × 32 in	76 W	9,188 lm	59 lb
70 × 45 in	90 W	9,920 / 9,940 lm	82 lb
85 × 40 in	98 W	10,890 / 10,910 lm	94 lb
100 × 45 in	116 W	12,830 / 12,860 lm	117 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-10045-30K	Size: 100 × 45 in · 3000K
LCMIR-HAR-10045-60K	Size: 100 × 45 in · 6000K
LCMIR-HAR-10045-CCT	Size: 100 × 45 in · Tunable white, remote (2700K-6000K)
LCMIR-HAR-10045-RGBW	Size: 100 × 45 in · Multicolor RGB
LCMIR-HAR-6045-30K	Size: 60 × 45 in · 3000K
LCMIR-HAR-6045-3CCT-TS	Size: 60 × 45 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-6045-60K	Size: 60 × 45 in · 6000K
LCMIR-HAR-6045-RGBW	Size: 60 × 45 in · Multicolor RGB
LCMIR-HAR-7032-30K	Size: 70 × 32 in · 3000K
LCMIR-HAR-7032-3CCT-TS	Size: 70 × 32 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-7032-60K	Size: 70 × 32 in · 6000K
LCMIR-HAR-7032-RGBW	Size: 70 × 32 in · Multicolor RGB
LCMIR-HAR-7045-30K	Size: 70 × 45 in · 3000K
LCMIR-HAR-7045-3CCT-TS	Size: 70 × 45 in · CCT touch button (3000K, 4000K, 6000K)
LCMIR-HAR-7045-60K	Size: 70 × 45 in · 6000K
LCMIR-HAR-7045-RGBW	Size: 70 × 45 in · Multicolor RGB
LCMIR-HAR-8540-30K	Size: 85 × 40 in · 3000K
LCMIR-HAR-8540-60K	Size: 85 × 40 in · 6000K
LCMIR-HAR-8540-CCT	Size: 85 × 40 in · Tunable white, remote (2700K-6000K)
LCMIR-HAR-8540-RGBW	Size: 85 × 40 in · Multicolor RGB

LED RECTANGULAR FRONT-LIT MIRROR 60×45 TO 100×45 IN


LCMIR-HAR

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED ROUND ANTI-FOG FRONT-LIT MIRROR 32×32 IN - 110 V

LCMIR-KIO



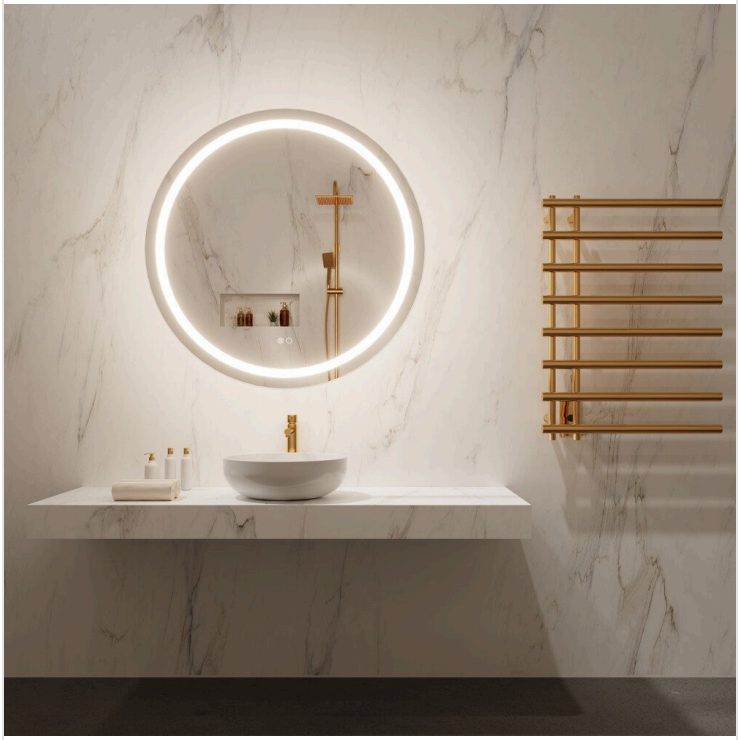


DIMENSIONS: 32 × 32 IN × 1 5/8 IN

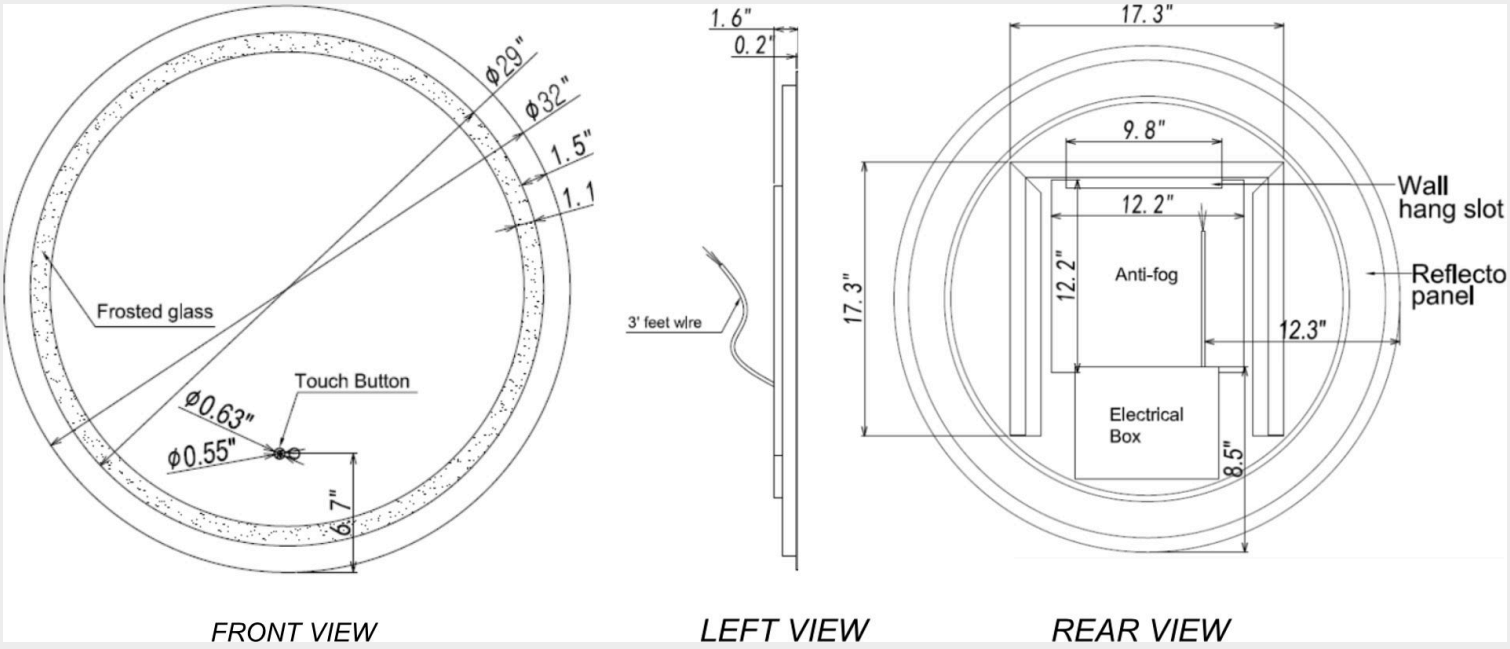


LED ROUND ANTI-FOG FRONT-LIT MIRROR 32×32 IN - 110 V

LCMIR-KIO



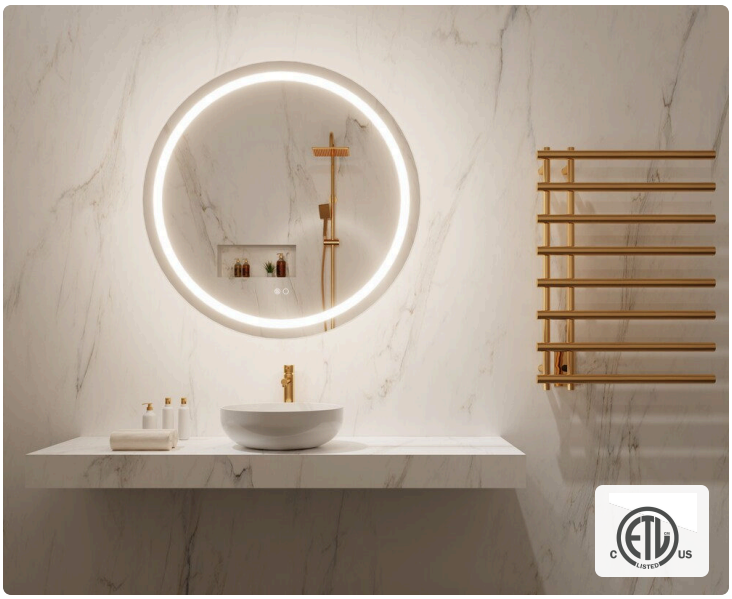

DIMENSIONS: 32 × 32 IN × 1 5/8 IN

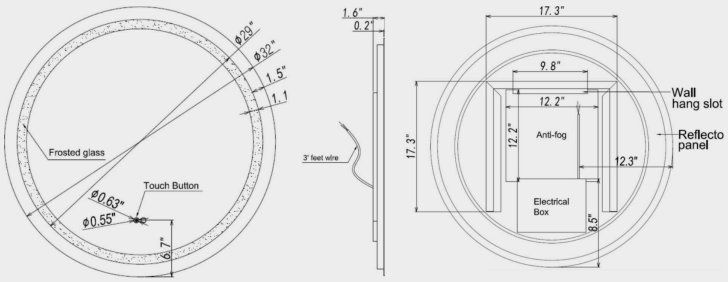

FRONT-LIT LED MIRROR WITH ANTI-FOG, 1 SIZE

Front-lit LED mirror with anti-fog for the bathroom, available in 32 × 32 in. It delivers 2,016 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,016 lm · CRI 90+
- Anti-fog on the left touch button
- 3 CCT by touch sensor
- IP44 · ETL certified
- 1 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	45 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,016 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	32 × 32 in
Depth	1 5/8 in
Weight	18 lb
Mounting	Horizontal or vertical
Warranty	1 year

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND ANTI-FOG FRONT-LIT MIRROR 32×32 IN - 110 V

LCMIR-KIO

ORDERING

Build the product code

1 Series

`LCMIR-KIO`

2 Size

3232 32 × 32 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-KIO` – `3232` – `3CCT-TS`

series | 32 × 32 in | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-KIO-3232-3CCT-TS`	Dimension : 32X32 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 32 × 32 in: 45 W, 2016 lm, 18 lb.
Left touch button: anti-fog (automatic shut-off after one hour). Right button: on / off, double tap to change the color, press and hold to dim.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED ROUND BACKLIT MIRROR 32×32 TO 48×48 IN - 110 V

LCMIR-ORIG-R





DIMENSIONS · 32 × 32 IN SIZE SHOWN

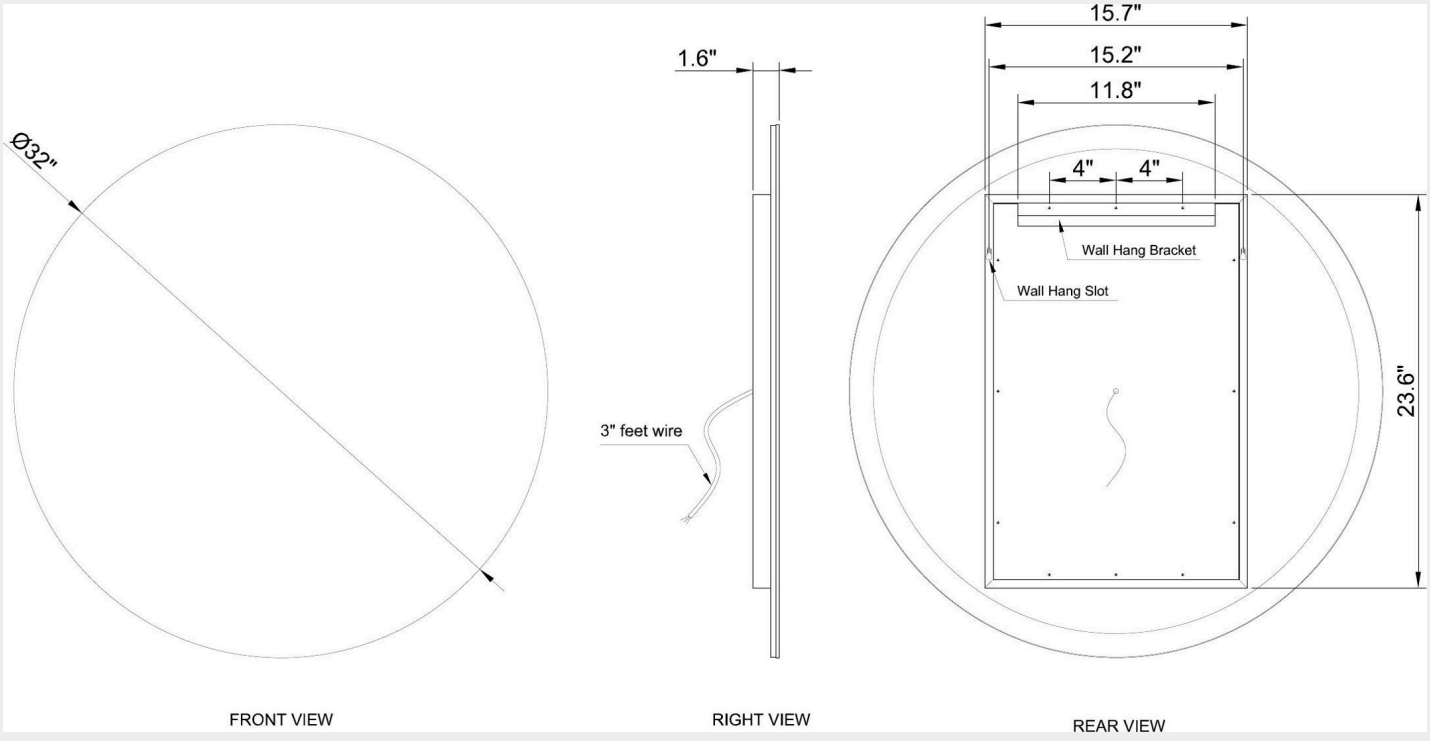


LED ROUND BACKLIT MIRROR 32×32 TO 48×48 IN - 110 V

LCMIR-ORIG-R





DIMENSIONS · 32 × 32 IN SIZE SHOWN

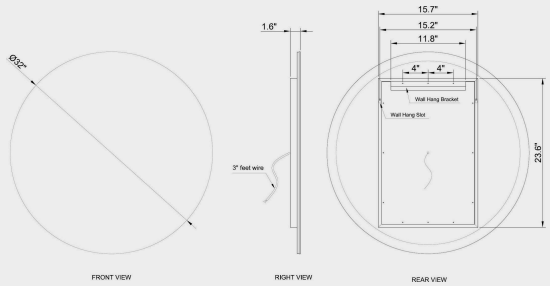

BACKLIT LED MIRROR, 3 SIZES, 5 LIGHT COLORS

Backlit LED mirror: the light spreads on the wall behind the mirror for the bathroom, available in 3 sizes, from 32 × 32 in to 48 × 48 in. It delivers 4,480 to 6,430 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,480 to 6,430 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 to 58 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	4,480 to 6,430 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	32 × 32 · 40 × 40 · 48 × 48 in
Depth	1.6 in
Weight	21 to 45 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND BACKLIT MIRROR 32×32 TO 48×48 IN - 110 V

LCMIR-ORIG-R

ORDERING

Build the product code

1 Series

LCMIR-ORIG-R

2 Size

3232 32 × 32 in
4040 40 × 40 in
4848 48 × 48 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-ORIG-R** – **3232** – **60K**
series | 32 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
32 × 32 in	**38 W**	**4,480 / 4,490 lm**	**21 lb**
40 × 40 in	**54 W**	**5,440 / 5,450 lm**	**30 lb**
48 × 48 in	**58 W**	**6,430 lm**	**45 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-ORIG-R-3232-30K	Dimension : 32X32 · Color temperature : 3000K
LCMIR-ORIG-R-3232-3CCT-TS	Dimension : 32X32 · Color temperature : 3CCT selectable
LCMIR-ORIG-R-3232-60K	Dimension : 32X32 · Color temperature : 6000K
LCMIR-ORIG-R-3232-RGBW	Dimension : 32X32 · Color temperature : RGBW
LCMIR-ORIG-R-4040-30K	Dimension : 40X40 · Color temperature : 3000K
LCMIR-ORIG-R-4040-3CCT-TS	Dimension : 40X40 · Color temperature : 3CCT selectable
LCMIR-ORIG-R-4040-60K	Dimension : 40X40 · Color temperature : 6000K
LCMIR-ORIG-R-4040-RGBW	Dimension : 40X40 · Color temperature : RGBW
LCMIR-ORIG-R-4848-30K	Dimension : 48X48 · Color temperature : 3000K
LCMIR-ORIG-R-4848-3CCT-TS	Dimension : 48X48 · Color temperature : 3CCT selectable
LCMIR-ORIG-R-4848-60K	Dimension : 48X48 · Color temperature : 6000K
LCMIR-ORIG-R-4848-CCT	Dimension : 48X48 · Color temperature : CCT ajustable
LCMIR-ORIG-R-4848-RGBW	Dimension : 48X48 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED ROUND FRONT-LIT MIRROR 32×32 IN 23 W - 110 V

LCMIR-LOOP





DIMENSIONS: 32 × 32 IN

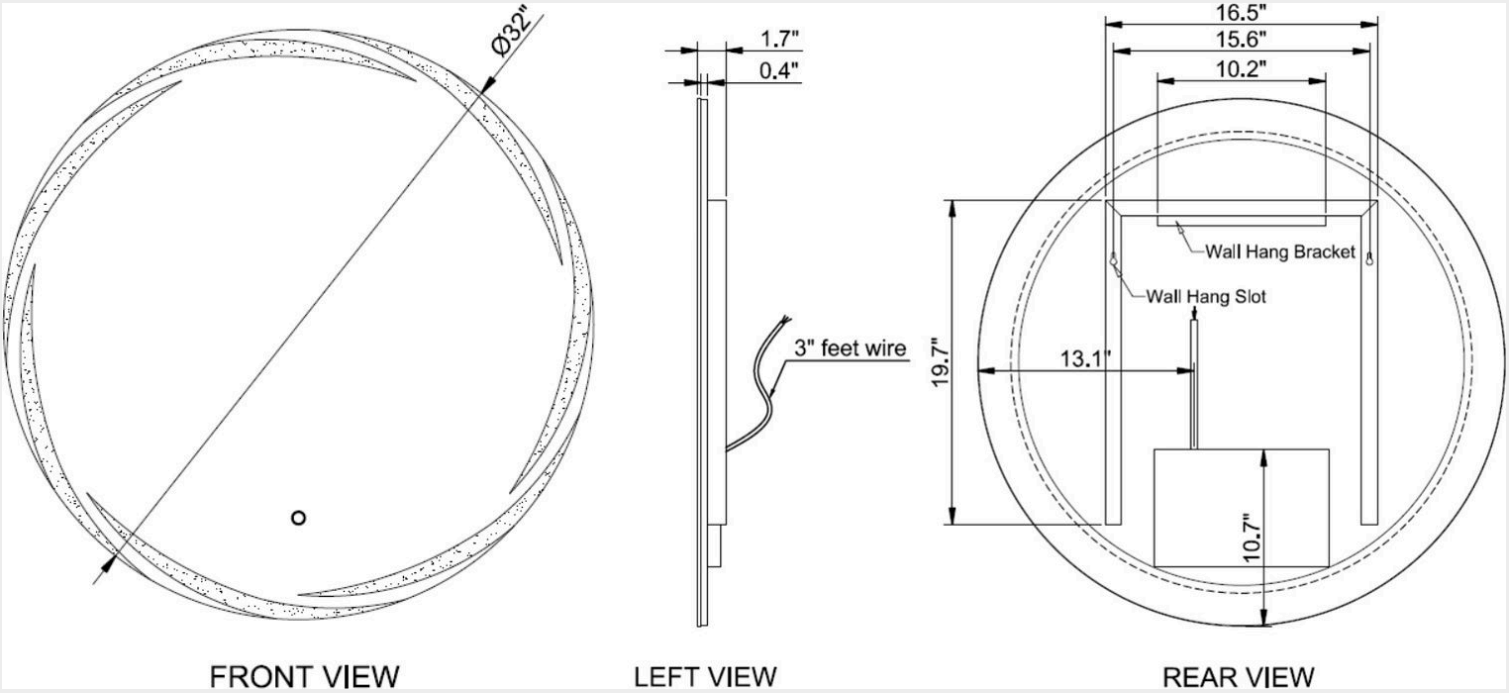

LED MIRRORS


LED ROUND FRONT-LIT MIRROR 32×32 IN 23 W - 110 V

LCMIR-LOOP





DIMENSIONS: 32 × 32 IN

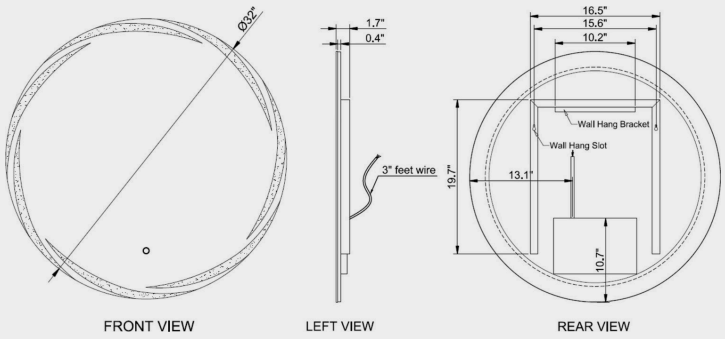

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 32 × 32 in. It delivers 3,200 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 3,200 lm · CRI 90+
- 3 CCT by touch sensor
- Front-lit with subtle backlighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	23 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	3,200 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	32 × 32 in
Weight	21.3 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND FRONT-LIT MIRROR 32×32 IN 23 W - 110 V

LCMIR-LOOP

ORDERING

Build the product code

1 Series
`LCMIR-LOOP`

2 Size
3232 32 × 32 in

3 Color
3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-LOOP` – `3232` – `3CCT-TS`
series | 32 × 32 in | 3000K / 4000K / 6000K by touch sensor

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-LOOP-3232-3CCT-TS`	Dimension : 32X32 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 32 × 32 in: 23 W, 3 200 lm, 21.3 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED ROUND FRONT-LIT MIRROR 36×36 TO 44×44 IN - 110 V

LCMIR-HAR-R





DIMENSIONS · 36 × 36 IN SIZE SHOWN

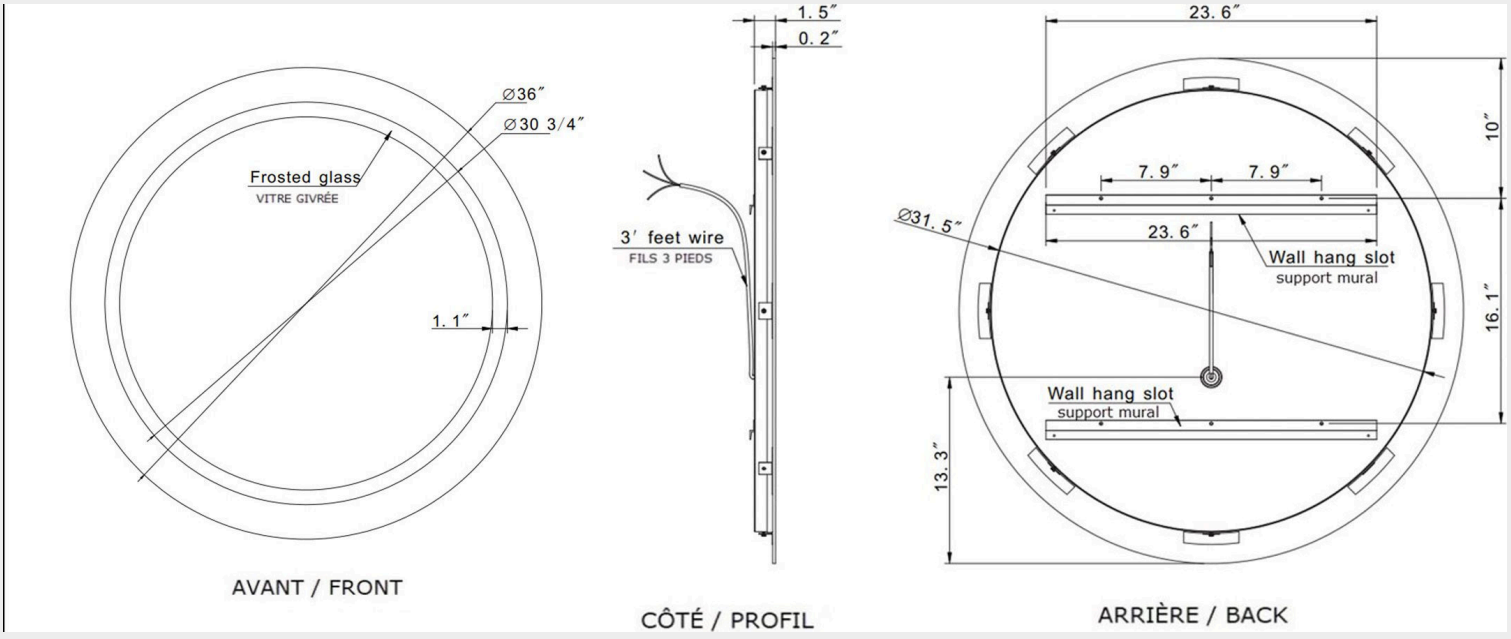


LED ROUND FRONT-LIT MIRROR 36×36 TO 44×44 IN - 110 V

LCMIR-HAR-R





DIMENSIONS · 36 × 36 IN SIZE SHOWN

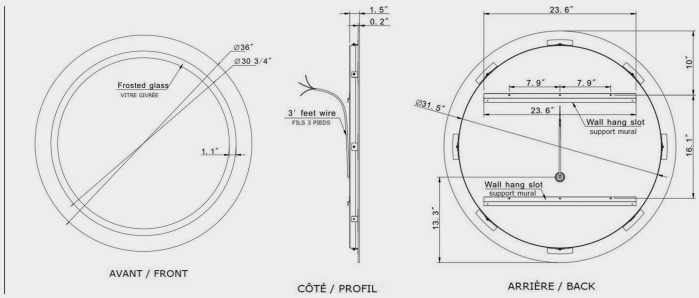

FRONT-LIT LED MIRROR, 2 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 2 sizes, from 36 × 36 in to 44 × 44 in. It delivers 4,140 to 5,450 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 4,140 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 to 60 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	4,140 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	36 × 36 · 44 × 44 in
Depth	1.6 in
Weight	28 to 42 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND FRONT-LIT MIRROR 36×36 TO 44×44 IN - 110 V

LCMIR-HAR-R

ORDERING

Build the product code

1 Series

LCMIR-HAR-R

2 Size

3636 36 × 36 in
4444 44 × 44 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR-R** – **3636** – **60K**
series · 36 × 36 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
36 × 36 in	38 W	4,140 / 4,250 lm	28 lb
44 × 44 in	60 W	5,440 / 5,450 lm	42 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HAR-R-3636-30K	Dimension : 36X36 · Color temperature : 3000K
LCMIR-HAR-R-3636-3CCT-TS	Dimension : 36X36 · Color temperature : 3CCT selectable
LCMIR-HAR-R-3636-60K	Dimension : 36X36 · Color temperature : 6000K
LCMIR-HAR-R-3636-RGBW	Dimension : 36X36 · Color temperature : RGBW
LCMIR-HAR-R-4444-30K	Dimension : 44X44 · Color temperature : 3000K
LCMIR-HAR-R-4444-60K	Dimension : 44X44 · Color temperature : 6000K
LCMIR-HAR-R-4444-CCT	Dimension : 44X44 · Color temperature : CCT ajustable
LCMIR-HAR-R-4444-RGBW	Dimension : 44X44 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED ROUND FRONT-LIT MIRROR 40×40 IN 50 W - 110 V

LCMIR-GALA-R





DIMENSIONS: 40 × 40 IN × 1.7 IN

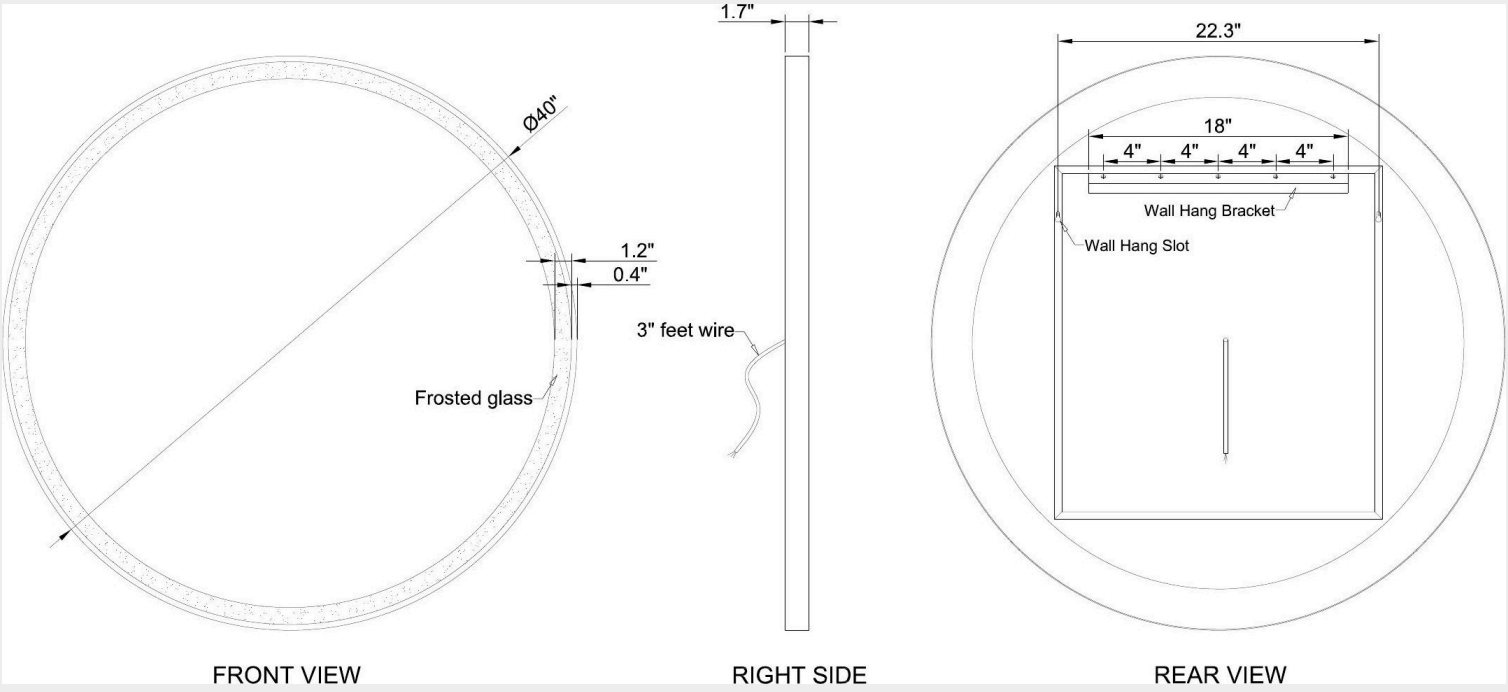


LED ROUND FRONT-LIT MIRROR 40×40 IN 50 W - 110 V

LCMIR-GALA-R





DIMENSIONS: 40 × 40 IN × 1.7 IN

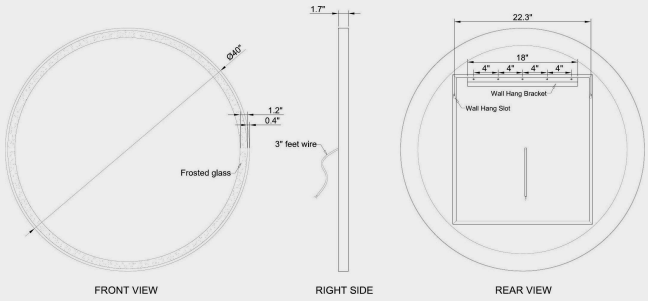

FRONT-LIT LED MIRROR, 1 SIZE, 4 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 40 × 40 in. It delivers 5,440 to 5,450 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 5,440 to 5,450 lm · CRI 90+
- 3000K · 6000K · 3 CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	50 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (RGBW)

OPTICAL

Luminous flux	5,440 to 5,450 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · RGBW
Lifespan	120,000 h

PHYSICAL

Size	40 × 40 in
Depth	1.7 in
Weight	32 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND FRONT-LIT MIRROR 40×40 IN 50 W - 110 V

LCMIR-GALA-R

ORDERING

Build the product code

1 Series

LCMIR-GALA-R

2 Size

4040 40 × 40 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-GALA-R** – **4040** – **60K**
series · 40 × 40 in · 6000K cool white

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GALA-R-4040-30K	Dimension : 40X40 · Dimension : 40X40 · Color temperature : 3000K · Color temperature : 3000K
LCMIR-GALA-R-4040-3CCT-TS	Dimension : 40X40 · Color temperature : 3CCT selectable
LCMIR-GALA-R-4040-60K	Dimension : 40X40 · Color temperature : 6000K
LCMIR-GALA-R-4040-RGBW	Dimension : 40X40 · Color temperature : RGBW

Per size (3000K / 6000K lumens when they differ) — 40 × 40 in: 50 W, 5440 / 5450 lm, 32 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; multicolor RGB: mood colors and white, by remote.

LED ROUND VANITY MIRROR WITH BULBS 28×28 IN - 120 V


LCMIR-DIA



TEMPÉRATURE DE COULEUR / *COLOR TEMPERATURE*

Température de couleur chaude (3000K) vs. froide (6000K).

Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing atmosphere

Image de comparaison. Ne représente pas le produit réel.
Comparison image. Does not represent actual product.

DIMENSIONS: 28 × 28 IN × 10 IN

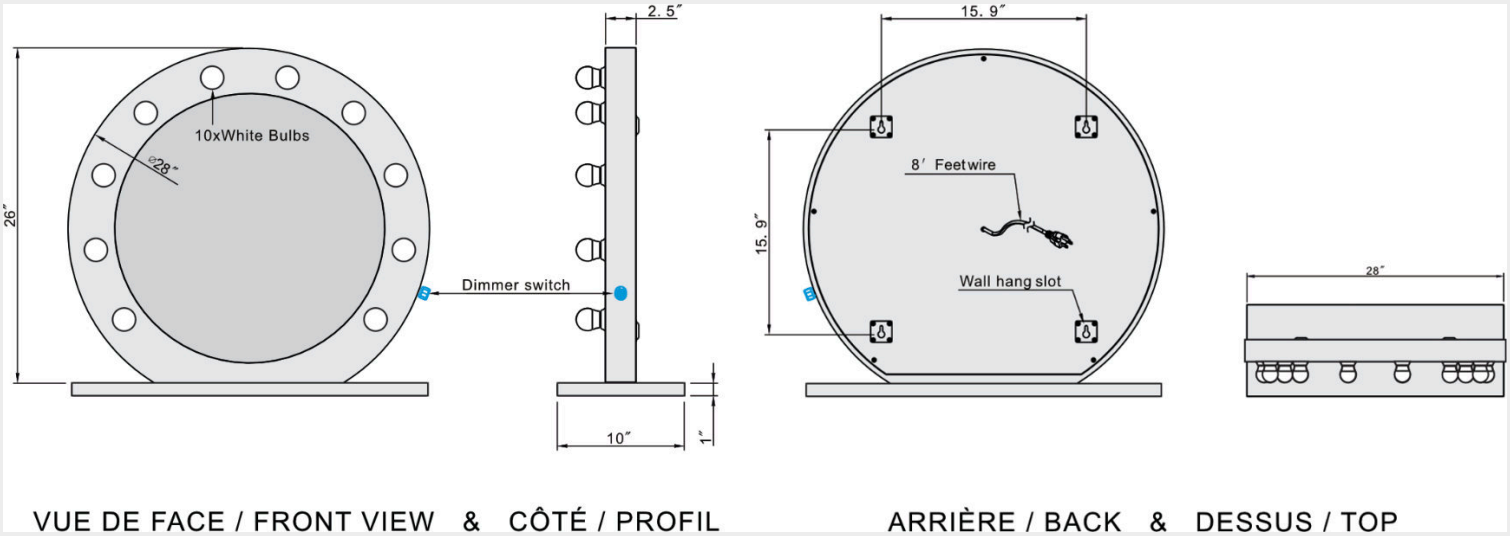


VUE DE FACE / FRONT VIEW & CÔTÉ / PROFIL

ARRIÈRE / BACK & DESSUS / TOP

LED ROUND VANITY MIRROR WITH BULBS 28×28 IN - 120 V

LCMIR-DIA

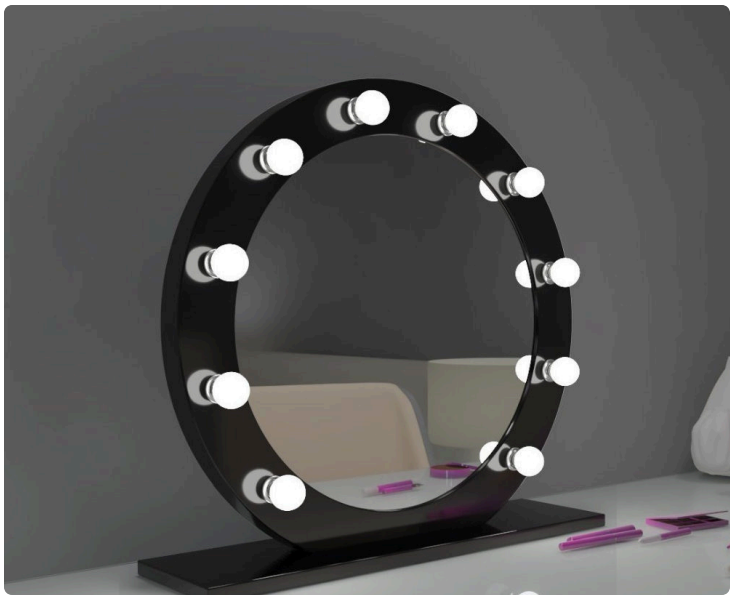

Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing

DIMENSIONS: 28 × 28 IN × 10 IN

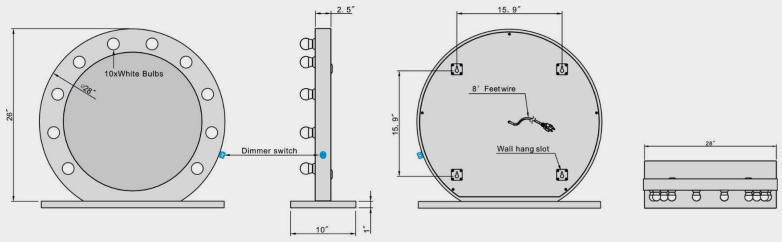

VUE DE FACE / FRONT VIEW & CÔTÉ / PROFIL

ARRIÈRE / BACK & DESSUS / TOP

LED VANITY MIRROR WITH BULBS, 1 SIZE, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 28 × 28 in. It delivers 2,700 to 3,200 lumens depending on size, with a CRI of 90+. Frame: black, pink, white. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,700 to 3,200 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- Frame: black · pink · white
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	30 W
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	2,700 to 3,200 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Size	28 × 28 in
Depth	10 in
Weight	22 lb
Mounting	Vertical only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED ROUND VANITY MIRROR WITH BULBS 28×28 IN - 120 V

LCMIR-DIA

ORDERING

Build the product code

1 Code

LCMIR-DIA-2828-30KBK
LCMIR-DIA-2828-30KP
LCMIR-DIA-2828-30KWH
LCMIR-DIA-2828-60KBK
LCMIR-DIA-2828-60KP
LCMIR-DIA-2828-60KWH

EXAMPLE **LCMIR-DIA-2828-60KBK**

example

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-DIA-2828-30KBK	Dimension : 28X28 · Color du cadre : Black · Color temperature : 3000K
LCMIR-DIA-2828-30KP	Dimension : 28X28 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-DIA-2828-30KWH	Dimension : 28X28 · Color du cadre : White · Color temperature : 3000K
LCMIR-DIA-2828-60KBK	Dimension : 28X28 · Color du cadre : Black · Color temperature : 6000K
LCMIR-DIA-2828-60KP	Dimension : 28X28 · Color du cadre : Rose · Color temperature : 6000K
LCMIR-DIA-2828-60KWH	Dimension : 28X28 · Color du cadre : White · Color temperature : 6000K

Per size (3000K / 6000K lumens when they differ) — 28 × 28 in: 30 W, 2700 / 3200 lm, 22 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED SQUARE RING-LIT FRONT-LIT MIRROR 28×28 TO 40×40 IN

LCMIR-HALO





DIMENSIONS · 28 × 28 IN SIZE SHOWN

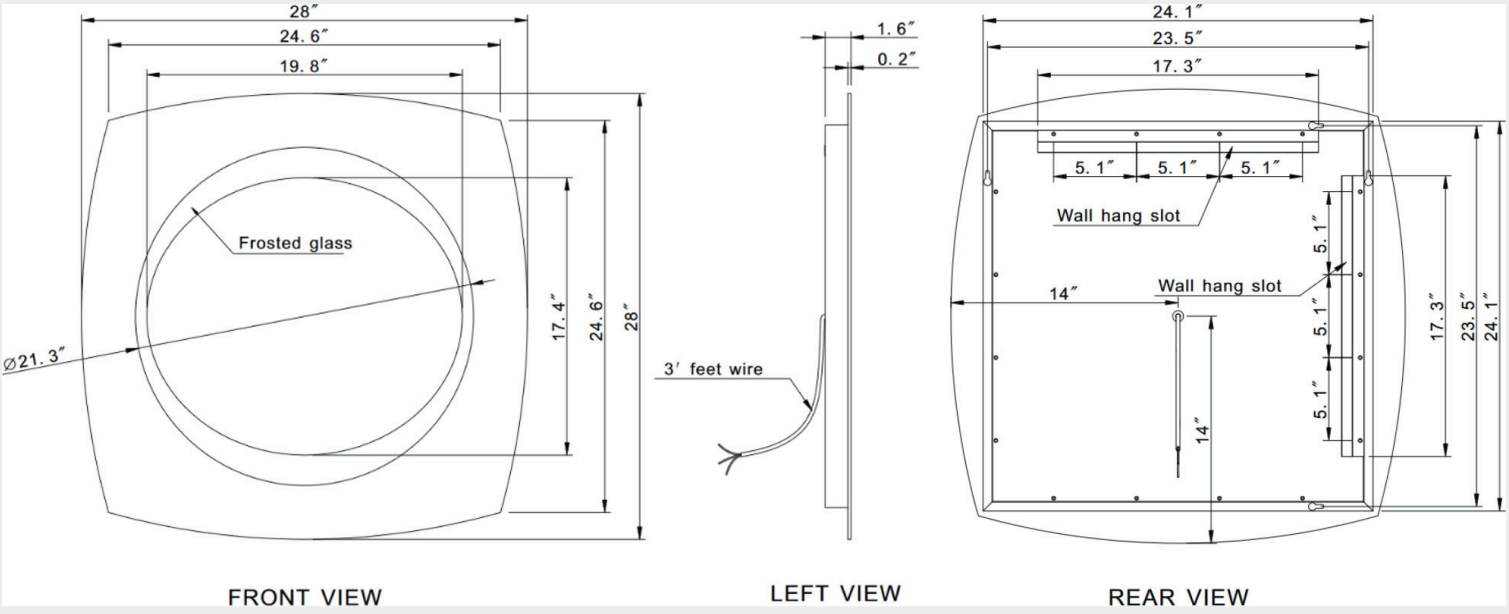


LED SQUARE RING-LIT FRONT-LIT MIRROR 28×28 TO 40×40 IN

LCMIR-HALO





DIMENSIONS · 28 × 28 IN SIZE SHOWN

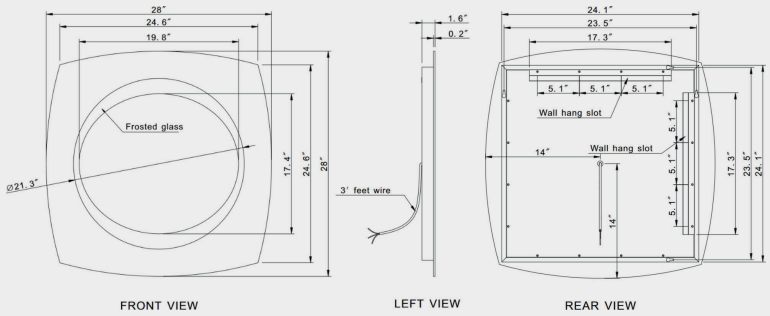

FRONT-LIT LED MIRROR, 2 SIZES, 2 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 2 sizes, from 28 × 28 in to 40 × 40 in. It delivers 3,100 to 4,590 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,100 to 4,590 lm · CRI 90+
- 3000K · 6000K
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	27 to 38 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K)

OPTICAL

Luminous flux	3,100 to 4,590 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	28 × 28 · 40 × 40 in
Depth	1.6 in
Weight	26 to 41 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED SQUARE RING-LIT FRONT-LIT MIRROR 28×28 TO 40×40 IN

LCMIR-HALO

ORDERING

Build the product code

1 Series

`LCMIR-HALO`

2 Size

`2828` 28 × 28 in
`4040` 40 × 40 in

3 Color

`30K` 3000K warm white
`60K` 6000K cool white

EXAMPLE `LCMIR-HALO` – `2828` – `60K`
series · 28 × 28 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
28 × 28 in	`27 W`	`3,100 / 3,190 lm`	`26 lb`
40 × 40 in	`38 W`	`4,460 / 4,590 lm`	`41 lb`

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-HALO-2828-30K`	Dimension : 28X28 · Color temperature : 3000K
`LCMIR-HALO-2828-60K`	Dimension : 28X28 · Color temperature : 6000K
`LCMIR-HALO-4040-30K`	Dimension : 40X40 · Color temperature : 3000K
`LCMIR-HALO-4040-60K`	Dimension : 40X40 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED STRIP-LIT FRONT-LIT MIRROR 24×32 TO 60×35 IN

LCMIR-VER





DIMENSIONS · 24 × 32 IN SIZE SHOWN

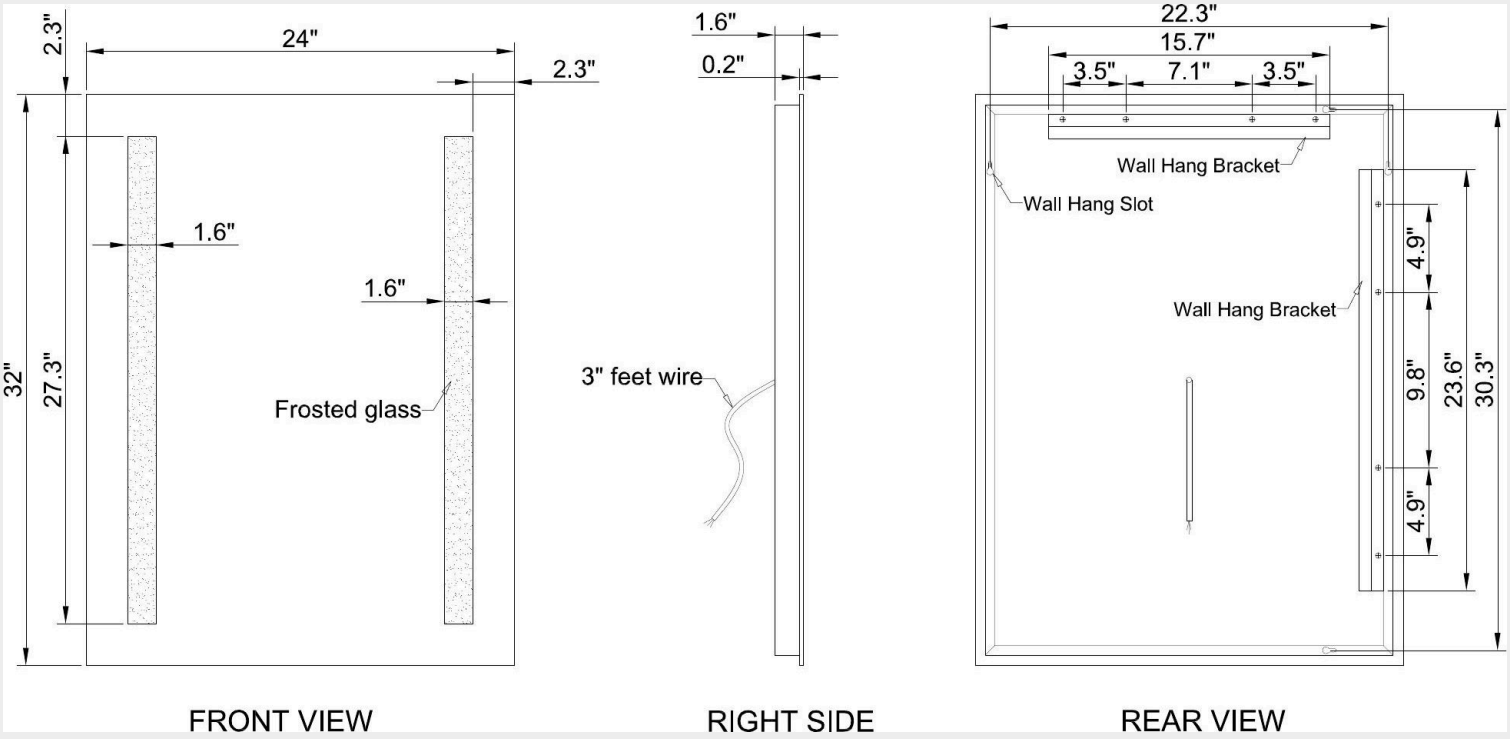


LED STRIP-LIT FRONT-LIT MIRROR 24×32 TO 60×35 IN

LCMIR-VER





DIMENSIONS · 24 × 32 IN SIZE SHOWN

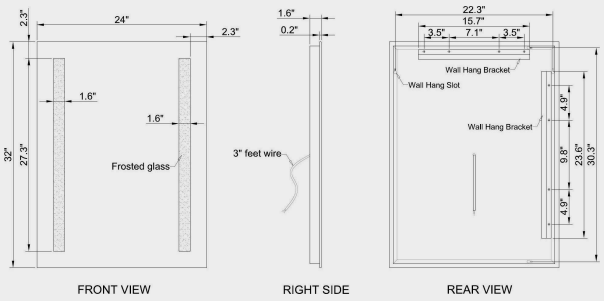

FRONT-LIT LED MIRROR, 4 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 4 sizes, from 24 × 32 in to 60 × 35 in. It delivers 3,100 to 6,600 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,100 to 6,600 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	24 to 50 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,100 to 6,600 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 32 · 32 × 48 · 48 × 28 · 60 × 35 in
Depth	1.6 in
Weight	21 to 60 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED STRIP-LIT FRONT-LIT MIRROR 24×32 TO 60×35 IN

LCMIR-VER

ORDERING

Build the product code

1 Series

LCMIR-VER

2 Size

2432 24 × 32 in
3248 32 × 48 in
4828 48 × 28 in
6035 60 × 35 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-VER** – **2432** – **60K**
series — 24 × 32 in — 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 32 in	**30 W**	**3,100 / 3,190 lm**	**21 lb**
32 × 48 in	**50 W**	**5,455 lm**	**40 lb**
48 × 28 in	**24 W**	**3,850 lm**	**40 lb**
60 × 35 in	**35 W**	**6,600 lm**	**60 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-VER-2432-30K	Dimension : 24X32 · Color temperature : 3000K
LCMIR-VER-2432-3CCT-TS	Dimension : 24X32 · Color temperature : 3CCT selectable
LCMIR-VER-2432-60K	Dimension : 24X32 · Color temperature : 6000K
LCMIR-VER-2432-RGBW	Dimension : 24X32 · Color temperature : RGBW
LCMIR-VER-3248-30K	Dimension : 32X48 · Color temperature : 3000K
LCMIR-VER-3248-3CCT-TS	Dimension : 32X48 · Color temperature : 3CCT selectable
LCMIR-VER-3248-60K	Dimension : 32X48 · Color temperature : 6000K
LCMIR-VER-3248-RGBW	Dimension : 32X48 · Color temperature : RGBW
LCMIR-VER-4828-30K	Dimension : 48X28 · Color temperature : 3000K
LCMIR-VER-4828-60K	Dimension : 48X28 · Color temperature : 6000K
LCMIR-VER-4828-CCT	Dimension : 48X28 · Color temperature : CCT ajustable
LCMIR-VER-4828-RGBW	Dimension : 48X28 · Color temperature : RGBW
LCMIR-VER-6035-30K	Dimension : 60X35 · Color temperature : 3000K
LCMIR-VER-6035-60K	Dimension : 60X35 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED STRIP-LIT FRONT-LIT MIRROR 24×36 TO 60×36 IN

LCMIR-GAL2





DIMENSIONS · 24 × 36 IN SIZE SHOWN

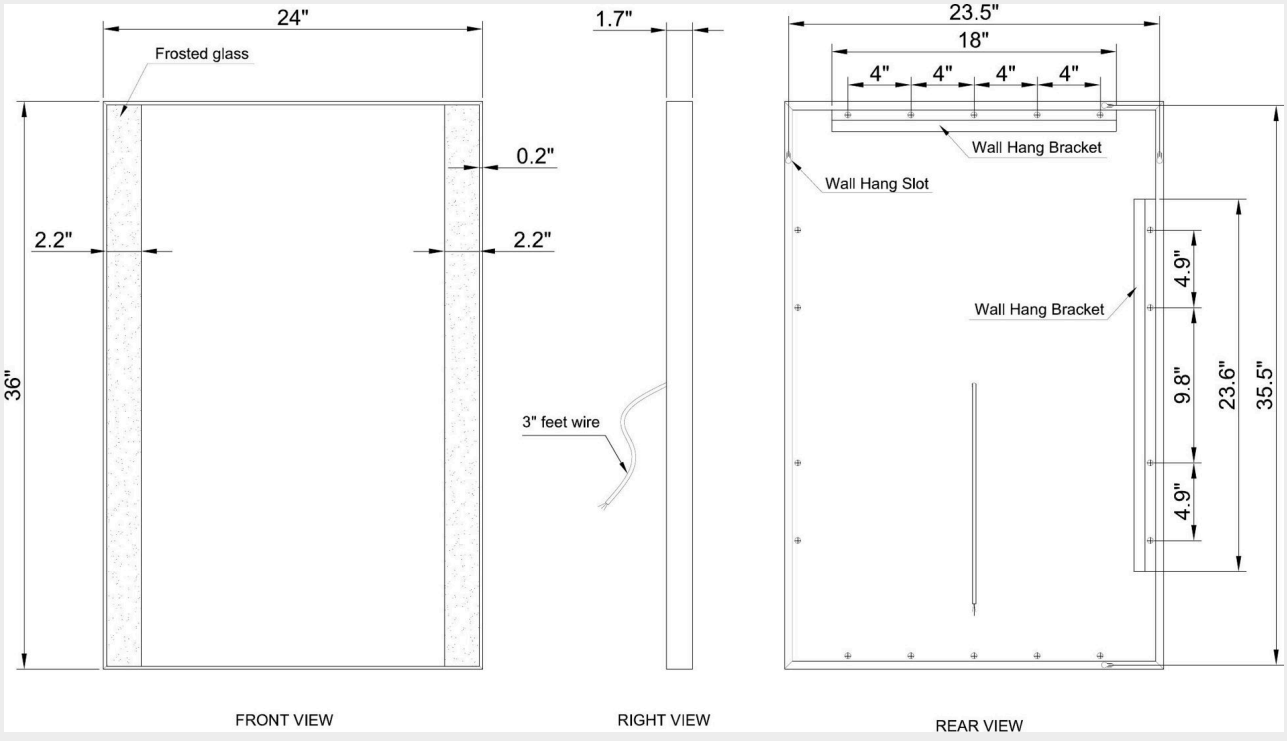


LED STRIP-LIT FRONT-LIT MIRROR 24×36 TO 60×36 IN

LCMIR-GAL2





DIMENSIONS · 24 × 36 IN SIZE SHOWN

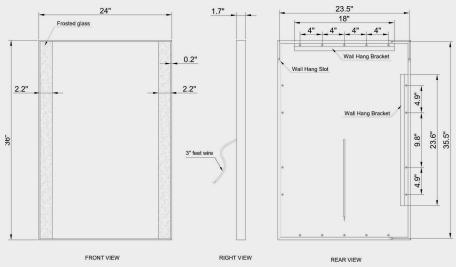

FRONT-LIT LED MIRROR, 3 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 3 sizes, from 24 × 36 in to 60 × 36 in. It delivers 3,450 to 5,940 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,450 to 5,940 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- Powder-coated gray frame
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	35 W
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,450 to 5,940 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 48 × 36 · 60 × 36 in
Depth	1.7 in
Weight	24 to 40 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED STRIP-LIT FRONT-LIT MIRROR 24×36 TO 60×36 IN

LCMIR-GAL2

ORDERING

Build the product code

1 Series

LCMIR-GAL2

2 Size

2436 24 × 36 in
4836 48 × 36 in
6036 60 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT 2700K to 6000K, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-GAL2** – **2436** – **60K**
series · 24 × 36 in · 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	**35 W**	**3,450 / 3,550 lm**	**24 lb**
48 × 36 in	**35 W**	**4,256 lm**	**35 lb**
60 × 36 in	**35 W**	**5,930 / 5,940 lm**	**40 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GAL2-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-GAL2-2436-3CCT-TS	Dimension : 24X36 · Color temperature : 3CCT selectable
LCMIR-GAL2-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-GAL2-2436-RGBW	Dimension : 24X36 · Color temperature : RGBW
LCMIR-GAL2-4836-30K	Dimension : 48X36 · Color temperature : 3000K
LCMIR-GAL2-4836-60K	Dimension : 48X36 · Color temperature : 6000K
LCMIR-GAL2-4836-CCT	Dimension : 48X36 · Color temperature : CCT ajustable
LCMIR-GAL2-4836-RGBW	Dimension : 48X36 · Color temperature : RGBW
LCMIR-GAL2-6036-30K	Dimension : 60X36 · Color temperature : 3000K
LCMIR-GAL2-6036-60K	Dimension : 60X36 · Color temperature : 6000K
LCMIR-GAL2-6036-CCT	Dimension : 60X36 · Color temperature : CCT ajustable
LCMIR-GAL2-6036-RGBW	Dimension : 60X36 · Color temperature : RGBW

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: 2700K to 6000K by remote; multicolor RGB: mood colors and white, by remote.


LED THREE-PANEL FRONT-LIT MIRROR 48×30 TO 60×30 IN

LCMIR-TRIF





DIMENSIONS · 48 × 30 IN SIZE SHOWN

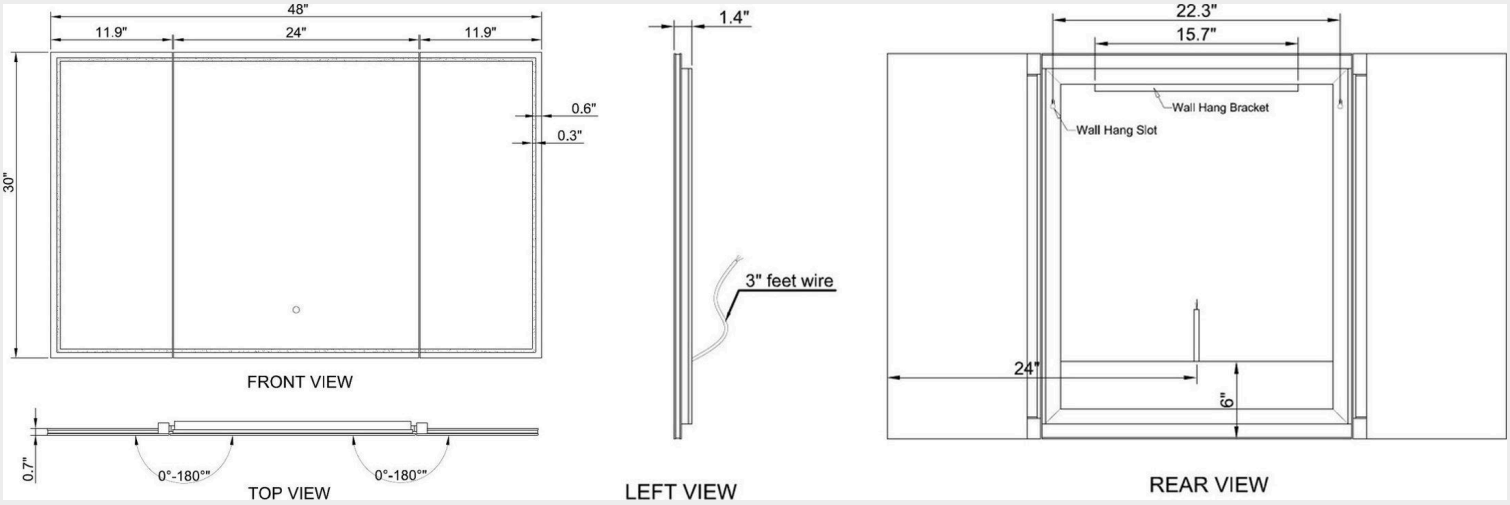


LED THREE-PANEL FRONT-LIT MIRROR 48×30 TO 60×30 IN

LCMIR-TRIF





DIMENSIONS · 48 × 30 IN SIZE SHOWN

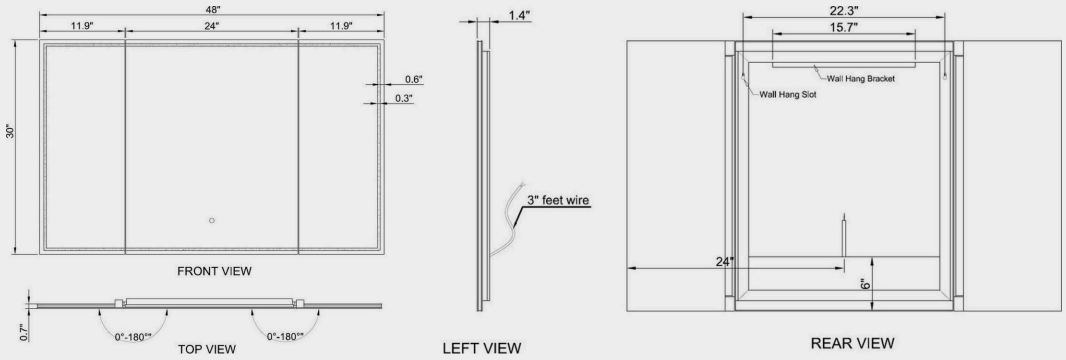

FRONT-LIT LED MIRROR, 2 SIZES

Front-lit LED mirror for the bathroom, available in 2 sizes, from 48 × 30 in to 60 × 30 in. It delivers 5,200 to 6,200 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 5,200 to 6,200 lm · CRI 90+
- 3 CCT by touch sensor
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	38 to 44 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	5,200 to 6,200 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 30 · 60 × 30 in
Weight	42 to 48 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED THREE-PANEL FRONT-LIT MIRROR 48×30 TO 60×30 IN

LCMIR-TRIF

ORDERING

Build the product code

1 Series

`LCMIR-TRIF`

2 Size

`4830` 48 × 30 in
`6030` 60 × 30 in

3 Color

`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-TRIF` – `4830` – `3CCT-TS`

series | 48 × 30 in | 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 30 in	`38 W`	`5,200 lm`	`42 lb`
60 × 30 in	`44 W`	`6,200 lm`	`48 lb`


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-TRIF-4830-3CCT-TS`	Dimension : 48X30 · Color temperature : 3CCT selectable
`LCMIR-TRIF-6030-3CCT-TS`	Dimension : 60X30 · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-GRA

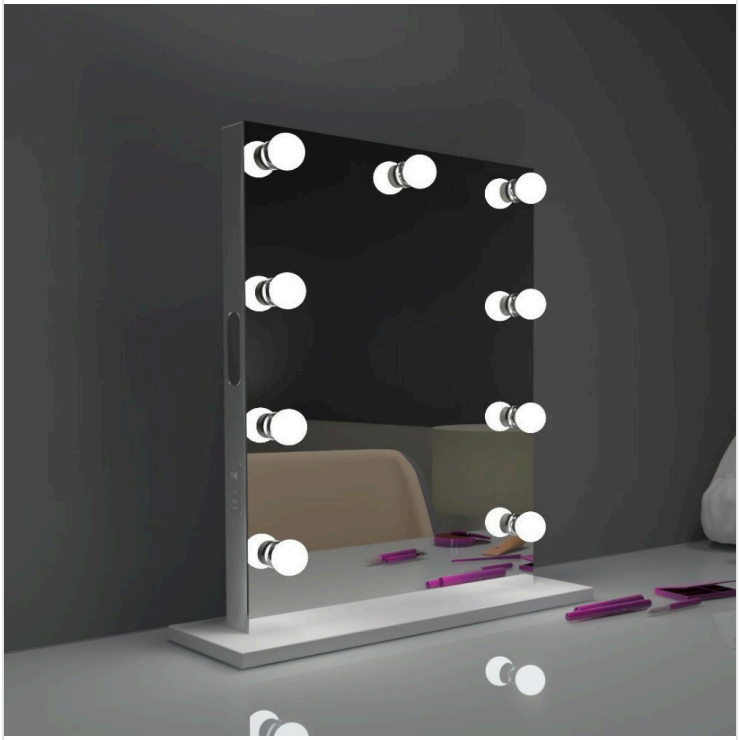

TEMPÉRATURE DE COULEUR / *COLOR TEMPERATURE*

Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing atmosphere


Image de comparaison. Ne représente pas le produit réel.
Comparison image. Does not represent actual product.

DIMENSIONS · 20 × 26 IN SIZE SHOWN

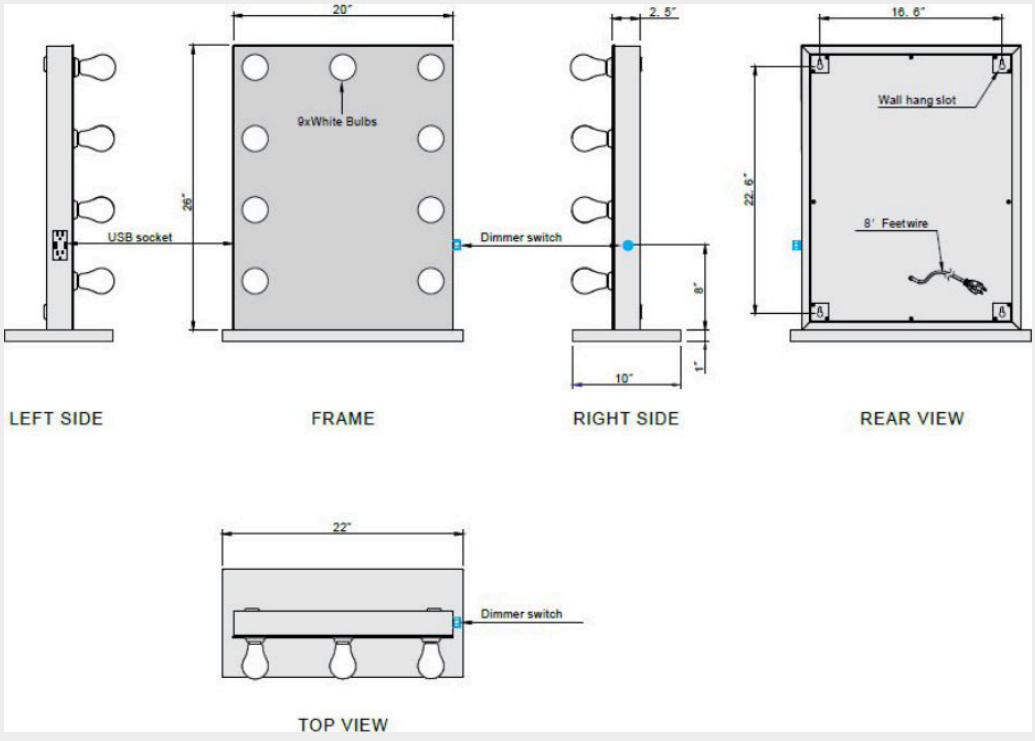

LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-GRA

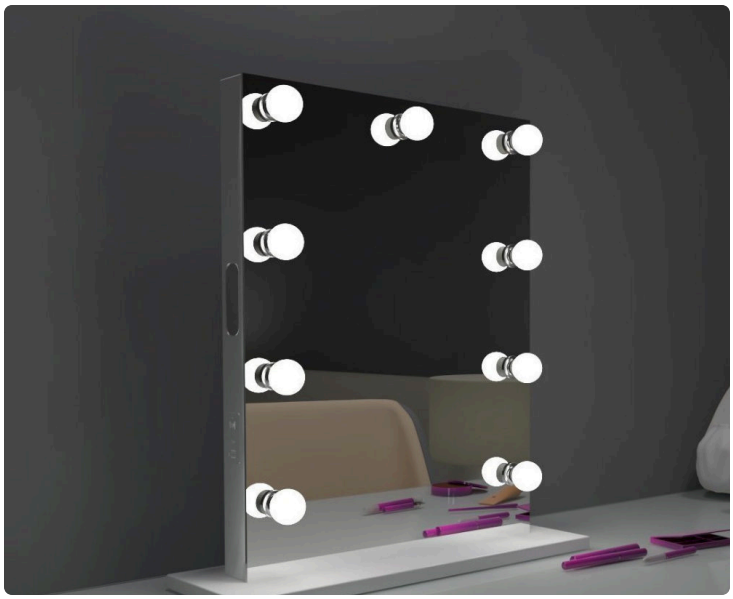

Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing

DIMENSIONS · 20 × 26 IN SIZE SHOWN

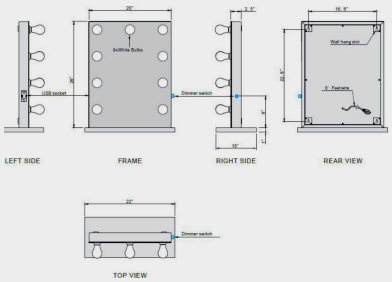

LED VANITY MIRROR WITH BULBS, 2 SIZES, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 2 sizes, from 20 × 26 in to 40 × 28 in. It delivers 2,430 to 3,840 lumens depending on size, with a CRI of 90+. Frame: white. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,430 to 3,840 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- Frame: white
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	27 to 36 W depending on size
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	2,430 to 3,840 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 26 · 40 × 28 in
Depth	10 in
Weight	38 to 70 lb
Mounting	Vertical only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-GRA

ORDERING

Build the product code

1 Code

LCMIR-GRA-2026-30KWH
LCMIR-GRA-2026-60KWH
LCMIR-GRA-4028-30KWH
LCMIR-GRA-4028-60KWH

EXAMPLE **LCMIR-GRA-2026-60KWH**
example

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 26 in	27 W	2,430 / 2,880 lm	38 lb
40 × 28 in	36 W	3,240 / 3,840 lm	70 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-GRA-2026-30KWH	Dimension : 20X26 · Color du cadre : White · Color temperature : 3000K
LCMIR-GRA-2026-60KWH	Dimension : 20X26 · Color du cadre : White · Color temperature : 6000K
LCMIR-GRA-4028-30KWH	Dimension : 40X28 · Color du cadre : White · Color temperature : 3000K
LCMIR-GRA-4028-60KWH	Dimension : 40X28 · Color du cadre : White · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-MARI



TEMPÉRATURE DE COULEUR / *COLOR TEMPERATURE*

Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing atmosphere

Image de comparaison. Ne représente pas le produit réel.
Comparison image. Does not represent actual product.

DIMENSIONS · 20 × 26 IN SIZE SHOWN

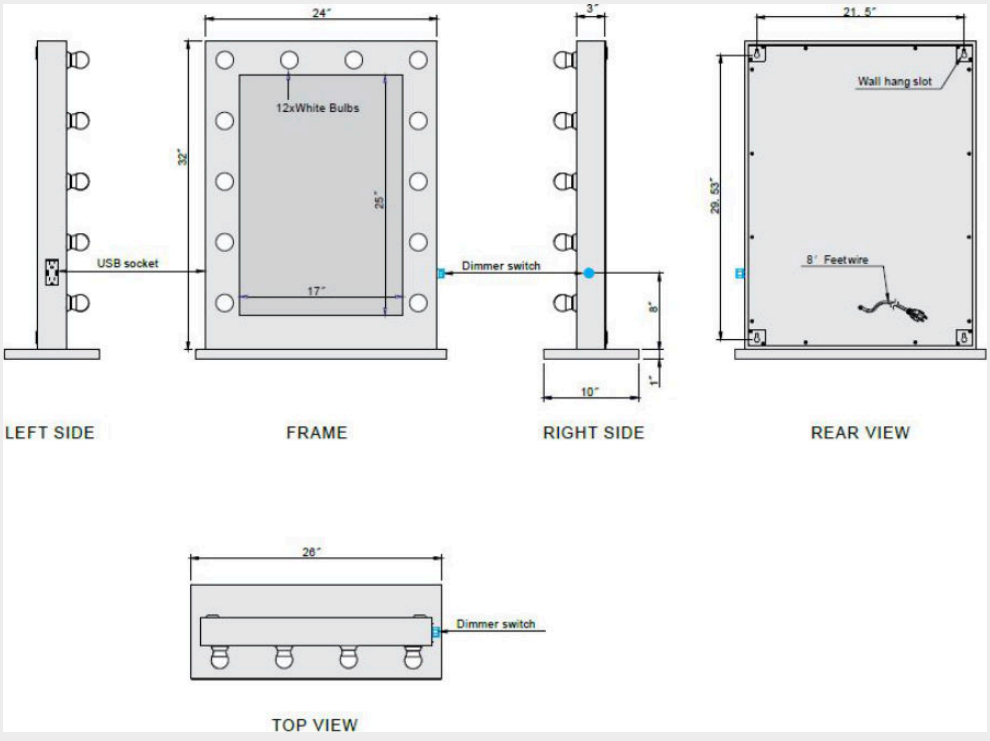

LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-MARI



Température de couleur chaude (3000K) vs. froide (6000K).
Warm (3000K) vs. cool (6000K) color temperature.



3000K

Lumière jaune chaude
Ambiance chaleureuse et détendue

Warm yellow light
Cozy relaxed environment




6000K

Lumière blanche froide
Atmosphère lumineuse et énergisante

Cool white light
Bright, energizing

c UL US

DIMENSIONS · 20 × 26 IN SIZE SHOWN

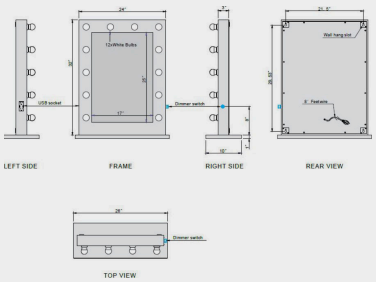

LED VANITY MIRROR WITH BULBS, 3 SIZES, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 3 sizes, from 20 × 26 in to 40 × 28 in. It delivers 2,430 to 3,840 lumens depending on size, with a CRI of 90+. Frame: black, pink, white. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,430 to 3,840 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- Frame: black · pink · white
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	27 to 36 W depending on size
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	2,430 to 3,840 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	20 × 26 · 24 × 32 · 40 × 28 in
Depth	10 in
Weight	28 to 55 lb
Mounting	Vertical only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED VANITY MIRROR WITH BULBS 20×26 TO 40×28 IN - 120 V

LCMIR-MARI

ORDERING

Build the product code

1 Code

LCMIR-MARI-2026-30K-BK
LCMIR-MARI-2026-30K-PK
LCMIR-MARI-2026-30K-WH
LCMIR-MARI-2026-60KB
LCMIR-MARI-2026-60KP
LCMIR-MARI-2026-60KW
LCMIR-MARI-2432-30K-BK
LCMIR-MARI-2432-30K-PK

EXAMPLE **LCMIR-MARI-2026-60KB**
example

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 26 in	27 W	2,430 / 2,880 lm	28 lb
24 × 32 in	36 W	3,240 / 3,840 lm	39 lb
40 × 28 in	36 W	3,240 / 3,840 lm	55 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-MARI-2026-30K-BK	Dimension : 20X26 · Color du cadre : Black · Color temperature : 3000K
LCMIR-MARI-2026-30K-PK	Dimension : 20X26 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-MARI-2026-30K-WH	Dimension : 20X26 · Color du cadre : White · Color temperature : 3000K
LCMIR-MARI-2026-60KB	Dimension : 20X26 · Color du cadre : Black · Color temperature : 6000K
LCMIR-MARI-2026-60KP	Dimension : 20X26 · Color du cadre : Rose · Color temperature : 6000K
LCMIR-MARI-2026-60KW	Dimension : 20X26 · Color du cadre : White · Color temperature : 6000K
LCMIR-MARI-2432-30K-BK	Dimension : 24X32 · Color du cadre : Black · Color temperature : 3000K
LCMIR-MARI-2432-30K-PK	Dimension : 24X32 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-MARI-2432-30K-WH	Dimension : 24X32 · Color du cadre : White · Color temperature : 3000K
LCMIR-MARI-2432-60KB	Dimension : 24X32 · Color du cadre : Black · Color temperature : 6000K
LCMIR-MARI-2432-60KP	Dimension : 24X32 · Color du cadre : Rose · Color temperature : 6000K
LCMIR-MARI-2432-60KW	Dimension : 24X32 · Color du cadre : White · Color temperature : 6000K
LCMIR-MARI-4028-30K-PK	Dimension : 40X28 · Color du cadre : Rose · Color temperature : 3000K
LCMIR-MARI-4028-60K-PK	Dimension : 40X28 · Color du cadre : Rose · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED VANITY MIRROR WITH BULBS 24×36 TO 60×36 IN - 120 V

LCMIR-HOL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

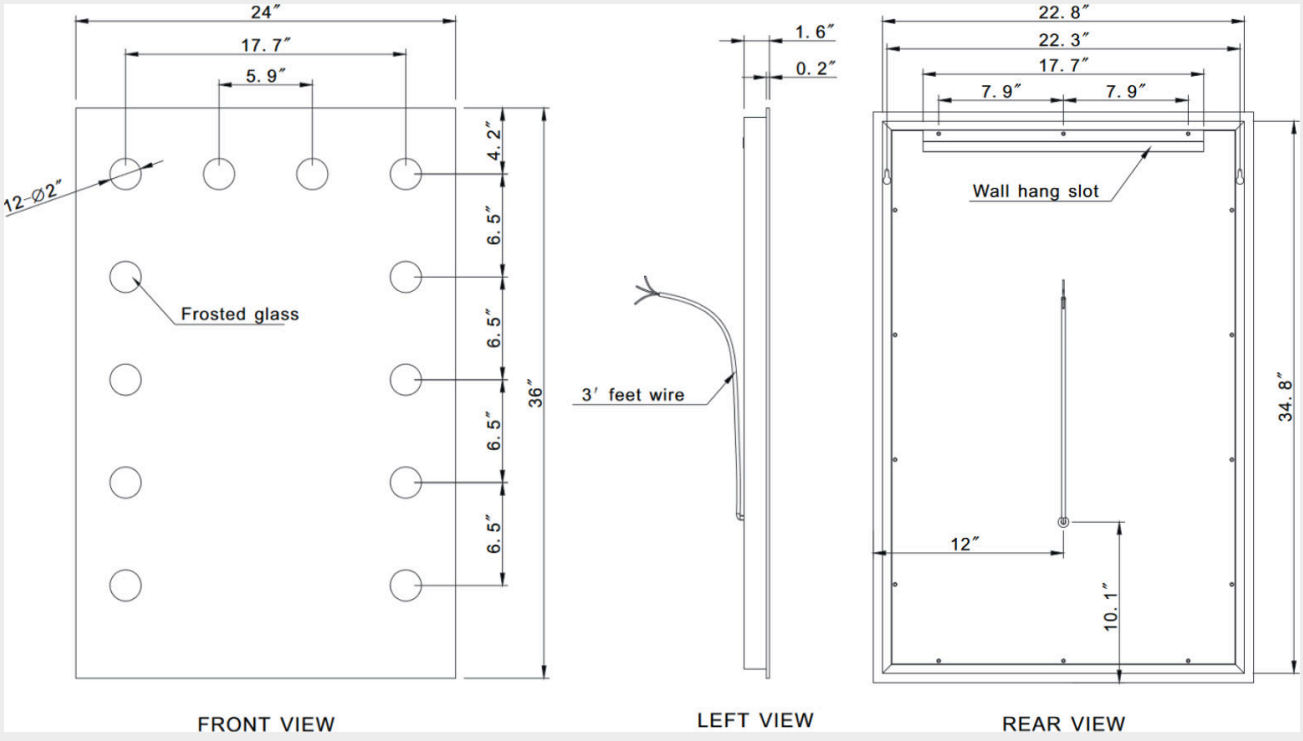


LED VANITY MIRROR WITH BULBS 24×36 TO 60×36 IN - 120 V

LCMIR-HOL





DIMENSIONS · 24 × 36 IN SIZE SHOWN

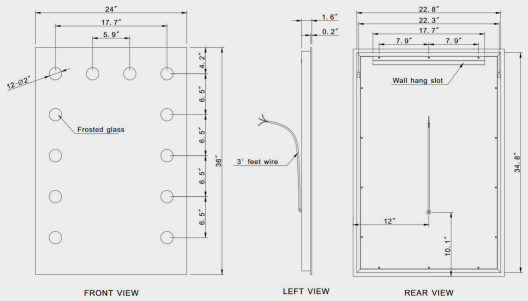

LED VANITY MIRROR WITH BULBS, 3 SIZES, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 3 sizes, from 24 × 36 in to 60 × 36 in. It delivers 3,450 to 4,970 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,450 to 4,970 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	120 V AC, hard-wired
Power	29 to 45 W depending on size
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	3,450 to 4,970 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	24 × 36 · 48 × 36 · 60 × 36 in
Depth	1.6 in
Weight	29 to 62 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED VANITY MIRROR WITH BULBS 24×36 TO 60×36 IN - 120 V

LCMIR-HOL

ORDERING

Build the product code

1 Series

LCMIR-HOL

2 Size

2436 24 × 36 in
4836 48 × 36 in
6036 60 × 36 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-HOL** – **2436** – **60K**
series | 24 × 36 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
24 × 36 in	**29 W**	**3,450 / 3,550 lm**	**29 lb**
48 × 36 in	**35 W**	**4,140 / 4,250 lm**	**51 lb**
60 × 36 in	**45 W**	**4,960 / 4,970 lm**	**62 lb**

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-HOL-2436-30K	Dimension : 24X36 · Color temperature : 3000K
LCMIR-HOL-2436-60K	Dimension : 24X36 · Color temperature : 6000K
LCMIR-HOL-4836-30K	Dimension : 48X36 · Color temperature : 3000K
LCMIR-HOL-4836-60K	Dimension : 48X36 · Color temperature : 6000K
LCMIR-HOL-6036-30K	Dimension : 60X36 · Color temperature : 3000K
LCMIR-HOL-6036-60K	Dimension : 60X36 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED VANITY MIRROR WITH BULBS 32×24 TO 85×40 IN - 110 V

LCMIR-PRINC





DIMENSIONS · 32 × 24 IN SIZE SHOWN

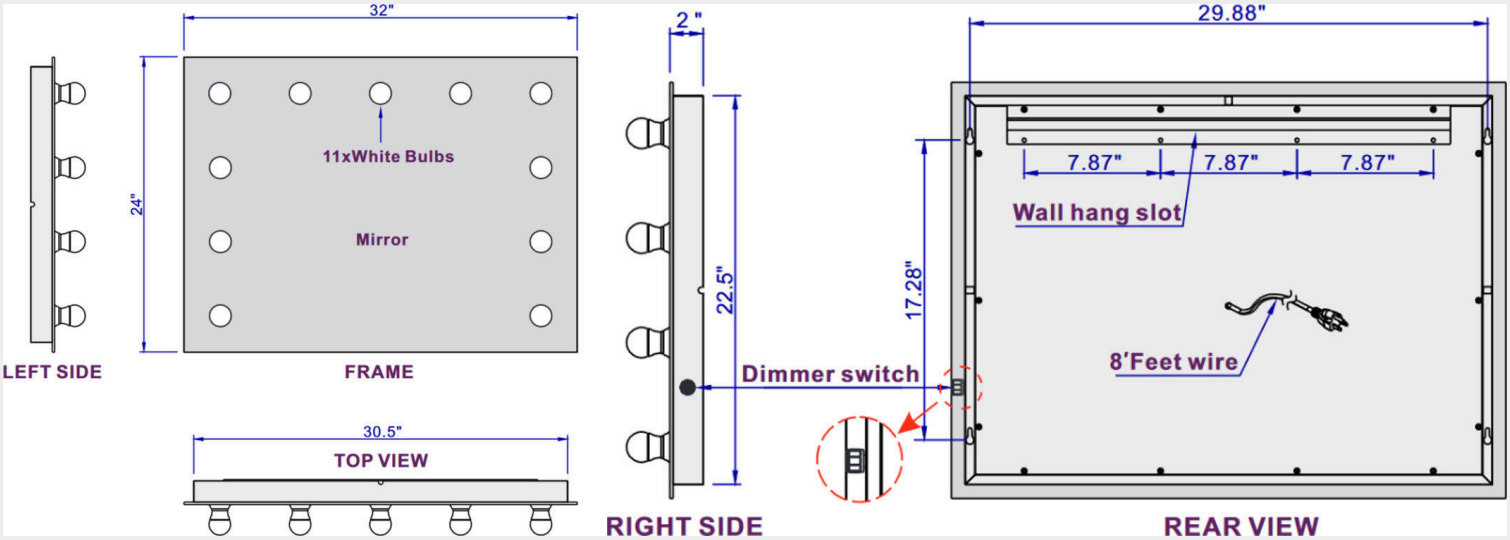


LED VANITY MIRROR WITH BULBS 32×24 TO 85×40 IN - 110 V

LCMIR-PRINC





DIMENSIONS · 32 × 24 IN SIZE SHOWN

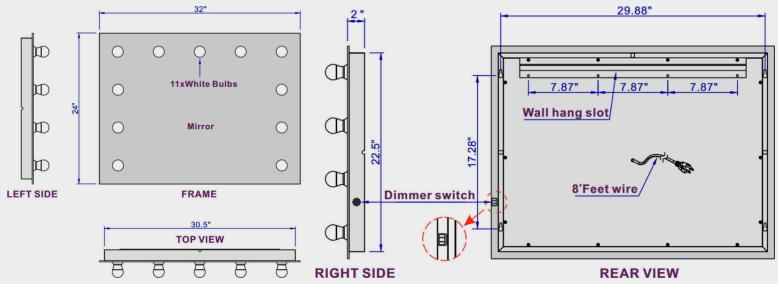

LED VANITY MIRROR WITH BULBS, 4 SIZES, 2 LIGHT COLORS

LED vanity mirror with bulbs for the bathroom, available in 4 sizes, from 32 × 24 in to 85 × 40 in. It delivers 2,970 to 10,240 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 2,970 to 10,240 lm · CRI 90+
- 3000K · 6000K
- Dimmable: dimmer switch on the mirror
- 24 V LED bulbs
- Integrated dimmer switch
- IP44 · cULus certified

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	33 to 96 W depending on size
Control	dimmer switch on the mirror

OPTICAL

Luminous flux	2,970 to 10,240 lm depending on size
CRI	90+
Color	30K · 60K
Lifespan	120,000 h

PHYSICAL

Sizes	32 × 24 · 48 × 36 · 60 × 45 · 85 × 40 in
Depth	2 in
Weight	37 to 90 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED VANITY MIRROR WITH BULBS 32×24 TO 85×40 IN - 110 V

LCMIR-PRINC

ORDERING

Build the product code

1 Series

LCMIR-PRINC

2 Size

3224 32 × 24 in
4836 48 × 36 in
6045 60 × 45 in
8540 85 × 40 in

3 Color

30K 3000K warm white
60K 6000K cool white

EXAMPLE **LCMIR-PRINC** – **3224** – **60K**
series | 32 × 24 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
32 × 24 in	33 W	2,970 / 3,520 lm	37 lb
48 × 36 in	72 W	6,480 / 7,680 lm	52 lb
60 × 45 in	90 W	8,100 / 9,600 lm	72 lb
85 × 40 in	96 W	8,640 / 10,240 lm	90 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-PRINC-3224-60K	Dimension : 32X24 · Color temperature : 6000K
LCMIR-PRINC-4828-60K	Size: 48 × 28 in · 6000K
LCMIR-PRINC-4836-30K	Dimension : 48X36 · Color temperature : 3000K
LCMIR-PRINC-4836-60K	Dimension : 48X36 · Color temperature : 6000K
LCMIR-PRINC-6045-30K	Dimension : 60X45 · Color temperature : 3000K
LCMIR-PRINC-6045-60K	Dimension : 60X45 · Color temperature : 6000K
LCMIR-PRINC-8540-30K	Dimension : 85X40 · Color temperature : 3000K
LCMIR-PRINC-8540-60K	Dimension : 85X40 · Color temperature : 6000K

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white.


LED WITH SHELF AND CHARGER MIRROR 48×28 TO 70×32 IN

LCMIR-LINEA





DIMENSIONS · 48 × 28 IN SIZE SHOWN

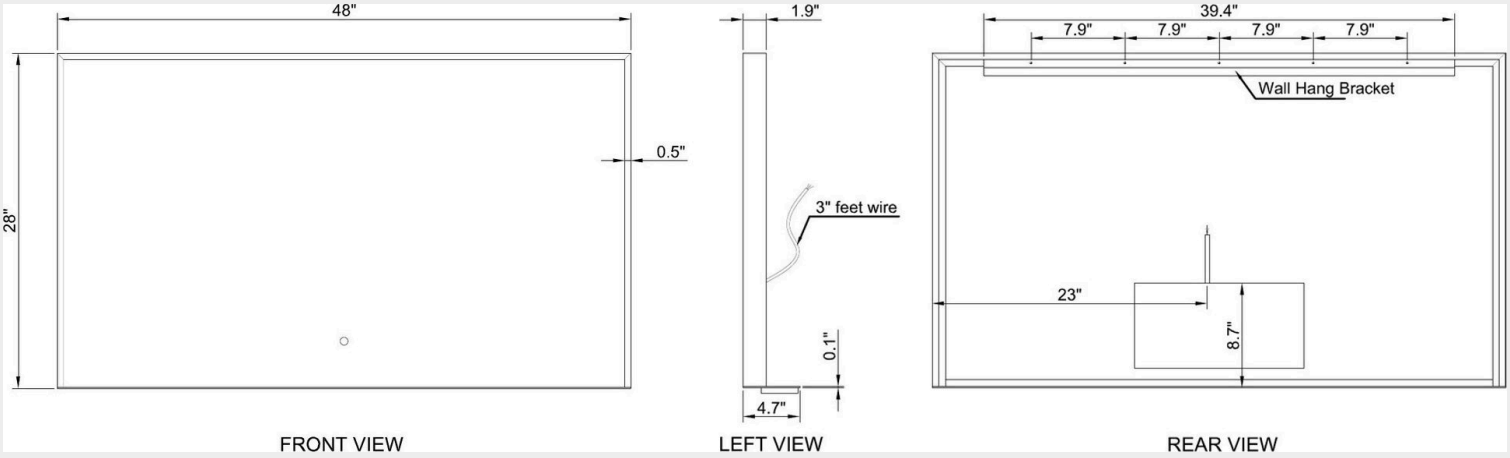


LED WITH SHELF AND CHARGER MIRROR 48×28 TO 70×32 IN

LCMIR-LINEA





DIMENSIONS · 48 × 28 IN SIZE SHOWN

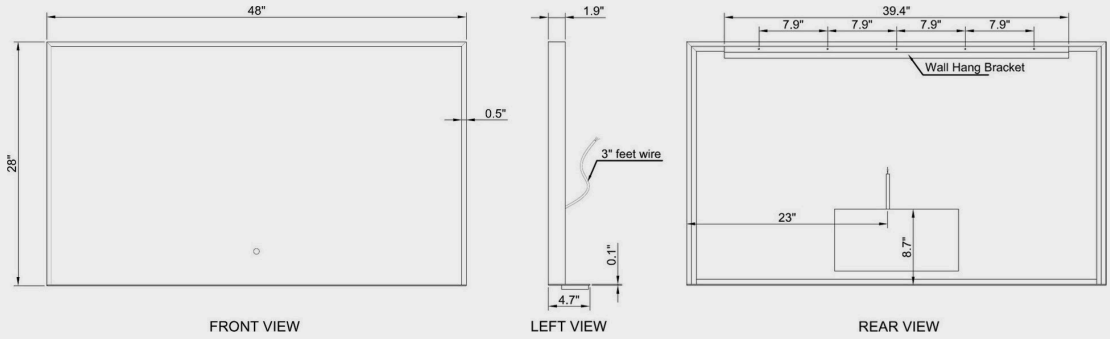

FRONT-LIT LED MIRROR, 3 SIZES

Front-lit LED mirror for the bathroom, available in 3 sizes, from 48 × 28 in to 70 × 32 in. It delivers 2,500 to 4,500 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,500 to 4,500 lm · CRI 90+
- 3 CCT by touch sensor
- Inner frame trim lighting
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	27 to 34 W depending on size
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,500 to 4,500 lm depending on size
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Sizes	48 × 28 · 60 × 36 · 70 × 32 in
Weight	32 to 52 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED WITH SHELF AND CHARGER MIRROR 48×28 TO 70×32 IN

LCMIR-LINEA

ORDERING

Build the product code

1 Series

LCMIR-LINEA

2 Size

4828 48 × 28 in
6036 60 × 36 in
7032 70 × 32 in

3 Color

3CCT-TS 3000K / 4000K / 6000K by touch sensor

EXAMPLE **LCMIR-LINEA** – **4828** – **BK** – **3CCT-TS**

series | 48 × 28 in | black | 3000K / 4000K / 6000K by touch sensor

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
48 × 28 in	27 W	2,500 lm	32 lb
60 × 36 in	34 W	3,500 lm	50 lb
70 × 32 in	34 W	4,500 lm	52 lb

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCMIR-LINEA-4828-BK-3CCT-TS	Dimension : 48X28 · Color temperature : 3CCT selectable
LCMIR-LINEA-6036-BK-3CCT-TS	Dimension : 60X36 · Color temperature : 3CCT selectable
LCMIR-LINEA-7032-BK-3CCT-TS	Dimension : 70X32 · Color temperature : 3CCT selectable

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


LED WITH SHELF FRONT-LIT MIRROR 20×36 IN 22 W - 110 V

LCMIR-ARV





DIMENSIONS: 20 × 36 IN

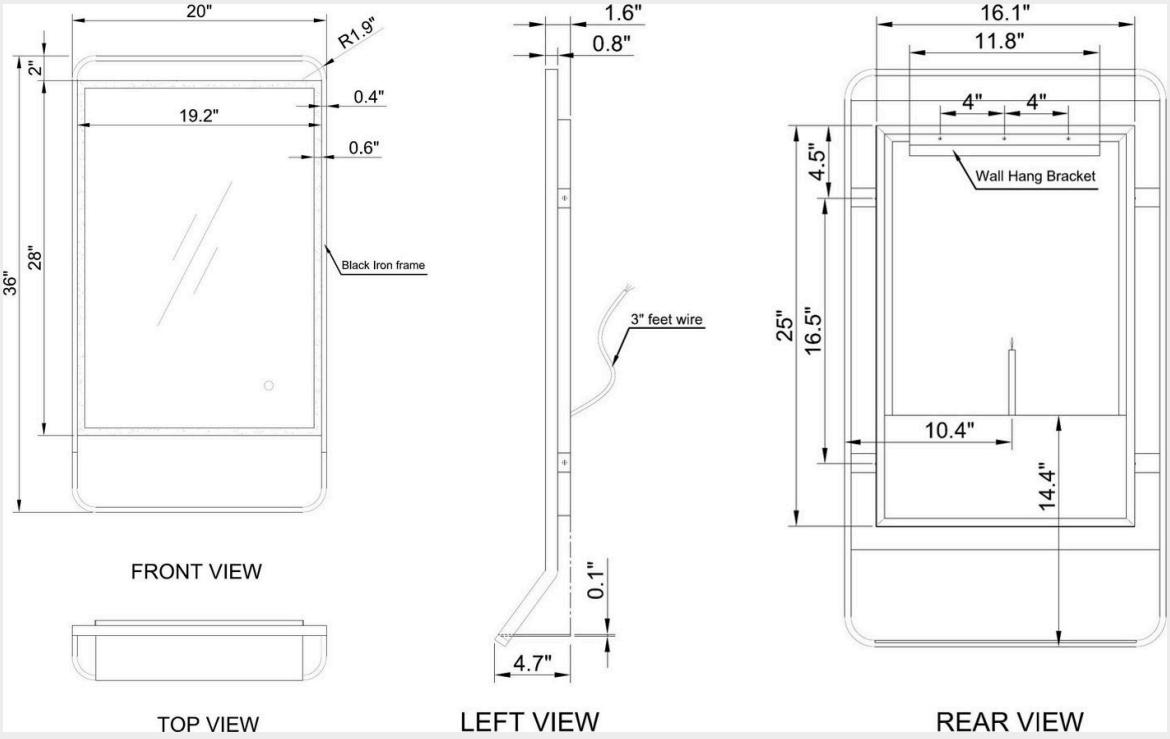

LED MIRRORS


LED WITH SHELF FRONT-LIT MIRROR 20×36 IN 22 W - 110 V

LCMIR-ARV





DIMENSIONS: 20 × 36 IN

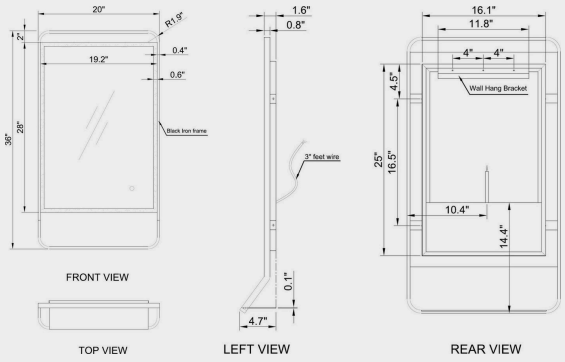

FRONT-LIT LED MIRROR, 1 SIZE

Front-lit LED mirror for the bathroom, available in 20 × 36 in. It delivers 2,850 lumens depending on size, with a CRI of 90+. Light: 3000K / 4000K / 6000K by touch sensor. Hard-wired to the circuit.

FEATURES

- 2,850 lm · CRI 90+
- 3 CCT by touch sensor
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110 V AC, hard-wired
Power	22 W
Control	touch sensor (3 CCT)

OPTICAL

Luminous flux	2,850 lm
CRI	90+
Color	3CCT-TS
Lifespan	120,000 h

PHYSICAL

Size	20 × 36 in
Weight	20 lb
Mounting	As shown only
Warranty	5 years

LOCATION RATING · IP44

✓ Dry	✗ Damp (covered)	✗ Wet

LED WITH SHELF FRONT-LIT MIRROR 20×36 IN 22 W - 110 V

LCMIR-ARV

ORDERING

Build the product code

1 Series

`LCMIR-ARV`

2 Size

`2036` 20 × 36 in

3 Color

`3CCT-TS` 3000K / 4000K / 6000K by touch sensor

EXAMPLE `LCMIR-ARV` (series) - `2036` (20 × 36 in) - `BK` (black) - `3CCT-TS` (3000K / 4000K / 6000K by touch sensor)

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
`LCMIR-ARV-2036-BK-3CCT-TS`	Dimension : 20X36 · Color temperature : 3CCT selectable

Per size (3000K / 6000K lumens when they differ) — 20 × 36 in: 22 W, 2 850 lm, 20 lb.
Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.


RECTANGULAR FRONT-LIT LED MIRROR 20×26 TO 100×45 IN

LCMIR-HAR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

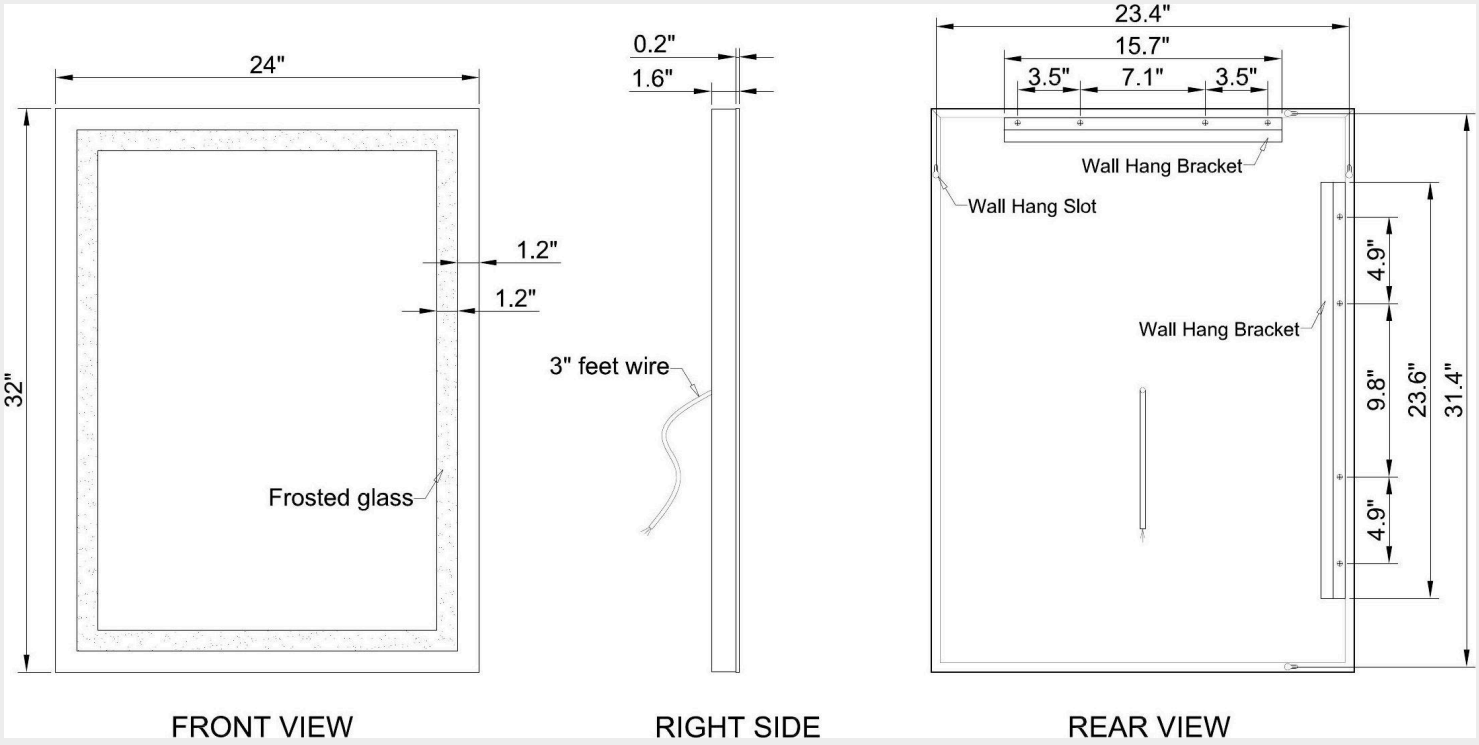


RECTANGULAR FRONT-LIT LED MIRROR 20×26 TO 100×45 IN

LCMIR-HAR





DIMENSIONS · 24 × 32 IN SIZE SHOWN

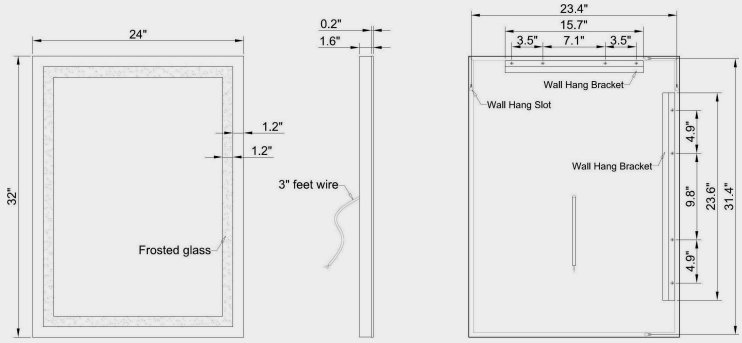

FRONT-LIT LED MIRROR, 18 SIZES, 5 LIGHT COLORS

Front-lit LED mirror for the bathroom, available in 18 sizes, from 20 × 26 in to 100 × 45 in. It delivers 3,450 to 12,860 lumens depending on size, with a CRI of 90+. Hard-wired to the circuit, assembled in Québec.

FEATURES

- 3,450 to 12,860 lm · CRI 90+
- 3000K · 6000K · 3 CCT · CCT · RGBW
- Dimmable: MLV or TRIAC wall dimmer
- IP44 · cULus certified
- 5 year warranty

ELECTRICAL

Voltage	110-120 V AC, hard-wired
Power	30 to 116 W depending on size
Control	MLV or TRIAC wall dimmer (3000K, 6000K) · touch sensor (3 CCT) · remote control (CCT, RGBW)

OPTICAL

Luminous flux	3,450 to 12,860 lm depending on size
CRI	90+
Color	30K · 60K · 3CCT-TS · CCT · RGBW
Lifespan	120,000 h

PHYSICAL

Sizes	18 sizes, from 20 × 26 to 100 × 45 in
Depth	1.6 in
Weight	21 to 117 lb
Mounting	Horizontal or vertical
Warranty	5 years

LOCATION RATING · IP44

- ✓ Dry
- ✗ Damp (covered)
- ✗ Wet

RECTANGULAR FRONT-LIT LED MIRROR 20×26 TO 100×45 IN

LCMIR-HAR

ORDERING

Build the product code

1 Series

LCMIR-HAR

2 Size

2026 20 × 26 in
2432 24 × 32 in
3042 30 × 42 in
3232 32 × 32 in
3636 36 × 36 in
4024 40 × 24 in
4035 40 × 35 in
4040 40 × 40 in
4824 48 × 24 in
4828 48 × 28 in
4835 48 × 35 in
5536 55 × 36 in
6028 60 × 28 in
6045 60 × 45 in
7032 70 × 32 in
7045 70 × 45 in
8540 85 × 40 in
10045 100 × 45 in

3 Color

30K 3000K warm white
60K 6000K cool white
3CCT-TS 3000K / 4000K / 6000K by touch sensor
CCT tunable white, remote control
RGBW RGBW (colors + white), remote control

EXAMPLE **LCMIR-HAR** – **2432** – **60K**
series | 24 × 32 in | 6000K cool white

PER SIZE

Size	Power	Lumens (3000K / 6000K)	Weight
20 × 26 in	30 W	3,450 / 3,550 lm	21 lb
24 × 32 in	35 W	4,140 / 4,250 lm	22 lb
30 × 42 in	54 W	5,740 lm	33 lb
32 × 32 in	45 W	4,974 lm	28 lb
36 × 36 in	54 W	5,930 / 5,940 lm	34 lb
40 × 24 in	45 W	4,960 / 4,970 lm	26 lb
40 × 35 in	54 W	5,930 / 5,940 lm	38 lb
40 × 40 in	58 W	6,410 / 6,430 lm	42 lb
48 × 24 in	54 W	5,440 / 5,450 lm	31 lb
48 × 28 in	54 W	5,930 / 5,940 lm	36 lb
48 × 35 in	60 W	6,910 / 7,110 lm	45 lb
55 × 36 in	65 W	7,620 / 7,830 lm	52 lb
60 × 28 in	65 W	7,620 / 7,830 lm	45 lb
60 × 45 in	76 W	8,930 / 9,180 lm	71 lb
70 × 32 in	76 W	9,188 lm	59 lb
70 × 45 in	90 W	9,920 / 9,940 lm	82 lb
85 × 40 in	98 W	10,890 / 10,910 lm	94 lb
100 × 45 in	116 W	12,830 / 12,860 lm	117 lb

Hard-wired: live to live, neutral to neutral, ground to ground; switch the power off at the panel before installing.
Hangs on a wall cleat (Z-bar) screwed level; plan an on/off wall switch.
Not suitable for saunas, steam rooms or shower stalls. Clean with a soft dry cloth, with the unit off.
Copper-free, silver-backed mirror glass.
Drilling: wear eye protection and watch for hidden wires and pipes; on tile, masking tape over the drilling point keeps the bit from slipping. Never use cleaning agents or abrasives; do not strike the glass or set very hot or cold items against it.
Light colors — 3000K: soft, warm light; 6000K: crisp daylight white; CCT touch button: 3000K, 4000K or 6000K by touch; tunable white: every shade of white, by remote; multicolor RGB: mood colors and white, by remote.