
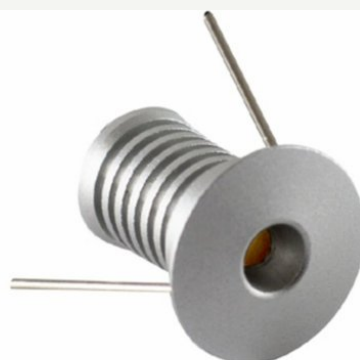
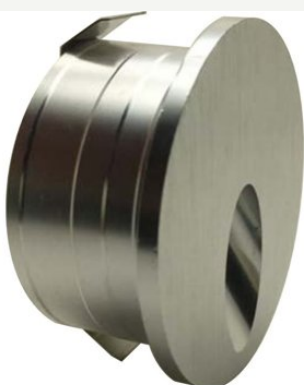


2026 CATALOG

LED Puck Lights

14 products

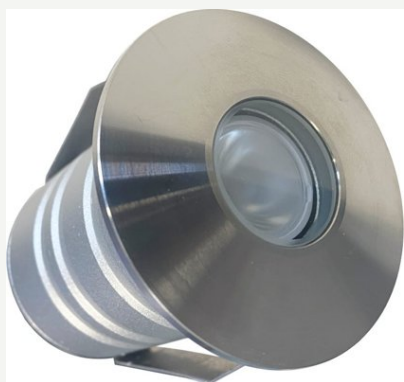


Updated October 4, 2026


TABLE OF CONTENTS

LED Puck Lights

	LED LANDSCAPE RECESSED LIGHT 3 W - IP67 LCAP-PAV024V3W	p. 3
	RECESSED DIRECTIONAL LED PUCK LIGHT Ø 2 IN 1 W - IP67 LCPK2000	p. 5
	RECESSED LED PUCK LIGHT 2 IN 1 W - IP67 LCPK2000	p. 7
	RECESSED LED PUCK LIGHT ROUND OR SQUARE 2 IN 1 W - 12/24 V LCPK600	p. 10
	RECESSED LED PUCK LIGHT SQUARE 2.4 IN 3 W - 12/24 V LCPK700	p. 12
	RECESSED LED PUCK LIGHT Ø 0.75 IN 0.5 W - 24 V LCPK800	p. 14
	RECESSED LED PUCK LIGHT Ø 1.7 IN 3 W - 24 V LCPK500	p. 16
	RECESSED LED PUCK LIGHT Ø 2 IN 3 W - 12/24 V LCPK200	p. 18
	RECESSED LED PUCK LIGHT Ø 2.7 IN 3 W - 12/24 V LCPK150R	p. 20
	RECESSED LED PUCK LIGHT Ø 3.1 IN 3 W - 12/24 V LCPK300	p. 22
	RECESSED LED WALL BRICK LIGHT 3 1/4 × 5 3/16 IN 2 W - 120 V LCPK975	p. 24
	RECESSED LED WALL PUCK LIGHT 2 3/4 × 4 5/8 IN 2.5 W - 120 V LCPK950	p. 26
	RECESSED LED WALL PUCK LIGHT 3 × 5 IN 3.3 W - 120 V LCPK900	p. 28
	SURFACE LED PUCK LIGHT SQUARE 1.6 IN 1 W - 12 V LCPK400	p. 30

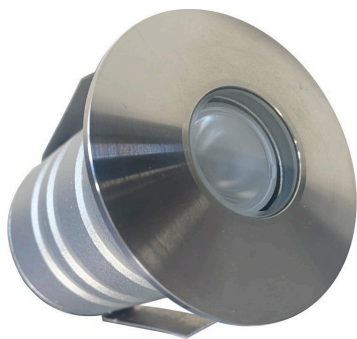

DIMENSIONS: Ø 60 × 83 mm



RECESSED INTO PAVERS AND CONCRETE

3 W low-voltage 24 V recessed LED fixture designed for paver and concrete surfaces. It lights walkways, driveways and patios with a 15° beam. Available in 3000K, 4000K and RGB, brushed stainless steel finish, with PVC sleeve.

FEATURES

- 44 mm (1.732 in) cutout.
- 15° beam.
- 300 lumens from 3 W.
- IP67: wet locations.
- Embedded part and PVC sleeve.
- Dimmable with a 24 V dimmable power supply.

ELECTRICAL

Voltage	24 V DC
Power	3 W (3 × 1 W LEDs)
Dimmable	Yes (24 V dimmable power supply)
Wire	0.4 m, bare leads

OPTICAL

Output	300 lm
Color	3000K · 4000K · RGB
Beam angle	15°

PHYSICAL

Cutout	44 mm (1.732 in)
Dimensions	Ø 60 × 83 mm (2.362 × 3.268 in)
PVC sleeve	107 × 42 mm (4.213 × 1.653 in)
Finish	316 stainless cover, aluminum housing
Operating temp.	-25 °C to +60 °C
Lifespan	30,000 h
Warranty	2 years

LOCATION RATING · IP67

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Series

LCAP-PAVO24V3W 24 V, 3 W

2 Color

3000K

4000K

RGB

EXAMPLE **LCAP-PAVO24V3W - 3000K**
24 V · 3 W 3000K

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCAP-PAVO24V3W-3000K	Color temperature : 3000K
LCAP-PAVO24V3W-4000K	Color temperature : 4000K
LCAP-PAVO24V3W-RGB	Color temperature : RGB


Use a suitable 24 V power supply (website description).



FINITION / FINISH



MODULE DIMENSIONS (Ø 50 ROUND TRIM SHOWN)

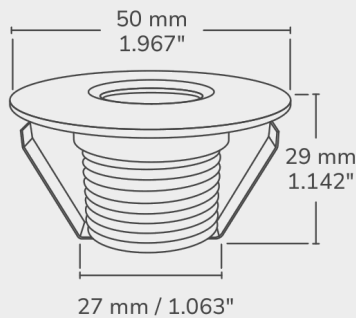

LIGHT ON ONE SIDE, BOTH SIDES OR DOWNWARD

The 1 W, 12 V or 24 V, IP67 PK2000 LED puck with a directional trim: 1-side, 2-side or scoop. For balcony steps, patios, low walls and architectural effects. Available in 3000K, 4000K and RGB. Round, square and louver trims: see the LCPK2000 sheet.

FEATURES

- 35 mm (1.378 in) cutout.
- 1-side: 25° beam on one side only.
- 2-side: symmetrical double beam.
- Scoop: light aimed in one direction.
- IP67: wet locations.
- cETLus listed.

ELECTRICAL

Voltage	12 / 24 V DC
Power	1 W (RGB: 1.2 W)
Incandescent equivalent	20 W
Power factor	+90
Dimmable	Yes
Wire	30 cm, no connector

OPTICAL

Output	90 lm (RGB: 85 lm)
Color	3000K · 4000K · RGB
Beam angle	25° (RGB: 120°)
CRI	> 80

PHYSICAL

Dimensions	Body Ø 27 · trim Ø 46 (scoop Ø 39) mm
Cutout	35 mm (1.378 in)
Rating	IP67
Finishes	Stainless · brushed nickel · black · white
Lifespan	25,000 h
Module housing	Polycarbonate
Warranty	3 years

LOCATION RATING · IP67

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Trim LCPK2000R-1S 1-side LCPK2000R-2S 2-side LCPK2000R-RT-SCOOP scoop	2 Power 1W 1 W	3 Color 3000K 4000K RGB	4 Finish BS stainless (1- and 2-side) BN brushed nickel (scoop) BK black (scoop) WH white (scoop)
--	---------------------------------	--	--

EXAMPLE	LCPK2000R-1S	-	1W	-	3000K	-	BS
	1-side		1 W		3000K		stainless

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK2000R-1S-1W-3000K-BS	Finish : Stainless · Color temperature : 3000K
LCPK2000R-1S-1W-4000K-BS	Finish : Stainless · Color temperature : 4000K
LCPK2000R-1S-1W-RGB-BS	Finish : Stainless · Color temperature : RGB
LCPK2000R-2S-1W-3000K-BS	Finish : Stainless · Color temperature : 3000K
LCPK2000R-2S-1W-4000K-BS	Finish : Stainless · Color temperature : 4000K
LCPK2000R-2S-1W-RGB-BS	Finish : Stainless · Color temperature : RGB
LCPK2000R-RT-SCOOP-1W-3000K-BK	Scoop · 3000K · black
LCPK2000R-RT-SCOOP-1W-3000K-BN	Scoop · 3000K · brushed nickel
LCPK2000R-RT-SCOOP-1W-3000K-WH	Scoop · 3000K · white
LCPK2000R-RT-SCOOP-1W-4000K-BK	Scoop · 4000K · black
LCPK2000R-RT-SCOOP-1W-4000K-BN	Scoop · 4000K · brushed nickel
LCPK2000R-RT-SCOOP-1W-RGB-BK	Scoop · RGB · black
LCPK2000R-RT-SCOOP-1W-RGB-BN	Scoop · RGB · brushed nickel


ACCESSORIES

Code	Description	Sold
LCPK2000R-RT-1SIDE-BS	PK2000 puck trim - round 1-side stainless	each
LCPK2000R-RT-2SIDE-BS	PK2000 puck trim - round 2-side stainless	each
LCPK2000R-RT-SCOOP-BN	PK2000 puck trim - scoop brushed nickel	each
LCPK2000R-RT-SCOOP-WH	PK2000 puck trim - scoop white	each
LCPK2000R-RT-SCOOP-BK	PK2000 puck trim - scoop black	each

Trims (RT) are also sold separately: see accessories.



DIMENSIONS: Ø 50 × 29 mm

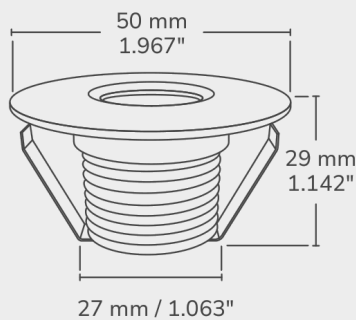

ROUND, SQUARE OR LOUVER, IP67

1 W recessed LED puck, 12 V or 24 V, IP67, for balcony steps, patios, stairs and landscape lighting. It is ordered with a round, square or louver trim, in stainless, white or black, and in 3000K, 4000K or RGB. Directional trims (1-side, 2-side, scoop): see the LCPK2000 directional sheet.

FEATURES

- 35 mm (1.378 in) cutout.
- 90 lumens from 1 W.
- IP67: wet locations.
- Round, square and louver trims.
- Dimmable.
- cETLus listed.

ELECTRICAL

Voltage	12 / 24 V DC
Power	1 W (RGB: 1.2 W)
Incandescent equivalent	20 W
Power factor	+90
Dimmable	Yes
Wire	30 cm, no connector

OPTICAL

Output	90 lm (RGB: 85 lm)
Color	3000K · 4000K · RGB
Beam angle	25° (RGB: 120°)
CRI	> 80

PHYSICAL

Dimensions	Ø 50 × 29 mm (body Ø 27 mm)
Cutout	35 mm (1.378 in)
Rating	IP67
Finishes	Stainless · white · black
Lifespan	25,000 h
Module housing	Polycarbonate
Warranty	3 years
Trims	Round Ø 50 · square 41 × 41 · louver Ø 39 mm

LOCATION RATING · IP67

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Trim LCPK2000R round LCPK2000S square LCPK2000P louver	2 Power 1W 1 W	3 Color 3000K 4000K RGB	4 Finish BS stainless WH white BK black
---	---------------------------------	--	--

EXAMPLE	LCPK2000R	-	1W	-	3000K	-	BS
	round		1 W		3000K		stainless

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK2000-12-24V-30K	RONDELLE DEL #2000 12-24V 1W IP67 (30K)
LCPK2000-12-24V-40K	RONDELLE DEL #2000 12-24V 1W IP67 (40K)
LCPK2000-12-24V-RGB	RONDELLE DEL #2000 12-24V 1W IP67 (RGB)
LCPK2000P-1W-3000K-BK	Finish : Black · Color temperature : 3000K
LCPK2000P-1W-3000K-BS	Finish : Stainless · Color temperature : 3000K
LCPK2000P-1W-4000K-BK	Finish : Black · Color temperature : 4000K
LCPK2000P-1W-4000K-BS	Finish : Stainless · Color temperature : 4000K
LCPK2000P-1W-RGB-BK	Finish : Black · Color temperature : RGB
LCPK2000P-1W-RGB-BS	Finish : Stainless · Color temperature : RGB
LCPK2000R-1W-3000K-BK	Finish : Black · Color temperature : 3000K
LCPK2000R-1W-3000K-BS	Finish : Stainless · Color temperature : 3000K
LCPK2000R-1W-3000K-WH	Finish : White · Color temperature : 3000K
LCPK2000R-1W-4000K-BK	Finish : Black · Color temperature : 4000K
LCPK2000R-1W-4000K-BS	Finish : Stainless · Color temperature : 4000K
LCPK2000R-1W-4000K-WH	Finish : White · Color temperature : 4000K
LCPK2000R-1W-RGB-BK	Finish : Black · Color temperature : RGB
LCPK2000R-1W-RGB-BS	Finish : Stainless · Color temperature : RGB
LCPK2000R-1W-RGB-WH	Finish : White · Color temperature : RGB
LCPK2000S-1W-3000K-BK	Finish : Black · Color temperature : 3000K
LCPK2000S-1W-3000K-BS	Finish : Stainless · Color temperature : 3000K
LCPK2000S-1W-3000K-WH	Finish : White · Color temperature : 3000K
LCPK2000S-1W-4000K-BK	Finish : Black · Color temperature : 4000K
LCPK2000S-1W-4000K-BS	Finish : Stainless · Color temperature : 4000K
LCPK2000S-1W-4000K-WH	Finish : White · Color temperature : 4000K
LCPK2000S-1W-RGB-BK	Finish : Black · Color temperature : RGB
LCPK2000S-1W-RGB-BS	Finish : Stainless · Color temperature : RGB
LCPK2000S-1W-RGB-WH	Finish : White · Color temperature : RGB

ACCESSORIES


Code	Description	Sold
LCPK2000R-RT-BS	PK2000 puck trim - round stainless	each
LCPK2000R-RT-WH	PK2000 puck trim - round white	each
LCPK2000R-RT-BK	PK2000 puck trim - round black	each
LCPK2000S-RT-BS	PK2000 puck trim - square stainless	each
LCPK2000S-RT-WH	PK2000 puck trim - square white	each
LCPK2000S-RT-BK	PK2000 puck trim - square black	each
LCPK2000P-RT-BS	PK2000 puck trim - louver stainless	each
LCPK2000P-RT-WH	PK2000 puck trim - louver white	each
LCPK2000P-RT-BK	PK2000 puck trim - louver black	each

LCPK2000-12-24V-...: the module alone, without trim; trims (RT) are sold separately: see accessories.

The complete louver puck comes in stainless and black; the white louver trim is sold separately (LCPK2000P-RT-WH).



DIMENSIONS: 50 × 50 × 27 mm



DISCREET STEP LIGHTING

1 W recessed LED puck for stair steps, hallways and light-and-shadow effects. Available with a round (600R) or square (600S) trim, in stainless, white or black, in 3000K and 4000K. Dimmable with our 120 V LED dimmers and dimmable power supplies.

FEATURES

- 47 mm (1.850 in) cutout.
- Round or square trim.
- Stainless, white and black finishes.
- 3000K or 4000K.
- Dimmable.
- cULus listed.

ELECTRICAL

Voltage	12 V or 24 V DC
Power	1 W
Dimmable	Yes
Connector	DC5521

OPTICAL

Output	80 lm
Color	3000K · 4000K
Beam angle	15°
CRI	> 80

PHYSICAL

Dimensions	50 × 50 × 27 mm
Cutout	47 mm (1.850 in)
Finishes	Stainless · white · black
Operating temp.	40 °C (room at 25 °C)
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP21

✓ Dry

✗ Damp
(covered)

✗ Wet

ORDERING

Build the product code

1 Series LCPK600R round LCPK600S square	2 Voltage 12V 12 V 24V 24 V	3 Color 30K 3000K 40K 4000K	4 Finish BS stainless WH white BK black
--	--	--	--

EXAMPLE	LCPK600R	-	24V	-	30K	-	BS
	round		24 V		3000K		stainless


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK600R-12V-40K-BS	Finish : Stainless · Voltage : 12V · Color temperature : 4000K
LCPK600R-24V-30K-BK	Voltage : 24V · Finish : Black · Color temperature : 3000K
LCPK600R-24V-30K-BS	Voltage : 24V · Finish : Stainless · Color temperature : 3000K
LCPK600R-24V-30K-WH	Finish : White · Voltage : 24V · Color temperature : 3000K
LCPK600R-24V-40K-BK	Voltage : 24V · Finish : Black · Color temperature : 4000K
LCPK600R-24V-40K-WH	Voltage : 24V · Finish : White · Color temperature : 4000K
LCPK600S-12V-40K-BK	Voltage : 12V · Finish : Black · Color temperature : 4000K
LCPK600S-12V-40K-BS	RONDELLE DEL #600S 12V 1W STAINLESS (40K)
LCPK600S-12V-40K-WH	Finish : White · Voltage : 12V · Color temperature : 4000K
LCPK600S-24V-30K-BK	Voltage : 24V · Finish : Black · Color temperature : 3000K
LCPK600S-24V-30K-BS	Voltage : 24V · Finish : Stainless · Color temperature : 3000K
LCPK600S-24V-30K-WH	Voltage : 24V · Finish : White · Color temperature : 3000K
LCPK600S-24V-40K-BK	Finish : Black · Voltage : 24V · Color temperature : 4000K
LCPK600S-24V-40K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 4000K
LCPK600S-24V-40K-WH	Voltage : 24V · Finish : White · Color temperature : 4000K


Not every combination is offered: see the range (12 V in 4000K only).



FINITION / FINISH



DIMENSIONS: 60 × 60 × 33 mm



THE SQUARE VERSION OF THE PK200

3 W square recessed LED puck for stair lighting, brick walls, niches and alcoves. It delivers 250 lumens, in 3000K or 4000K. Dimmable with our 120 V LED dimmers and dimmable power supplies.

FEATURES

- 48 mm (1.890 in) cutout.
- 250 lumens from 3 W.
- 3000K or 4000K.
- Stainless finish.
- Dimmable.
- ETL listed.

ELECTRICAL

Voltage	12 V or 24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Output	250 lm
Color	3000K · 4000K
Beam angle	40°
CRI	> 80

PHYSICAL

Dimensions	60 × 60 × 33 mm
Cutout	48 mm (1.890 in)
Finish	Stainless
Operating temp.	40 °C (room at 25 °C)
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP20



Dry

Damp
(covered)

Wet



LED PUCK LIGHTS
RECESSED LED PUCK LIGHT SQUARE 2.4 IN 3 W - 12/24 V
LCPK700

ORDERING

Build the product code


1 Series LCPK700	2 Voltage 12V 12 V 24V 24 V	3 Color 30K 3000K 40K 4000K	4 Finish BS stainless
----------------------------	--	--	---------------------------------

EXAMPLE	LCPK700	-	24V	-	30K	-	BS
	series		24 V		3000K		stainless


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK700-12V-40K-BS	RONDELLE DEL #700 12V 3W STAINLESS (40K)
LCPK700-24V-30K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 3000K
LCPK700-24V-40K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 4000K

Not every combination is offered: see the range.



DIMENSIONS: Ø 19 × 21 mm



ULTRA SMALL: 16 MM CUTOUT

Very small 0.5 W, 24 V recessed LED puck for marking stairs, hallways, patios and gardens. Its pressure-fit clips hold in thin-walled structures, and its trim is low profile. Available in stainless, white and black, in 3000K and 4000K.

FEATURES

- 16 mm (5/8 in) cutout.
- Pressure-fit clips for thin walls.
- Low profile trim.
- 68 lumens from 0.5 W.
- IP65, dimmable.
- cETLus listed.

ELECTRICAL

Voltage	24 V DC
Power	0.5 W
Dimmable	Yes
Wire	30 cm, no connector

OPTICAL

Output	68 lm
Color	3000K · 4000K
Beam angle	30°
CRI	> 85

PHYSICAL

Dimensions	19 × 19 × 21 mm
Cutout	16 mm (5/8 in)
Finishes	Stainless · white · black · silver
Rating	IP65
Lifespan	25,000 h
Warranty	3 years
Housing	Aluminum

LOCATION RATING · IP65



Dry



Damp
(covered)



Wet

ORDERING

Build the product code

1 Series LCPK800-24V-0.5W 24 V, 0.5 W	2 Color 30K 3000K 40K 4000K	3 Finish BS stainless WH white BK black SL silver
--	--	--

EXAMPLE	LCPK800-24V-0.5W	-	30K	-	BS
	24 V · 0.5 W		3000K		stainless

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCPK800-24V-0.5W-30K-BK	Voltage : 24V · Finish : Black · Color temperature : 3000K
LCPK800-24V-0.5W-30K-BS	Voltage : 24V · Finish : Stainless · Color temperature : 3000K
LCPK800-24V-0.5W-30K-SL	RONDELLE DEL #800 MINI ROND ARGENT 24V 0,5W IP67 (30K)
LCPK800-24V-0.5W-30K-WH	Finish : White · Voltage : 24V · Color temperature : 3000K
LCPK800-24V-0.5W-40K-BK	Finish : Black · Voltage : 24V · Color temperature : 4000K
LCPK800-24V-0.5W-40K-BS	Voltage : 24V · Finish : Stainless · Color temperature : 4000K
LCPK800-24V-0.5W-40K-WH	Finish : White · Voltage : 24V · Color temperature : 4000K



FINITION / FINISH



DIMENSIONS: Ø 42 × 46 mm



SMALL 3 W RECESSED PUCK, IP44

Small 3 W recessed LED puck to highlight a brick wall, a niche or architectural features. Brushed aluminum finish, in 3000K and 4000K.

FEATURES

- 32 mm (1.260 in) cutout.
- 45° beam.
- 3000K or 4000K.
- Dimmable.
- cETL listed.
- IP44.

ELECTRICAL

Voltage	24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Output	135 lm
Color	3000K · 4000K
Beam angle	45°
CRI	80 +

PHYSICAL

Dimensions	Ø 42 × 46 mm
Cutout	32 mm (1.260 in)
Finish	Brushed aluminum (stainless)
Rating	IP44
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP44



Dry

Damp
(covered)

Wet



RECESSED LED PUCK LIGHT Ø 1.7 IN 3 W - 24 V

LCPK500

ORDERING

Build the product code

1 Series LCPK500	2 Voltage 24V 24 V	3 Color 30K 3000K 40K 4000K	4 Finish BS stainless
--	--	--	---


EXAMPLE	LCPK500	-	24V	-	30K	-	BS
	series		24 V		3000K		stainless

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK500-24V-30K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 3000K
LCPK500-24V-40K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 4000K



DIMENSIONS: Ø 50 × 34 mm



A DIRECTED BEAM FOR STEPS, WALLS AND NICHES

3 W recessed LED puck, Ø 50 mm, for stair lighting, brick walls and decorative niches. Available in 3000K and 4000K, in stainless, white and black finishes. Dimmable with our 120 V LED dimmers and dimmable power supplies.

FEATURES

- 42 mm (1.654 in) cutout.
- 250 lumens from 3 W.
- Stainless, white and black finishes.
- Dimmable.
- Square version: the PK700.
- cULus listed.

ELECTRICAL

Voltage	12 V or 24 V DC
Power	3 W
Dimmable	Yes
Connector	DC5521

OPTICAL

Output	250 lm
Color	3000K · 4000K
Beam angle	30°
CRI	> 80

PHYSICAL

Dimensions	Ø 50 × 34 mm
Cutout	42 mm (1.654 in)
Finishes	Stainless · white · black
Operating temp.	40 °C (room at 25 °C)
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP20



Dry

Damp
(covered)

Wet

ORDERING

Build the product code


1 Series LCPK200	2 Voltage 12V 12 V 24V 24 V	3 Color 30K 3000K 40K 4000K	4 Finish BS stainless WH white BK black
-----------------------------------	--	--	--

EXAMPLE	LCPK200	-	24V	-	30K	-	BS
	series		24 V		3000K		stainless


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK200-12V-40K-BK	Voltage : 12V · Finish : Black · Color temperature : 4000K
LCPK200-12V-40K-BS	Voltage : 12V · Finish : Stainless · Color temperature : 4000K
LCPK200-12V-40K-WH	Voltage : 12V · Finish : White · Color temperature : 4000K
LCPK200-24V-30K-BK	Voltage : 24V · Finish : Black · Color temperature : 3000K
LCPK200-24V-30K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 3000K
LCPK200-24V-30K-WH	Voltage : 24V · Finish : White · Color temperature : 3000K
LCPK200-24V-40K-BK	Voltage : 24V · Finish : Black · Color temperature : 4000K
LCPK200-24V-40K-BS	Finish : Stainless · Voltage : 24V · Color temperature : 4000K
LCPK200-24V-40K-WH	Voltage : 24V · Finish : White · Color temperature : 4000K

Not every combination is offered: see the range (12 V in 4000K only).

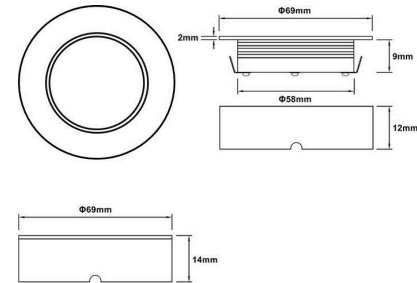

DIMENSIONS: Ø 69 × 15 mm



RGBW: COLORS AND WHITE IN ONE PUCK

3 W RGBW LED puck, surface or recessed mounted, for under-cabinet kitchen lighting, bookcases and accent lighting. It combines RGB colors with 3000K or 4000K white. It is controlled with the LEDCO R24 RGBW 1-zone remote and receiver.

FEATURES

- Recessed (60 mm cutout) or surface mount.
- RGB + 3000K or 4000K white.
- 250 lumens from 3 W.
- 120° beam.
- LEDCO R24 RGBW remote and receiver.
- cULus listed.

ELECTRICAL

Voltage	12 V or 24 V DC
Power	3 W
Dimmable	Yes

OPTICAL

Output	250 lm
Color	RGBW 3000K · RGBW 4000K
Beam angle	120°
CRI	> 80

PHYSICAL

Dimensions	69 × 69 × 15 mm
Cutout	60 mm (2.362 in)
Finish	Nickel
Operating temp.	40 °C (room at 25 °C)
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP20



Dry



Damp
(covered)



Wet



ORDERING

Build the product code

1 Series LCPK150R	2 Voltage 12V 12 V 24V 24 V	3 Color RGBW30K RGB + 3000K RGBW40K RGB + 4000K	4 Finish BS nickel
--	---	---	---

EXAMPLE	LCPK150R	-	24V	-	RGBW40K	-	BS
	series		24 V		RGB + 4000K		nickel

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK150R-12V-RGBW40K-BS	RGBW puck 12 V, RGB + 4000K, nickel finish
LCPK150R-24V-RGBW30K-BS	RGBW puck 24 V, RGB + 3000K, nickel finish
LCPK150R-24V-RGBW40K-BS	RGBW puck 24 V, RGB + 4000K, nickel finish

Power: non-dimmable LED power supply matching the code voltage, 12 V or 24 V (website description).






FINITION / FINISH



DIMENSIONS: Ø 80 × 22 mm



THREE SELECTABLE COLOR TEMPERATURES

3 W, 12 V or 24 V LED puck for under-cabinet lighting, bookcases, displays and closets. A switch on the puck selects 2700K, 3000K or 4000K. It mounts recessed or on the surface with the spacer, and its magnetic trim can be swapped (brushed nickel, white, black).

FEATURES

- 2700K · 3000K · 4000K switch.
- Recessed (60 mm cutout) or surface with spacer.
- Interchangeable magnetic trim.
- CRI > 90.
- 120° beam.
- cULus listed.

ELECTRICAL

Voltage	12 V or 24 V DC
Power	3 W
Dimmable	Yes
Connector	DC5521

OPTICAL

Output	240 lm
Color	CCT 2700K · 3000K · 4000K
Beam angle	120°
CRI	> 90

PHYSICAL

Dimensions	Ø 80 × 22 mm (spacer 23 mm)
Cutout	60 mm (2.362 in)
Mounting	Recessed · surface (spacer)
Finishes	Brushed nickel · white · black
Weight	70 g
Lifespan	25,000 h
Warranty	3 years

ORDERING

Build the product code

1 Series LCPK300	2 Voltage 24V 24 V 12V 12 V	3 Color CCT 2700K / 3000K / 4000K	4 Finish BS brushed nickel WH white BK black
----------------------------	--	---	--

EXAMPLE	LCPK300	-	24V	-	CCT	-	BS
	series		24 V		2700-4000K		brushed nickel


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK300-12V-CCT	RONDELLE DEL #300 12V 3W (CCT)
LCPK300-24V-CCT	RONDELLE DEL #300 24V 3W (CCT)
LCPK300-24V-CCT-BK	Finish : Black · Voltage : 24V · Color temperature : CCT
LCPK300-24V-CCT-BS	Finish: brushed nickel · 24 V · CCT 2700K / 3000K / 4000K
LCPK300-24V-CCT-WH	Finish : White · Voltage : 24V · Color temperature : CCT


ACCESSORIES

Code	Description	Sold
LCPK300-RT-BS	PK300 puck trim - round brushed nickel	each
LCPK300-RT-WH	PK300 puck trim - round white	each
LCPK300-RT-BK	PK300 puck trim - round black	each
LCPK300-RING-BS	PK300 puck ring - brushed nickel	each
LCPK300-RING-WH	PK300 puck ring - white	each
LCPK300-RING-BK	PK300 puck ring - black	each

Switch: right 2700K, middle 3000K, left 4000K (former sheet).

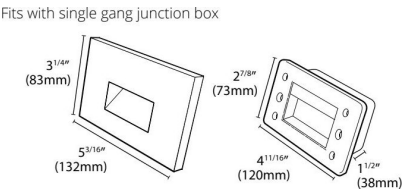

DIMENSIONS: 83 × 132 × 38 mm

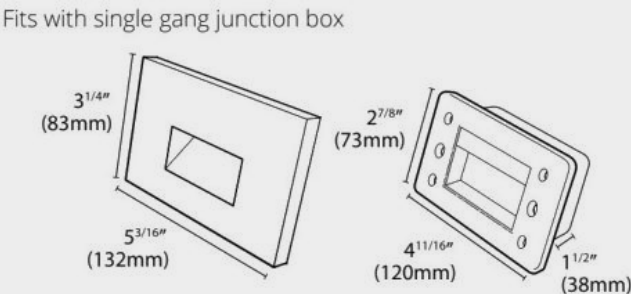

SCREWLESS, FOR STEPS, PATIOS AND PATHS

2 W, 120 V recessed LED wall brick to mark walkways, light walls and highlight architectural features. It mounts in a standard North American single-gang junction box. 3000K, in stainless, white or black.

FEATURES

- cETLus listed, damp location, indoor and outdoor.
- North American single-gang junction box.
- Screwless.
- Dimmable.
- 185 lumens from 2 W.
- Over 50,000 h.

ELECTRICAL		PHYSICAL	
Voltage	100-120 V AC	Faceplate	83 × 132 mm (3 1/4 × 5 3/16 in)
Power	2 W	Cutout	73 × 120 mm (2 7/8 × 4 11/16 in)
Dimmable	Yes	Depth	38 mm (1 1/2 in)
OPTICAL		Location	Damp, outdoor (listed)
Output	185 lm	Finishes	Stainless · white · black
Color	3000K	Lifespan	50,000 h +
		Warranty	3 years



ORDERING

Build the product code


1 Series LCPK975-120V-2W 120 V, 2 W	2 Color 30K 3000K	3 Finish BS stainless WH white BK black
---	---	---

EXAMPLE	LCPK975-120V-2W - 30K - BS
	120 V · 2 W 3000K stainless


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK975-120V-2W-30K-BK	Finish : Black
LCPK975-120V-2W-30K-BS	Finish : Stainless
LCPK975-120V-2W-30K-WH	Finish : White


Applications: step, path, patio (website).



FINITION / FINISH



DIMENSIONS: 71 × 116 mm

**WALL MOUNTED, VERTICAL OR HORIZONTAL**

120 V recessed LED wall puck for stairs, hallways and areas that call for discreet, glare-free light. It installs vertically or horizontally and suits damp environments, in insulated or non-insulated areas. 3000K, in white or black.

FEATURES

- 120 V.
- Vertical or horizontal mounting.
- Damp environments.
- Insulated or non-insulated areas.
- 3000K.
- ETL listed.

ELECTRICAL

Voltage	120 V
Power	2.5 W (Zoho)

OPTICAL

Color	3000K
-------	-------

PHYSICAL

Faceplate	71 × 116 mm (2 3/4 × 4 5/8 in)
Housing	50 × 60 mm (2 × 2 3/8 in)
Depth	47 mm (1 7/8 in)
Window	36.5 mm (1 1/2 in)
Mounting	Wall, vertical or horizontal
Finishes	White · black



RECESSED LED WALL PUCK LIGHT 2 3/4 × 4 5/8 IN 2.5 W - 120 V

LED PUCK LIGHTS

LCPK950

ORDERING

Build the product code

1 Series LCPK950	2 Voltage 120V 120 V	3 Color 30K 3000K	4 Finish WH white BK black
----------------------------	--------------------------------	-----------------------------	---

EXAMPLE	LCPK950	- 120V	- 30K	- WH
	series	120 V	3000K	white


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK950-120V-30K-BK	RONDELLE DEL #950 120V 2,5W (30K) BLACK
LCPK950-120V-30K-WH	Voltage : 120V · Finish : White · Color temperature : 3000K

No former sheet: dimensions come from the drawing in the website gallery.



DIMENSIONS

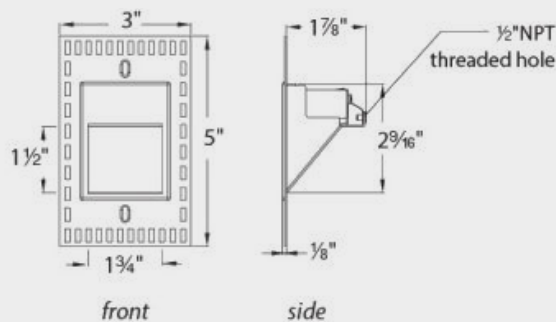

FLUSH, NO VISIBLE HARDWARE

3.3 W, 120 V LED wall puck for stairs, walls and walkways. It installs in a 2 × 4 in electrical box, sits flush with the wall with no visible hardware and can be painted to match the surface. Die-cast aluminum housing, white finish, 3000K.

FEATURES

- 120 V AC, 50/60 Hz.
- 2 × 4 in electrical box.
- Paintable.
- Low glare.
- Up to 200 fixtures in parallel.
- ETL / cETL listed, damp location.

ELECTRICAL

Voltage	120 V AC, 50/60 Hz
Power	3.3 W
Dimming	ELV, 100 to 10 %

OPTICAL

Output	72 lm
Color	3000K
CRI	90

PHYSICAL

Dimensions	3 × 5 in
Box	2 × 4 in, min. inside 3 × 2 × 2 in
Housing	Die-cast aluminum
Finish	White (enamel on aluminum)
Operating temp.	-20 °C to 40 °C
Location	Damp (listed)
Lifespan	50,000 h



ORDERING

Build the product code

1 Series LCPK900	2 Voltage 120V 120 V	3 Color 30K 3000K	4 Finish WH white
---	---	--	--

EXAMPLE	LCPK900	-	120V	-	30K	-	WH
	series		120 V		3000K		white


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK900-120V-30K-WH	Voltage : 120V · Finish : White · Color temperature : 3000K


Standards on the original sheet: ETL, cETL, damp location, ADA, Title 24 JA8.



FINITION / FINISH

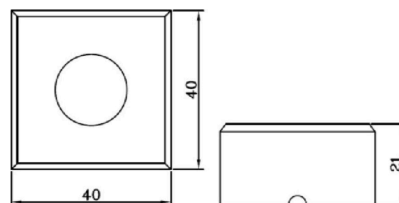

DIMENSIONS: 40 × 40 × 21 mm

**SURFACE MOUNTED, NO CUTOUT**

1 W, 12 V square LED puck for stairs, hallways, bookcases and under-cabinet lighting. It mounts on the surface, with no cutout. Stainless finish, 3000K.

FEATURES

- Surface mount, no cutout.
- 90 lumens from 1 W.
- 45° beam.
- Dimmable.
- 3000K.
- cETL listed.

ELECTRICAL

Voltage	12 V DC
Power	1 W
Dimmable	Yes

OPTICAL

Output	90 lm
Color	3000K
Beam angle	45°
CRI	> 80

PHYSICAL

Dimensions	40 × 40 × 21 mm
Cutout	None (surface)
Finish	Stainless
Operating temp.	40 °C (room at 25 °C)
Lifespan	25,000 h
Warranty	3 years

LOCATION RATING · IP22

Dry

Damp
(covered)

Wet

ORDERING

Build the product code

1 Series LCPK400	2 Voltage 12V 12 V	3 Color 30K 3000K	4 Finish BS stainless
-----------------------------------	-------------------------------------	------------------------------------	--

EXAMPLE	LCPK400	-	12V	-	30K	-	BS
	series		12 V		3000K		stainless

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCPK400-12V-30K-BS	Finish : Stainless · Voltage : 12V · Color temperature : 3000K