

2026 CATALOG

LED Wall Washers

5 products



Updated October 4, 2026

TABLE OF CONTENTS

LED Wall Washers

	3-CHANNEL DMX CONTROLLER AND DECODER LCWDMXCONT + LCWDMX	p. 3
	LED WALL WASHER 13 IN 40 W - RGB, 120-240 V LCWW6-40W-20-RGB	p. 5
	LED WALL WASHER 44 IN 40 W - RGBW, 100-256 V LCWW5-40W44-15-RGBW	p. 7
	LED WALL WASHER 48 IN 36 W - RGBW, 120-240 V LCWW2-36W48-15-RGBW	p. 9
	LED WALL WASHER 48 IN 60 W - RGBW, 120-240 V LCWW1-60W48-15-RGBW	p. 11



THE ACCESSORIES



LCWWDMX-DEC3CH-12V



LCWWDMXCONT-3CH-12V

DRIVE WALL WASHERS AND LED CIRCUITS ON DMX512

The 3-channel DMX controller centralizes control of LED wall washers: up to 50 fixtures at once, to vary intensity, color and scenes with smooth transitions. The 3-channel DMX decoder converts the DMX512 signal into three independent outputs for low-voltage LED strips or fixtures; it connects through 3-pin XLR connectors.

FEATURES

- Standard DMX512 protocol
- Controller: up to 50 wall washers
- Controller: 3 channels
- Decoder: 3 independent outputs
- Decoder: 3-pin XLR connectors
- Compatible with each other

LCWWDMXCONT-3CH-12V · CONTROLLER

Power supply	12 V DC
Channels	3
Protocol	DMX512
Capacity	Up to 50 wall washers
Compatibility	Wall washers LCWW1, LCWW2, LCWW5, LCWW6

LCWWDMX-DEC3CH-12V · DECODER

Power supply	12 V DC
Input	DMX512 signal
Outputs	3 independent channels
Load	Low-voltage LED strips or fixtures
Connection	3-pin XLR connectors



ORDERING

Build the product code

1

Code

LCWWDMXCONT-3CH-12V controller

LCWWDMX-DEC3CH-12V decoder

EXAMPLE

LCWWDMXCONT-3CH-12V

3-channel DMX controller


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWWDMX-DEC3CH-12V	3-channel DMX512 decoder
LCWWDMXCONT-3CH-12V	3-channel DMX controller, up to 50 wall washers

The decoder is compatible with the 3-channel DMX controller, for installations that need more power and flexibility (published description).



DIMENSIONS: 330 × 150 × 210 MM (13 IN)

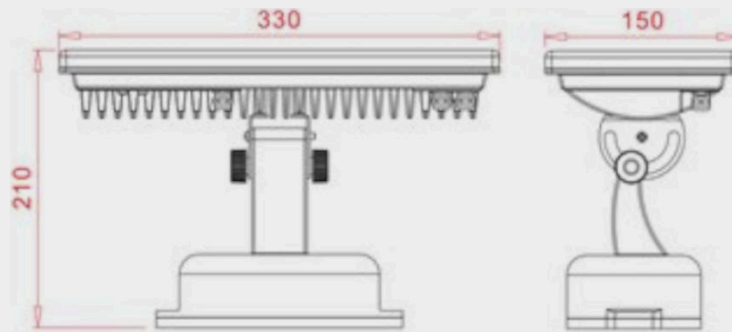

COMPACT RGB FLOOD ON AN ADJUSTABLE BASE

Compact rectangular 13 in LED wall washer, 36 RGB LEDs, to highlight facades, monuments, green walls and public spaces. It runs on its own (built-in programs selected with the buttons on the head), on DMX512 or in synchronized master/slave mode. 150° vertical rotation, IP65 rated.

FEATURES

- RGB: red, green, blue
- Standalone, DMX512, master/slave modes
- 36 LEDs, 40 W
- 150° vertical rotation
- IP65 · wet location
- cETLus, CE · 3-year warranty

ELECTRICAL

Voltage	120-240 V AC
Power	40 W
LED count	36
Control	Standalone, DMX512 (3 channels), master/slave
Ports	DMX ports A and B, power port

OPTICAL

Colors	RGB
Beam	20°
Rotation	150° (vertical)

PHYSICAL

Dimensions	330 × 150 × 210 mm
Weight	4.3 kg ± 5%
Housing	Aluminum alloy
Operating temperature	-20 °C to +40 °C
Lifespan	50,000 h
Certification	cETLus, CE
Warranty	3 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Series LCWW6 RGB flood	2 Power 40W 40 W	3 Beam 20 20°	4 Color RGB
--	--	-------------------------------------	-----------------------------------

EXAMPLE

LCWW6

-

40W

-

20

-

RGB

series

40 W

20°

RGB

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWW6-40W-20-RGB	Wall washer 13 in (330 mm), 40 W, RGB

ACCESSORIES


Code	Description	Sold
 LCWWDMXCONT-3CH-12V	3-channel DMX controller (up to 50 RGB wall washers)	each

3-channel DMX: red, green, blue (0-255 each). The fixture enters or leaves DMX mode automatically when it detects a valid signal. Master/slave: set the master address to 001 and the others as slaves; changing the master's function synchronizes the whole group. DMX control: see controller LCWWDMXCONT-3CH-12V.



DIMENSIONS: 1100 × 78 × 70 MM (44 IN) · BOTTOM OR SIDE MOUNTING

Unit: mm

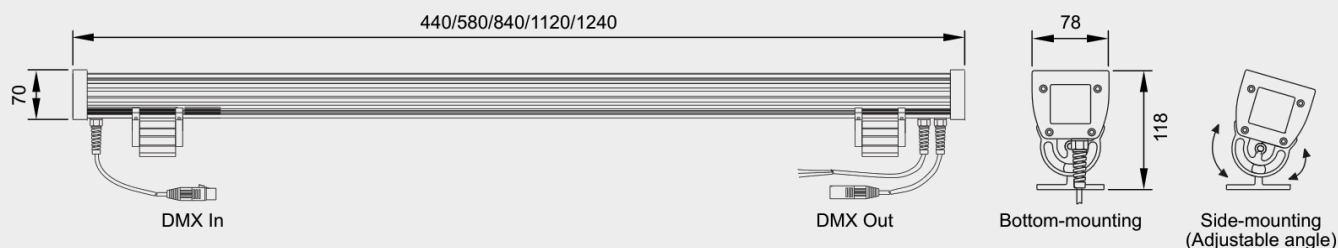

FACADE BAR, STANDALONE, DMX OR MASTER/SLAVE

44 in linear LED wall washer in 6063 aluminum, for architectural, decorative or event lighting of facades and walls. It runs on its own (built-in programs selected with the end-cap buttons), on DMX512 through an IP67 connector, or in synchronized master/slave mode. 140° rotation, bottom or side mounting, IP65 rated.

FEATURES

- Standalone, DMX512, master/slave modes
- 3- or 4-channel DMX
- IP67 DMX in / out connectors
- 140° rotation
- IP65 · wet location
- cETLus, CE · 3-year warranty

ELECTRICAL

Voltage	24 V DC / 100-256 V AC
Power	40 W
LEDs	36 × 1 W power LEDs (4-in-1)
Control	Standalone, DMX512, master/slave

OPTICAL

Colors	RGBW (red, green, blue, white)
Available beams	15° / 30° / 45°
Rotation	140°

PHYSICAL

Length	1100 mm (44 in)
Cross-section	78 × 70 mm (118 mm with bracket)
Housing	6063 aluminum
Operating temperature	-20 °C to +40 °C
Lifespan	50,000 h
Certification	cETLus, CE
Warranty	3 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Series LCWW5 facade bar	2 Power and length 40W44 40 W, 44 in	3 Beam 15 15°	4 Color RGBW
-------------------------------------	--	-------------------------	------------------------

EXAMPLE **LCWW5** - **40W44** - **15** - **RGBW**
 series 40 W, 44 in 15° RGBW

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWW5-40W44-15-RGBW	Wall washer 44 in (1100 mm), 40 W, RGBW, 15°

ACCESSORIES

Code	Description	Sold
 LCWWDMXCONT-3CH-12V	3-channel DMX controller (up to 50 RGB wall washers)	each

The former sheet also lists 17 in (440 mm), 23 in (580 mm), 33 in (840 mm) and 49 in (1240 mm): no active Zoho code for these lengths.
3-channel DMX: red, green, blue (0-255 each). 4-channel DMX: red, green, blue, white. The fixture enters or leaves DMX mode automatically when it detects a valid signal.


Master/slave: set the master address to 001 and the others as slaves; changing the master's function synchronizes the whole group.

DMX control: see controller LCWWDMXCONT-3CH-12V.



DIMENSIONS: 1218 × 38 × 80 MM (48 IN)

Unit: mm

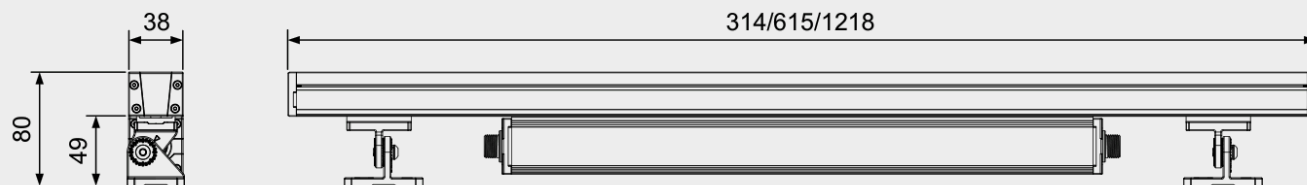

SLIM RGBW BAR UNDER GLASS, STEADY COLOR OR DMX

Slim 48 in linear LED wall washer, aluminum housing with glass cover, to highlight facades and architectural features. Red, green, blue and white in a single fixture, in steady color mode or driven by a DMX controller. 15° to 60° beam depending on the model, IP65 rated.

FEATURES

- RGBW: red, green, blue and white
- Steady color or DMX mode
- Slim profile: 38 × 80 mm
- Aluminum with glass cover
- IP65 · outdoor use
- cETLus, CE · 3-year warranty

ELECTRICAL

Voltage	120-240 V AC
Frequency	50/60 Hz
Power	36 W
LED count	24 or 36
Control	Steady color or DMX

OPTICAL

Colors	RGBW · white options: 2700K, 3000K, 4000K or 5700K
Available beams	15° / 30° / 45° / 60°
Rotation	172.5° / 105°

PHYSICAL

Dimensions	1218 × 38 × 80 mm
Weight	1.6 kg or 2.5 kg ± 5% (per LED count)
Housing	Aluminum alloy, glass cover
Operating temperature	-20 °C to +40 °C
Lifespan	50,000 h
Certification	cETLus, CE
Warranty	3 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Series LCWW2 slim RGBW bar	2 Power and length 36W48 36 W, 48 in	3 Beam 15 15°	4 Color RGBW
---	---	--------------------------------	-------------------------------

EXAMPLE	LCWW2	-	36W48	-	15	-	RGBW
	series		36 W, 48 in		15°		RGBW

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWW2-36W48-15-RGBW	Wall washer 48 in (1218 mm), 36 W, RGBW

ACCESSORIES

Code	Description	Sold
 LCWWDMXCONT-3CH-12V	3-channel DMX controller (up to 50 RGB wall washers)	each

The former sheet also lists 12 in (314 mm, 9 W) and 24 in (615 mm, 18 W): no active Zoho code for these lengths.


The 36 W can have 24 or 36 LEDs, which changes its weight (former sheet).

DMX mode: works with a DMX controller, offline or online. See controller LCWWDMXCONT-3CH-12V.



DIMENSIONS: 1220 × 55 × 130 MM (48 IN)

Unit: mm

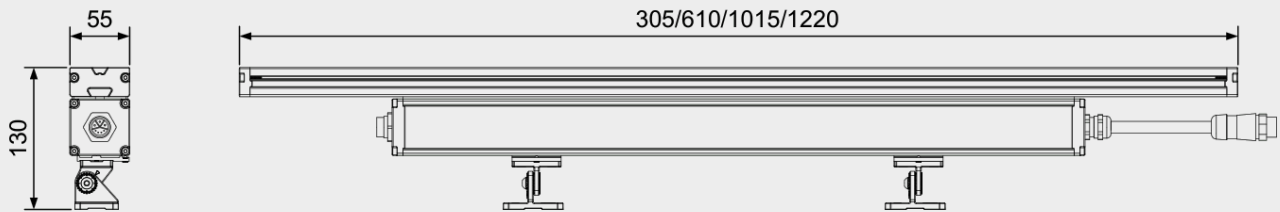

ADJUSTABLE RGBW BAR FOR FACADE WASHING

48 in linear LED wall washer in 6063 aluminum, to highlight facades, walls and architectural features. Red, green, blue and white in a single fixture, in steady color mode or driven by DMX512. 120-240 V AC input, 150° rotation on its brackets, IP65 rated.

FEATURES

- RGBW: red, green, blue and white
- Steady color or DMX512 mode
- 150° rotation
- 6063 aluminum housing
- IP65 · outdoor use
- cETLus, CE · 3-year warranty

ELECTRICAL

Voltage	120-240 V AC
Power	60 W
Control	Steady color or DMX512

OPTICAL

Colors	RGBW · white options: 2700K, 3000K, 4000K or 5700K
Beam	15 × 40° (asymmetric)
Rotation	150°

PHYSICAL

Dimensions	1220 × 55 × 130 mm
Weight	3.8 kg ± 5%
Housing	6063 aluminum
Operating temperature	-20 °C to +40 °C
Lifespan	50,000 h
Certification	cETLus, CE
Warranty	3 years

LOCATION RATING · IP65

✓ Dry

✓ Damp
(covered)

✓ Wet

ORDERING

Build the product code

1 Series LCWW1 RGBW bar	2 Power and length 60W48 60 W, 48 in	3 Beam 15 15 × 40° asymmetric	4 Color RGBW
--	---	--	-------------------------------

EXAMPLE	LCWW1	-	60W48	-	15	-	RGBW
	series		60 W, 48 in		15 × 40°		RGBW

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCWW1-60W48-15-RGBW	Wall washer 48 in (1220 mm), 60 W, RGBW

ACCESSORIES

Code	Description	Sold
 LCWWDMMXCONT-3CH-12V	3-channel DMX controller (up to 50 RGB wall washers)	each

The former sheet also lists 12 in (305 mm, 15 W, 1.2 kg), 24 in (610 mm, 30 W, 2.2 kg) and 40 in (1015 mm, 50 W, 3.0 kg): no active Zoho code for these lengths.

Steady color mode: connected directly to the power supply. DMX mode: standard DMX512 signal.

DMX control: see controller LCWWDMMXCONT-3CH-12V.