

2026 CATALOG

Pendant Lights

9 products



Updated October 4, 2026


TABLE OF CONTENTS

Pendant Lights

	BELL PENDANT LIGHT Ø 7 7/8 IN FOR ISLAND - E26 BASE LCSUSP-D-8IN-E26	p. 3
	BELL PENDANT LIGHT Ø 7 7/8 × 9 7/8 IN - E26 BASE LCSUSP-D-10IN-E26	p. 5
	DOME PENDANT LIGHT 20 IN 60 W MAX - 120 V LCSUSP-D-20IN-E26	p. 7
	LED BIDIRECTIONAL PENDANT LIGHT 4 FT 40 W - 3000K/4000K LCSUSP-UD-4FT-40W	p. 9
	LED CYLINDER PENDANT LIGHT 10-20 W - 3 CCT LCSUSP-SSLESC-20W-MV-3CCT-BK	p. 11
	LED HEXAGONAL CEILING LIGHT 534 W - 5000K LCFIX-HEXAGON14-WH	p. 13
	LED LINEAR PENDANT LIGHT 4 FT 24-50 W - 3 CCT LCSUSP-D-4FT-CCT	p. 15
	LED LINEAR PENDANT LIGHT 4 FT 40 W - 3000K/4000K LCSUSP-D-4FT-40W	p. 17
	LED LINEAR PENDANT LIGHT 4-8 FT 25-80 W - 3 CCT LCSUSP-*-3CCT-T	p. 19



DIMENSIONS: Ø 7 7/8 IN (200 MM) × 7 7/8 IN (200 MM) · HEIGHT ADJUSTABLE UP TO 1,800 MM



BLACK OUTSIDE, WHITE INSIDE, FOR KITCHEN ISLANDS

Bell pendant light, 7 7/8 in (200 mm) in diameter and height, for kitchen islands, hung from the ceiling by a cable. Black exterior finish with a white interior; round canopy. Overall height adjustable up to 70 7/8 in (1,800 mm). E26/E27 base: choose the bulb for the desired ambiance (bulb not included).

FEATURES

- Black finish, white interior
- Height adjustable up to 1,800 mm
- Suspension mount
- Round canopy
- E26 base (bulb not included)
- ETL

ELECTRICAL

Voltage	120 V
Base	E26 / E27
Bulb	Not included
Wiring	N: white wire · L: black wire

PHYSICAL

Diameter	7 7/8 in (200 mm)
Shade height	7 7/8 in (200 mm)
Canopy	Round, 4 3/4 in (120 mm)
Overall height	Adjustable up to 70 7/8 in (1,800 mm)
Finish	Black, white interior
Certification	ETL



ORDERING

Build the product code

1 Code

LCSUSP-D-8IN-E26

EXAMPLE	LCSUSP-D	-	8IN	-	E26
	pendant		Ø 7 7/8 in		E26 base


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCSUSP-D-8IN-E26	Bell Ø 7 7/8 × 7 7/8 in · black, white interior · E26 base

3-step installation: fix the crossbar to the electrical box, connect (N white wire, L black wire, ground), fix the canopy then screw in the bulb.



DIMENSIONS: Ø 7 7/8 IN (200 MM) × 9 7/8 IN (250 MM) · HEIGHT ADJUSTABLE UP TO 1,800 MM



BLACK OUTSIDE, WHITE INSIDE, FOR KITCHEN ISLANDS

Bell pendant light, 7 7/8 in in diameter and 9 7/8 in high, for kitchen islands, hung from the ceiling by a cable. Black exterior finish with a white interior; round canopy. Overall height adjustable up to 70 7/8 in (1,800 mm). E26/E27 base: choose the bulb for the desired ambiance (bulb not included).

FEATURES

- Black finish, white interior
- Height adjustable up to 1,800 mm
- Suspension mount
- Round canopy
- E26 base (bulb not included)
- ETL

ELECTRICAL

Voltage	120 V
Base	E26 / E27
Bulb	Not included
Wiring	N: white wire · L: black wire

PHYSICAL

Diameter	7 7/8 in (200 mm)
Shade height	9 7/8 in (250 mm)
Canopy	Round, 4 3/4 in (120 mm)
Overall height	Adjustable up to 70 7/8 in (1,800 mm)
Finish	Black, white interior
Certification	ETL



ORDERING

Build the product code

1

Code

LCSUSP-D-10IN-E26

EXAMPLE	LCSUSP-D	-	10IN	-	E26
	pendant		Ø 7 7/8 × 9 7/8 in		E26 base

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCSUSP-D-10IN-E26	Bell Ø 7 7/8 × 9 7/8 in · black, white interior · E26 base

3-step installation: fix the crossbar to the electrical box, connect (N white wire, L black wire, ground), fix the canopy then screw in the bulb.





DIMENSIONS: Ø 20 IN × 10 IN · ADJUSTABLE 60 IN SUSPENSION



A LARGE BLACK DOME FOR ISLANDS AND TABLES

20 in pendant ceiling light to highlight kitchen islands and work areas. Metal dome, black exterior and white interior finish. E26 socket for an A19 or ST19 bulb up to 60 W (bulb not included), 120 V. Indoor use; rated for damp locations.

FEATURES

- Ø 20 in metal dome
- Matte black, white interior
- E26 socket, A19 or ST19 bulb
- 60 W max. · 120 V
- Damp location (indoor)
- ETL · 2-year warranty

ELECTRICAL

Voltage	120 V
Socket	E26
Bulb	A19 or ST19, not included
Max. wattage	60 W

PHYSICAL

Shape	Dome (hemispherical)
Dimensions	Ø 20 in × 10 in
Suspension	60 in, adjustable
Material	Metal
Finish	Matte black, white interior
Location	Damp, indoor only
Certification	ETL
Warranty	2 years



LED PENDANT LIGHTS
DOME PENDANT LIGHT 20 IN 60 W MAX - 120 V
LCSUSP-D-20IN-E26

ORDERING

Build the product code

1 Code


LCSUSP-D-20IN-E26

EXAMPLE	LCSUSP-D	-	20IN	-	E26
	pendant		20 in		E26 socket


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCSUSP-D-20IN-E26	PLAFONNIER SUSPENDU 20" POUR ÎLOT/TABLE

Ceiling mount, pendant only. Downward light.

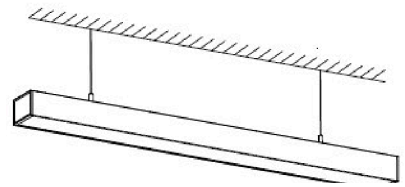

DIMENSIONS: L x W x H = 47.5 x 0.79 x 3.74 in



LIGHT DOWNWARD AND TOWARD THE CEILING, SLIM PROFILE

4 ft bidirectional LED linear pendant: 75% of the light downward, 25% toward the ceiling. Aluminum housing, aluminum or black finish, 40 W and 3,412 lm. Offered in 3000K or 4000K (black in 4000K only). Ships with a 60 in suspension cable to adjust the height; for dry locations.

FEATURES

- 25% uplight, 75% downlight
- Aluminum or black finish
- 3000K or 4000K
- 0-10 V dimming
- 60 in suspension cable
- Dry location · cETLus

ELECTRICAL

Voltage	120-260 V
Power	40 W
Equivalent	150 W
Dimming	0-10 V

OPTICAL

Flux	3,412 lm
Color temperature	3000K / 4000K
Beam angle	120°

PHYSICAL

Dimensions (L x W x H)	47.5 x 0.79 x 3.74 in
Housing	Aluminum
Finish	Aluminum, black (4000K)
Protection	IP20, dry location
Operating temperature	0 to 40 °C
Lifespan	50,000 h
Certification	cETLus
Warranty	5 years

ORDERING

Build the product code

1 Series LCSUSP-UD-4FT 4 ft bidirectional	2 Finish AL aluminum BK black	3 Power 40W 40 W	4 Color 30K 3000K 40K 4000K
---	--	-----------------------------------	--

EXAMPLE	LCSUSP-UD-4FT	-	AL	-	40W	-	30K
	4 ft bidirectional		aluminum		40 W		3000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCSUSP-UD-4FT-AL-40W-30K	Color : Aluminum · Color temperature : 3000K
LCSUSP-UD-4FT-AL-40W-40K	Color : Aluminum · Color temperature : 4000K
LCSUSP-UD-4FT-BK-40W-40K	Color : Black · Color temperature : 4000K

Suspension mount, suspension kit included: 60 in suspension cable, 60 in power cord.
 The black finish is offered in 4000K only.



DIMENSIONS: Ø 5.51 IN · OVERALL HEIGHT 21.50 IN · CANOPY 5.7 IN



IP65 BLACK CYLINDER, INDOOR OR OUTDOOR

Cylindrical pendant with a die-cast aluminum housing, black finish. Power and color temperature (3000K, 4000K, 5000K) are set on site. 120-347 V auto-sensing driver; IP65 for wet locations, from -40 °C to +40 °C. Polycarbonate lens with glass cover.

FEATURES

- Selectable power: 20 W or 10 W
- Selectable 3000K / 4000K / 5000K
- 120-347 V, auto-sensing
- IP65 · wet location
- Black die-cast aluminum
- cULus · 5-year warranty

ELECTRICAL

Voltage	120-347 V
Power	20 W / 10 W selectable
Dimming	0-10 V

OPTICAL

Color temperature	3000K / 4000K / 5000K
Flux	2,100 lm (20 W) · 1,050 lm (10 W)
Efficacy	105 lm/W
CRI	70
Beam angle	45°
Lens	Polycarbonate, glass cover

PHYSICAL

Housing	Die-cast aluminum
Finish	Black
Location	Wet, IP65
Operating temperature	-40 to +40 °C
Lifespan	50,000 h
Certification	cULus, DLC
Warranty	5 years



LED PENDANT LIGHTS

LED CYLINDER PENDANT LIGHT 10-20 W - 3 CCT

LCSUSP-SSLESC-20W-MV-3CCT-BK

ORDERING

Build the product code

1

Code

LCSUSP-SSLESC-20W-MV-3CCT-BK


EXAMPLE	LCSUSP-SSLESC	-	20W	-	MV	-	3CCT	-	BK
	cylinder pendant		20 W max		120-347 V		3 CCT		black

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCSUSP-SSLESC-20W-MV-3CCT-BK	LUMINAIRE SUSPENDU CYLINDRE NOIR 20W 3CCT

Dimensions per the drawing: cylinder Ø 5.51 in, canopy 5.7 in × 2.78 in, 13.50 in from canopy to cylinder, 21.50 in overall.





DIMENSIONS: 190 × 96 IN · 14 HEXAGONS OF 18 IN

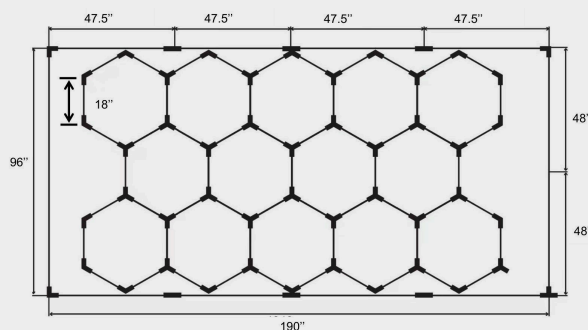

14 LIGHTED HEXAGONS TO ASSEMBLE, FOR GARAGES AND SHOWROOMS

A set of 14 LED hexagons framed by a rectangular border, for garages, showrooms, gyms, barber shops and stores. Cool white 5000K light, 534 W in total. The tubes are assembled with X- and Y-shaped connectors; fastened with zip ties to a grid ceiling or with screws to a flat ceiling.

FEATURES

- 14 hexagons, 190 × 96 in
- 5000K, 534 W total
- X- and Y-shaped connectors
- Grid or flat ceiling
- 120° beam
- ETL · 3-year warranty

ELECTRICAL

Total power	534 W
46 in tubes (1,175 mm)	16 W each
18 in tubes (440 mm)	6 W each
Voltage	100-277 V AC

OPTICAL

Color temperature	5000K
Efficacy	120 lm/W
CRI	> 80
Beam angle	120°

PHYSICAL

Dimensions	190 × 96 in
Tubes	22 mm wide
Housing	Polycarbonate, aluminum PCB
Protection	IP20, indoor
Operating temperature	-20 to 45 °C
Lifespan	50,000 h
Certification	ETL
Warranty	3 years



LED PENDANT LIGHTS
LED HEXAGONAL CEILING LIGHT 534 W - 5000K
LCFIX-HEXAGON14-WH

ORDERING

Build the product code

1 Code


LCFIX-HEXAGON14-WH

EXAMPLE **LCFIX-HEXAGON14** - **WH**
 14 hexagons white 5000K


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCFIX-HEXAGON14-WH	LUMINAIRE PLAFONNIER LED HEXAGONAL - 534W - 5000K (14 HEXS)

Contents: 12 × 46 in tubes (1,175 mm), 57 × 18 in tubes (440 mm), 27 × 120° Y connectors, 17 × 120° two-way connectors, 8 × 180° connectors, 3 × 90° connectors, 2 power cords, 60 anchors and screws, 4 nuts, 60 zip ties.
Installation by a professional. Check voltage and frequency before use.



DIMENSIONS: LENGTH 48 IN (1,219 MM)

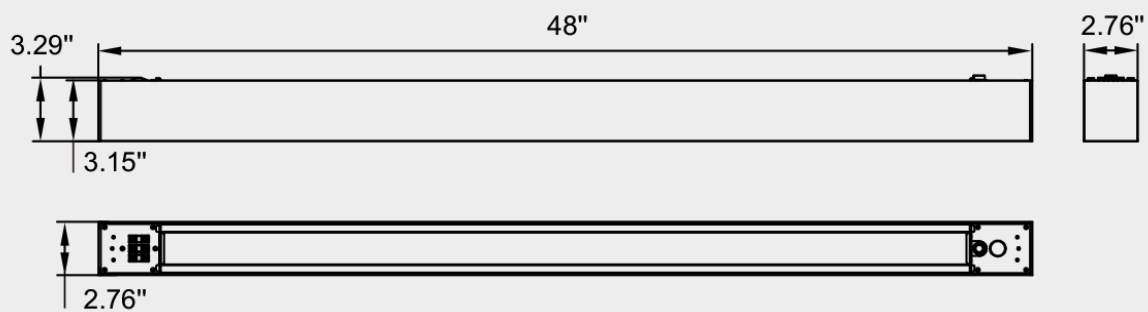

SELECTABLE POWER AND COLOR TEMPERATURE, UP TO 8 LINKED

4 ft LED linear pendant in aluminum, white, black or silver, for offices, conference rooms, stores and lobbies. A selector sets the power (24-32-40 W or 30-40-50 W) and the color temperature on 3 positions. 0-10 V dimming; up to 8 fixtures linked.

FEATURES

- 3-level selectable power
- 3500K / 4000K / 5000K selectable
- White, black or silver
- 0-10 V dimming
- Up to 8 fixtures linked
- cULus · 50,000 h lifespan

ELECTRICAL

Voltage	120-347 V
Power (40W)	24-32-40 W
Power (50W)	30-40-50 W
Dimming	0-10 V

OPTICAL

Flux (40W)	2,640-3,520-4,400 lm
Flux (50W)	3,300-4,400-5,500 lm
Color temperature	3500K / 4000K / 5000K
Beam angle	90°

PHYSICAL

Length	48 in (1,219 mm)
Housing	Aluminum
Finish	White, black, silver
Protection	IP44, damp location
Operating temperature	-20 to 45 °C
Lifespan	50,000 h
Certification	cULus
Warranty	5 years

ORDERING

Build the product code



1 Series LCSUSP-D-4FT 4 ft linear	2 Finish WH white BK black SL silver	3 Max. power 40W 24-32-40 W 50W 30-40-50 W	4 Color CCT 3500K / 4000K / 5000K
---	--	---	---

EXAMPLE	LCSUSP-D-4FT	-	WH	-	40W	-	CCT
	4 ft linear		white		40 W max		3 CCT


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCSUSP-D-4FT-BK-40W-CCT	Wattage : 40W · Color : Black
LCSUSP-D-4FT-BK-50W-CCT	Wattage : 50W · Color : Black
LCSUSP-D-4FT-SL-40W-CCT	Wattage : 40W · Color : Silver
LCSUSP-D-4FT-SL-50W-CCT	Wattage : 50W · Color : Silver
LCSUSP-D-4FT-WH-40W-CCT	Wattage : 40W · Color : White
LCSUSP-D-4FT-WH-50W-CCT	Wattage : 50W · Color : White

Installations shown on the former sheet: steel wire rope suspension, canopy suspension and linked installation.
Do not cover with thermal insulation. Installation by a qualified electrician.

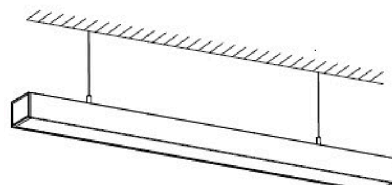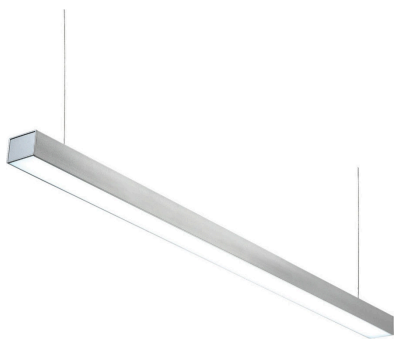

DIMENSIONS: L × W × H = 48.0 × 2.5 × 2.0 in



SLIM ALUMINUM PROFILE, UNIFORM LIGHT

4 ft slim-profile LED linear pendant. Aluminum housing, aluminum or black finish, 40 W and 3,200 lm. Offered in 3000K or 4000K (black in 4000K only). Ships with a 60 in suspension cable to adjust the height; suitable for damp locations.

FEATURES

- Slim aluminum profile
- Aluminum or black finish
- 3000K or 4000K
- 0-10 V dimming compatible
- 60 in suspension cable
- Damp location · cETLus

ELECTRICAL

Voltage	120-260 V
Power	40 W
Equivalent	150 W
Dimming	0-10 V

OPTICAL

Flux	3,200 lm
Color temperature	3000K / 4000K
Beam angle	120°

PHYSICAL

Dimensions (L × W × H)	48.0 × 2.5 × 2.0 in
Housing	Aluminum
Finish	Aluminum, black (4000K)
Protection	IP40, damp location
Operating temperature	0 to 40 °C
Lifespan	50,000 h
Certification	cETLus
Warranty	5 years

ORDERING

Build the product code

1 Series LCSUSP-D-4FT 4 ft direct	2 Finish AL aluminum BK black	3 Power 40W 40 W	4 Color 30K 3000K 40K 4000K
--	--	-----------------------------------	--


EXAMPLE	LCSUSP-D-4FT	-	AL	-	40W	-	30K
	4 ft direct		aluminum		40 W		3000K

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCSUSP-D-4FT-AL-40W-30K	Color : Aluminum · Color temperature : 3000K
LCSUSP-D-4FT-AL-40W-40K	Color : Aluminum · Color temperature : 4000K
LCSUSP-D-4FT-BK-40W-40K	Color : Black · Color temperature : 4000K

Suspension mount, suspension kit included: 60 in suspension cable, 70 in power cord.
 The black finish is offered in 4000K only.

3CCT Selectable / Multi-wattage
(3000K/3500K/4000K) / (25W/33W/40W)

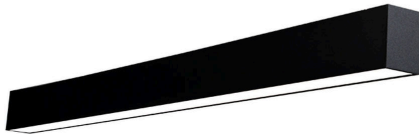

DIMENSIONS: SECTION 60 × 85 MM (2.36 × 3.35 IN) · 4 FT 1,200 MM · 8 FT 2,390 MM



DIRECT OR DIRECT/INDIRECT, FIELD-SELECTABLE POWER AND COLOR

LED linear pendant in 60 × 85 mm extruded aluminum, 4 ft or 8 ft, black or white finish, for offices, meeting rooms, classrooms, stores and lobbies. Direct lighting (downward) or direct/indirect (also toward the ceiling). Power and color temperature (3000K, 3500K, 4000K) are selected at installation; 0-10 V dimmable down to 1%, 120-347 V.

FEATURES

- 4 ft or 8 ft · black or white
- Direct or direct/indirect
- Field-selectable power
- Selectable 3000K / 3500K / 4000K
- 0-10 V dimmable to 1% · 120-347 V
- ETL · DLC Premium · 5-year warranty

ELECTRICAL

Voltage	120-347 V
Direct power 4 ft	25-33-40 W (measured 24-32-39 W)
Direct power 8 ft	50-66-80 W (measured 48-63-79 W)
Uplight (dir./ind.)	22-28-33 W (4 ft) · 44-56-66 W (8 ft)
Dimming	0-10 V down to 1%

OPTICAL

Color temperature	3000K / 3500K / 4000K
Flux	up to 5,000 lm (4 ft) · 10,000 lm (8 ft)
Efficacy	130 lm/W
CRI	80+
Lens	Frosted polycarbonate, Lambertian

PHYSICAL

Length	1,200 mm (47.24 in) · 2,390 mm (94.09 in)
Section	60 × 85 mm (2.36 × 3.35 in)
Housing	Extruded aluminum 6063-T5
Finish	Powder coat, black or white
Location	Damp
Certification	ETL, FCC, DLC Premium
Warranty	5 years

ORDERING

Build the product code

1 Lighting D direct UD direct/indirect	2 Length and power 4FT-40W 4 ft, 25-33-40 W 8FT-80W 8 ft, 50-66-80 W	3 Finish BK black WH white	4 Color 3CCT-T 3000K / 3500K / 4000K
---	---	---	---

EXAMPLE	LCSUSP-D - 4FT-40W - BK - 3CCT-T
	direct 4 ft, 40 W max black 3 CCT

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCSUSP-D-4FT-BK-40W-3CCT-T	Finish : Black · Type : Direct · Length : 4 pieds
LCSUSP-D-4FT-WH-40W-3CCT-T	Type : Direct · Finish : White · Length : 4 pieds
LCSUSP-D-8FT-BK-80W-3CCT-T	Type : Direct · Finish : Black · Length : 8 pieds
LCSUSP-D-8FT-WH-80W-3CCT-T	Type : Direct · Finish : White · Length : 8 pieds
LCSUSP-UD-4FT-BK-40W-3CCT-T	Type : Direct/indirect · Finish : Black · Length : 4 pieds
LCSUSP-UD-4FT-WH-40W-3CCT-T	Type : Direct/indirect · Finish : White · Length : 4 pieds
LCSUSP-UD-8FT-BK-80W-3CCT-T	Type : Direct/indirect · Finish : Black · Length : 8 pieds
LCSUSP-UD-8FT-WH-80W-3CCT-T	Type : Direct/indirect · Finish : White · Length : 8 pieds

Ships with two 6 ft galvanized steel suspension cables (1.5 mm, 1/16 in) with adjustable grippers and a preinstalled 6 ft 18/5 STW 600 V power cord with quick connector.

Continuous row mounting: joiner kit included; 6 A max. per power feed (beyond that, add a feed).

Die-cast aluminum end caps. In direct/indirect, the down and up outputs are adjusted independently.

Special order: our team confirms the lead time when ordering.