


2026 CATALOG

Towel Warmers

9 products

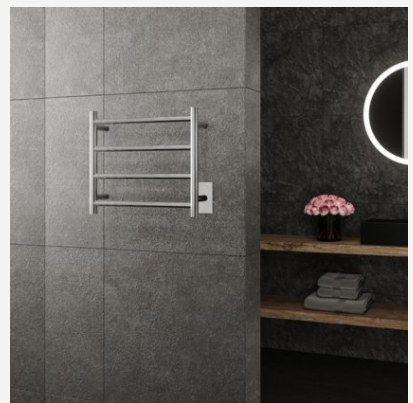

Updated October 4, 2026


TABLE OF CONTENTS

Towel Warmers

	12 FLAT-BAR TOWEL WARMER 500 W - HARDWIRED LCTW-MICH12 + MIBK12	p. 3
	12-BAR TOWEL WARMER 19.3 × 26.8 IN 400 W - HARDWIRED LCTW-HEBK12 + HEWH12	p. 5
	15-BAR TOWEL WARMER 12.5 × 63 IN 400 W - HARDWIRED LCTW-ERCH63 + ERGD63 + ERBK63	p. 7
	17 CURVED-BAR TOWEL WARMER 500 W - HARDWIRED LCTW-THBK17 + THCH17 + THWH17	p. 9
	17-BAR TOWEL WARMER 500 W - HARDWIRED LCTW-EOWH17 + EOCH17 + EOBK17 + EOGD17	p. 11
	4-BAR TOWEL WARMER 21 × 18 IN 50 W - HARDWIRED LCTW-ARCH04 + ARBK04 + ARGD04	p. 13
	43-TUBE TOWEL WARMER 23.5 × 63 IN 800 W - HARDWIRED LCTW-ATWH43	p. 15
	8-BAR TOWEL WARMER 23.6 × 55.1 IN 185 W - HARDWIRED LCTW-RHCH08 + RHBK08 + RHGD08	p. 17
	LOOP TOWEL WARMER 47-59 IN 80-100 W - HARDWIRED LCTW-CLBK47 + CLWH59 + CLBK59	p. 19



DIMENSIONS: 19.69 × 47.6 × 2.44 IN (50 × 121 × 6.2 CM)



12 FLAT BARS, 47.6 IN HIGH

47.6 in wall-mounted towel warmer with 12 wide flat bars, 120 V, 500 W. No switch: it is wired to a wall switch, with no visible wires. Available in chrome or black.

FEATURES

- 12 flat bars
- 47.6 in high
- 500 W · 1,706 BTU/h
- Hardwired 120 V, on a wall switch
- Chrome or black
- UL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	500 W
Heat output	1,706 BTU/h (500 W × 3.412)
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	No switch: wire to a wall switch
Surface temperature	100-160 °F (38-71 °C)

PHYSICAL

Dimensions (W × H × D)	19.69 × 47.6 × 2.44 in
Bars	12, flat
Finish	Chrome, black
Material	Stainless steel
Mounting	Wall, 4 color-matched brackets

CERTIFICATION

Certification	UL (tested and compliant)
Ingress protection	IP44
Warranty	5 years



12 FLAT-BAR TOWEL WARMER 500 W - HARDWIRED

LCTW-MICH12 · MIBK12

ORDERING

Build the product code


1 Series LCTW-MI flat bars	2 Finish CH chrome BK black	3 Bars 12 12 bars
--------------------------------------	--	-----------------------------

EXAMPLE	LCTW-MI	-	CH	-	12
	flat bars		chrome		12 bars


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-MIBK12	Black · 12 flat bars · 19.69 × 47.6 in · 500 W
LCTW-MICH12	Chrome · 12 flat bars · 19.69 × 47.6 in · 500 W

Installation by an electrician, on a junction box (installation guide).
Care: when off, soft dry cloth; never cleaning agents or abrasives.



DIMENSIONS: 49 × 68 CM (19.3 × 26.8 IN)



12 BARS ON TWO CENTRAL UPRIGHTS

26.8 in high wall-mounted towel warmer: 12 bars in 4 groups of 3, on two central uprights. 120 V, 400 W, hardwired with no visible wires. Available in white or black.

FEATURES

- 12 bars in 4 groups of 3
- Two central uprights
- 400 W · 1,365 BTU/h
- Hardwired 120 V, no visible wires
- White or black
- ETL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	400 W
Heat output	1,365 BTU/h (400 W × 3.412)
Connection	Hardwired, no visible wires
Max. surface temperature	90-110 °F (32-43 °C) per ambient

PHYSICAL

Dimensions (W × H × D)	19.3 × 26.8 × 2.44 in
Bars	12 (4 groups of 3)
Finish	White, black
Mounting	Wall, color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Warranty	5 years



ORDERING

Build the product code

1 Series

LCTW-HE central uprights

2 Finish

BK black

WH white

3 Bars


12 12 bars

EXAMPLE


LCTW-HE - **BK** - **12**
central uprights black 12 bars

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-HEBK12	Black · 12 bars · 19.3 × 26.8 in · 400 W
LCTW-HEWH12	White · 12 bars · 19.3 × 26.8 in · 400 W



DIMENSIONS: 31.8 × 160 CM (12.5 × 63 IN) · U SECTION 21 CM



15 U-SHAPED BARS, 63 IN HIGH

Narrow 63 in wall-mounted towel warmer: 15 U-shaped bars wrap around the towel. 120 V, 400 W, hardwired with no visible wires. Available in chrome, black or gold.

FEATURES

- 15 U-shaped bars
- Narrow: 12.5 in wide
- 400 W · 1,365 BTU/h
- Hardwired 120 V, no visible wires
- Chrome, black or gold
- ETL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	400 W
Heat output	1,365 BTU/h (400 W × 3.412)
Connection	Hardwired, no visible wires
Max. surface temperature	90-110 °F (32-43 °C) per ambient

PHYSICAL

Dimensions (W × H × D)	12.5 × 63 × 8.3 in
Bars	15, U-shaped
Finish	Chrome, black, gold
Mounting	Wall, color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Warranty	5 years



15-BAR TOWEL WARMER 12.5 × 63 IN 400 W - HARDWIRED

LCTW-ERCH63 · ERGD63 · ERBK63

ORDERING

Build the product code

1 Series

LCTW-ER U-shaped bars

2 Finish

CH chrome

BK black

GD gold


3 Height

63 63 in


EXAMPLE **LCTW-ER** - **CH** - **63**
 U bars chrome 63 in

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-ERBK63	Black · 15 bars · 12.5 × 63 in · 400 W
LCTW-ERCH63	Chrome · 15 bars · 12.5 × 63 in · 400 W
LCTW-ERGD63	Gold · 15 bars · 12.5 × 63 in · 400 W



DIMENSIONS: 50 × 160 CM (19.7 × 63 IN)



17 CURVED BARS, 63 IN HIGH

63 in wall-mounted towel warmer with 17 forward-curved bars in three groups. 120 V, 500 W, hardwired with no visible wires, on a wall switch. Available in black, chrome or white.

FEATURES

- 17 curved bars
- 63 in high, 2 in deep
- 500 W · 1,706 BTU/h
- Hardwired 120 V, no visible wires
- Black, chrome or white
- UL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	500 W
Heat output	1,706 BTU/h (500 W × 3.412)
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	No switch: wire to a wall switch
Surface temperature	100-160 °F (38-71 °C)

PHYSICAL

Dimensions (W × H × D)	19.7 × 63 × 2 in
Bars	17, curved
Finish	Black, chrome, white
Material	Stainless steel
Mounting	Wall, 4 color-matched brackets

CERTIFICATION

Certification	UL (tested and compliant)
Ingress protection	IP44
Warranty	5 years

**17 CURVED-BAR TOWEL WARMER 500 W - HARDWIRED**

LCTW-THBK17 · THCH17 · THWH17

ORDERING

Build the product code

1 Series**LCTW-TH** curved bars**2 Finish****BK** black
CH chrome
WH white**3 Bars****17** 17 bars

EXAMPLE

LCTW-TH - BK - 17

curved bars black 17 bars

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-THBK17	Black · 17 curved bars · 19.7 × 63 in · 500 W
LCTW-THCH17	Chrome · 17 curved bars · 19.7 × 63 in · 500 W
LCTW-THWH17	White · 17 curved bars · 19.7 × 63 in · 500 W

Installation by an electrician, on a junction box (installation guide).

Care: when off, soft dry cloth; never cleaning agents or abrasives.



DIMENSIONS: 50 × 160 CM (19.7 × 63 IN) · DEPTH 4 CM



17 STRAIGHT BARS, 63 IN HIGH

63 in wall-mounted towel warmer with 17 straight bars in three groups, 120 V, 500 W. Hardwired, with no visible wires. 1.6 in deep; available in white, chrome, black or gold.

FEATURES

- 17 straight bars
- 63 in high, 1.6 in deep
- 500 W · 1,706 BTU/h
- Hardwired 120 V, no visible wires
- White, chrome, black or gold
- UL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	500 W
Heat output	1,706 BTU/h (500 W × 3.412)
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	No switch: wire to a wall switch
Surface temperature	100-160 °F (38-71 °C)

PHYSICAL

Dimensions (W × H × D)	19.7 × 63 × 1.6 in
Bars	17, straight
Finish	White, chrome, black, gold
Material	Stainless steel
Mounting	Wall, 4 color-matched brackets

CERTIFICATION

Certification	UL (tested and compliant)
Ingress protection	IP44
Warranty	5 years



17-BAR TOWEL WARMER 500 W - HARDWIRED

LCTW-EOWH17 · EOCH17 · EOBK17 · EOGD17

ORDERING

Build the product code

1 Series

LCTW-E0 straight bars

2 Finish

WH white
CH chrome
BK black
GD gold

3 Bars

17 17 bars

EXAMPLE LCTW-E0 - WH - 17
straight bars white 17 bars

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCTW-E0BK17	Black · 17 bars · 19.7 × 63 in · 500 W
LCTW-E0CH17	Chrome · 17 bars · 19.7 × 63 in · 500 W
LCTW-E0GD17	Gold · 17 bars · 19.7 × 63 in · 500 W
LCTW-EOWH17	White · 17 bars · 19.7 × 63 in · 500 W

Installation by an electrician, on a junction box (installation guide).

Care: when off, soft dry cloth; never cleaning agents or abrasives.



DIMENSIONS: 54 × 45 CM (21.3 × 17.7 IN) · DEPTH 12 CM



COMPACT, 4 BARS, SWITCH WITH INDICATOR LIGHT

Compact 4-bar wall-mounted towel warmer for the bathroom, 120 V, 50 W. The hardwired connection leaves no visible wires. Color-matched metal brackets; available in chrome, black or gold.

FEATURES

- 4 bars, compact size
- 50 W · 164 BTU
- On/off switch with indicator light
- Hardwired 120 V, no visible wires
- Chrome, black or gold
- ETL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	50 W
Heat output	164 BTU
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	On/off switch with indicator light
Surface temperature	100-110 °F (38-43 °C)

PHYSICAL

Dimensions (W × H × D)	21.3 × 17.7 × 4.7 in
Bars	4
Finish	Chrome, black, gold
Material	Stainless steel
Mounting	Wall, color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Ingress protection	IP44
Warranty	5 years

ORDERING

Build the product code

1 Series LCTW-AR 4 bars	2 Finish CH chrome BK black GD gold	3 Bars 04 4 bars
--	--	-----------------------------------

EXAMPLE	LCTW-AR	-	CH	-	04
	compact		chrome		4 bars


PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-ARBK04	Black · 4 bars · 21 × 18 in · 50 W
LCTW-ARCH04	Chrome · 4 bars · 21 × 18 in · 50 W
LCTW-ARGD04	Gold · 4 bars · 21 × 18 in · 50 W
LCTW-ARTEMIS-BK	Black · 4 bars · same product as LCTW-ARBK04

Care: when off, soft dry cloth; never cleaning agents or abrasives.



DIMENSIONS: 60 × 160 CM (23.5 × 63 IN)



43 TUBES IN AN ARC, WHITE FINISH

63 in high wall-mounted towel warmer: 43 tubes of decreasing length draw an arc. 120 V, 800 W, hardwired with no visible wires. White finish, color-matched metal brackets.

FEATURES

- 43 tubes in an arc
- 63 in high
- 800 W · 2,730 BTU/h
- Hardwired 120 V, no visible wires
- White finish
- ETL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	800 W
Heat output	2,730 BTU/h (800 W × 3.412)
Connection	Hardwired, no visible wires
Max. surface temperature	90-110 °F (32-43 °C) per ambient

PHYSICAL

Dimensions (W × H × D)	23.5 × 63 × 8.3 in
Tubes	43 × Ø 2.2 cm
Uprights	2 × Ø 3.5 cm
Shape	Arc
Finish	White
Mounting	Wall, color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Warranty	5 years



ORDERING

Build the product code

1 Series

LCTW-AT 43 tubes

2 Finish

WH white

3 Tubes

43 43 tubes


EXAMPLE **LCTW-AT** - **WH** - **43**
 arc white 43 tubes

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-ATWH43	White · 43 tubes · 23.5 × 63 in · 800 W



DIMENSIONS: 60 × 140 CM (23.6 × 55.1 IN)



8 CANTILEVERED BARS, 55 IN HIGH

55 in wall-mounted towel warmer: 8 bars held on one side only, on two uprights, so the towel slides in from the open side. 120 V, 185 W, hardwired to a wall switch. Available in chrome, black or gold.

FEATURES

- 8 bars open on one side
- 55 in high
- 185 W · 631 BTU/h
- Hardwired 120 V, on a wall switch
- Chrome, black or gold
- ETL tested · 5-year warranty

ELECTRICAL

Voltage	120 V AC
Power	185 W (1.515 A)
Heat output	631 BTU/h (185 W × 3.412)
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	No switch: wire to a wall switch
Surface temperature	100-110 °F (38-43 °C)

PHYSICAL

Dimensions (W × H × D)	23.6 × 55.12 × 3.46 in
Bars	8, open on one side
Finish	Chrome, black, gold
Material	Stainless steel
Weight	5.3 kg (11.7 lb)
Mounting	Wall, 4 color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Ingress protection	IP44
Warranty	5 years



8-BAR TOWEL WARMER 23.6 × 55.1 IN 185 W - HARDWIRED

LCTW-RHCH08 · RHBK08 · RHGD08

ORDERING

Build the product code

1 Series

LCTW-RH open bars

2 Finish

CH chrome

BK black

GD gold

3 Bars

08 8 bars

EXAMPLE **LCTW-RH** - **CH** - **08**
 open bars chrome 8 bars

PRODUCT RANGE — ALL ACTIVE CODES


Code	Description
LCTW-RHBK08	Black · 8 bars · 23.6 × 55.12 in · 400 W
LCTW-RHCH08	Chrome · 8 bars · 23.6 × 55.12 in · 400 W
LCTW-RHGD08	Gold · 8 bars · 23.6 × 55.12 in · 400 W

Installation by an electrician, on a junction box (installation guide).

Care: when off, soft dry cloth; never cleaning agents or abrasives.



59 IN MODEL DIMENSIONS: 30 × 150 CM (11.8 × 59.1 IN)



ONE LOOPED TUBE, 47 OR 59 IN HIGH

Wall-mounted towel warmer made of one looped tube, very slim (1.38 in). Two heights: 47 in (80 W) and 59 in (100 W), 120 V. No switch: it is wired to a wall switch.

FEATURES

- One looped tube
- 1.38 in deep
- 47 in: 80 W · 59 in: 100 W
- Hardwired 120 V, on a wall switch
- White or black
- ETL tested

ELECTRICAL

Voltage	120 V AC
Power	80 W (47 in) · 100 W (59 in)
Heat output	287 BTU (47 in) · 341 BTU/h (59 in, 100 W × 3.412)
Connection	Hardwired, no visible wires
Wiring	3 wires: live, neutral, ground
Control	No switch: wire to a wall switch
Surface temperature	100-110 °F (38-43 °C)

PHYSICAL

47 in (W × H × D)	11.81 × 47.24 × 1.38 in
59 in (W × H × D)	11.81 × 59.06 × 1.38 in
Shape	Looped tube
Finish	White, black
Material	Stainless steel
Mounting	Wall, color-matched brackets

CERTIFICATION

Certification	ETL (tested and compliant)
Ingress protection	IP44
Warranty	5 years



ORDERING

Build the product code

1 Series

LCTW-CL loop

2 Finish

WH white

BK black

3 Height

47 47 in (black)

59 59 in

EXAMPLE

LCTW-CL

-

BK

-

59

loop

black

59 in

PRODUCT RANGE — ALL ACTIVE CODES

Code	Description
LCTW-CLBK47	Black · 47 in · 11.81 × 47.24 in · 80 W
LCTW-CLBK59	Black · 59 in · 11.81 × 59.06 in · 100 W
LCTW-CLWH59	White · 59 in · 11.81 × 59.06 in · 100 W

47 in: black only.
Care: when off, soft dry cloth; never cleaning agents or abrasives.

