

2026 CATALOG

# Wall Lights

11 products




Updated October 4, 2026


## TABLE OF CONTENTS

## Wall Lights


|                                                                                     |                                                                                  |              |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------|
|    | <b>LED CUBE WALL LIGHT ADJUSTABLE 2 × 5 W - 3000K</b><br>LCMUR-UD-10W-30K-P      | <b>p. 3</b>  |
|    | <b>LED CYLINDER WALL LIGHT 10 IN 2 × 10 W - 3000K</b><br>LCMUR-10-UD-30K-LC      | <b>p. 5</b>  |
|    | <b>LED CYLINDER WALL LIGHT 13 IN 2 × 6 W - 3000K</b><br>LCMUR-LUVIA-B            | <b>p. 7</b>  |
|    | <b>LED CYLINDER WALL LIGHT 14 IN 2 × 9 W - 3000K</b><br>LCMUR-14-UD-30K-L        | <b>p. 9</b>  |
|    | <b>LED CYLINDER WALL LIGHT 18 IN 2 × 15 W - 4000K</b><br>LCMUR-18-UD-40K-L       | <b>p. 11</b> |
|    | <b>LED CYLINDER WALL LIGHT 8 IN 9 W - 3000K</b><br>LCMUR-8-D-30K-L               | <b>p. 13</b> |
|   | <b>LED HALF-MOON WALL LIGHT 6 W - 3000K</b><br>LCMUR-EXIL-BK-B                   | <b>p. 15</b> |
|  | <b>LED UNIT NUMBER LIGHT 7 W / 15 W - 5 CCT</b><br>LCMUR-NUM-5CCT-T              | <b>p. 17</b> |
|  | <b>LED VANITY LIGHT ROUND 24 IN 24 W - 5 CCT</b><br>LCMUR-SDB-24W-5CCT-UV-2FT-R  | <b>p. 19</b> |
|  | <b>LED VANITY LIGHT SQUARE 24 IN 24 W - 5 CCT</b><br>LCMUR-SDB-24W-5CCT-UV-2FT-S | <b>p. 21</b> |
|  | <b>OUTDOOR LED CYLINDER 20 W / 40 W - 120-347 V</b><br>LCMUR-CYL-MW-3CCT-UV-BK-T | <b>p. 23</b> |



Manually Adjust The Luminous Angle



DIMENSIONS: 100 × 100 × 100 MM

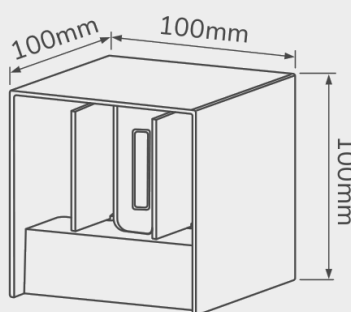**AN UP/DOWN CUBE WITH AN ADJUSTABLE BEAM**

Square die-cast aluminum LED wall light that lights both upward and downward. The beam opening adjusts to highlight a specific feature of the wall. Two 5 W integrated LED sources, 1,000 lumens in total at 3000K. IP65 rated, for indoor and outdoor use.

**FEATURES**

- Up and down lighting
- Adjustable beam
- 2 × 5 W, 1,000 lm total
- 3000K, CRI 80
- Die-cast aluminum, IP65
- 100-277 V

**ELECTRICAL**

|                   |              |
|-------------------|--------------|
| Voltage           | 100-277 V AC |
| Power             | 2 × 5 W      |
| Power factor      | ≥ 0.9        |
| Driver efficiency | 85%          |

**OPTICAL**

|                   |                  |
|-------------------|------------------|
| Flux              | 1,000 lm (total) |
| Efficacy          | 100 lm/W         |
| Color temperature | 3000K            |
| CRI               | 80               |
| Beam              | Adjustable       |

**PHYSICAL**

|                       |                          |
|-----------------------|--------------------------|
| Dimensions            | L 100 × W 100 × H 100 mm |
| Material              | Die-cast aluminum        |
| Finish                | Black                    |
| Operating temperature | -20 °C to +60 °C         |
| IP rating             | IP65                     |
| Location              | Damp                     |
| Warranty              | 3 years                  |

**LOCATION RATING · IP65**

Dry

Damp  
(covered)

Wet



# LED CUBE WALL LIGHT ADJUSTABLE 2 × 5 W - 3000K

LED WALL LIGHTS  
LCMUR-UD-10W-30K-P

## ORDERING

Build the product code

### 1 Code

LCMUR-UD-10W-30K-P

EXAMPLE


**LCMUR-UD-10W-30K-P**

example


## PRODUCT RANGE — ALL ACTIVE CODES

| Code               | Description                             |
|--------------------|-----------------------------------------|
| LCMUR-UD-10W-30K-P | LUMINAIRE MURAL LED EXTÉRIEUR AJUSTABLE |

The beam adjusts by opening or closing the top and bottom shutters (see the adjustment range on the former sheet).

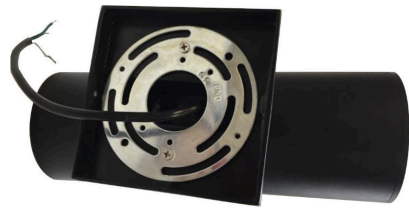

DIMENSIONS: Ø 3.55 IN (90 MM) × 10.20 IN (260 MM)



### LIGHT UPWARD AND DOWNWARD

10 in cylindrical outdoor LED wall light that casts light both upward and downward. Two 10 W integrated LED sources, 1,800 lumens in total at 3000K. Sturdy aluminum base and sealed protective glass, IP65 rated. For entrances, patios or paths.

### FEATURES

- Up and down lighting
- 2 × 10 W, 1,800 lm total
- 3000K, CRI 80
- 30° beam
- 100-277 V, TRIAC dimmable
- IP65 · ETL

### ELECTRICAL

|              |                |
|--------------|----------------|
| Voltage      | 100-277 V AC   |
| Power        | 2 × 10 W (COB) |
| Power factor | 0.9            |
| Dimming      | TRIAC (120 V)  |

### OPTICAL

|                   |                  |
|-------------------|------------------|
| Flux              | 1,800 lm (total) |
| Color temperature | 3000K            |
| CRI               | 80               |
| Beam angle        | 30°              |
| Distribution      | Up and down      |

### PHYSICAL

|               |                    |
|---------------|--------------------|
| Dimensions    | Ø 90 × H 260 mm    |
| Wall plate    | 4.50 × 4.50 in     |
| Materials     | Aluminum and glass |
| Finish        | Black              |
| Location      | Damp               |
| Lifespan      | 50,000 h           |
| Certification | ETL, cETL          |
| Warranty      | 3 years            |

### LOCATION RATING · IP65

✓ Dry

✓ Damp  
(covered)

✗ Wet



LED WALL LIGHTS  
**LED CYLINDER WALL LIGHT 10 IN 2 × 10 W - 3000K**  
LCMUR-10-UD-30K-LC

**ORDERING**

Build the product code

**1 Code**

**LCMUR-10-UD-30K-LC**

EXAMPLE

**LCMUR-10-UD-30K-LC**

example


**PRODUCT RANGE — ALL ACTIVE CODES**

| Code                      | Description                                        |
|---------------------------|----------------------------------------------------|
| <b>LCMUR-10-UD-30K-LC</b> | LUMINAIRE MURAL LED EXTÉRIEUR 10" (BIDIRECTIONNEL) |

The former sheet also mentions indoor use and a base that fits a junction box.  
Similar models: 8 in (downward), 14 in and 18 in up/down.



**DIMENSIONS: 11.4 × 33.7 × 13.3 CM (4 1/2 × 13 1/4 × 5 1/4 IN)**



### AN UP/DOWN CYLINDER WITH CLEAR ENDS

Cylindrical outdoor LED wall light, offered in black or stainless steel, with clear acrylic shades at both ends. It lights both upward and downward: 12 W in total, two 6 W sources, 940 lumens at 3000K. Approved for damp locations.

### FEATURES

- Up and down lighting
- 2 × 6 W, 940 lm total
- 3000K, CRI 80+
- Clear acrylic shades
- Black or stainless steel
- Damp location approved

### ELECTRICAL

|         |                                          |
|---------|------------------------------------------|
| Power   | 2 × 6 W (12 W)                           |
| Source  | 2 GU10 LED lamps, included               |
| Dimming | Yes                                      |
| Wiring  | Live, neutral, ground, on a junction box |

### OPTICAL

|                   |                  |
|-------------------|------------------|
| Flux              | 940 lm (total)   |
| Color temperature | 3000K            |
| CRI               | 80 +             |
| Distribution      | Up and down      |
| Lifespan          | 30,000 h (lamps) |

### PHYSICAL

|               |                                                    |
|---------------|----------------------------------------------------|
| Dimensions    | 11.4 × 33.7 × 13.3 cm<br>4 1/2 × 13 1/4 × 5 1/4 in |
| Wall plate    | 11.4 cm (4 1/2 in)                                 |
| Finish        | Black (BK) or stainless (SS)                       |
| Shade         | Clear acrylic                                      |
| Location      | Damp                                               |
| Certification | CSA (Canada, US)                                   |



LED WALL LIGHTS

# LED CYLINDER WALL LIGHT 13 IN 2 × 6 W - 3000K

LCMUR-LUVIA-B

ORDERING

Build the product code

|                                                             |                                                                 |                                  |
|-------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------|
| <div>1 Series</div> <div>LCMUR-LUVIA up/down cylinder</div> | <div>2 Finish</div> <div>BK black</div> <div>SS stainless</div> | <div>3 Suffix</div> <div>B</div> |
|-------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------|

|         |                  |   |       |   |        |
|---------|------------------|---|-------|---|--------|
| EXAMPLE | LCMUR-LUVIA      | - | BK    | - | B      |
|         | up/down cylinder |   | black |   | suffix |

PRODUCT RANGE — ALL ACTIVE CODES


| Code             | Description   |
|------------------|---------------|
| LCMUR-LUVIA-BK-B | Color : Black |
| LCMUR-LUVIA-SS-B | Color : Inox  |

Vertical mounting only, more than 1.2 m (4 ft) above the ground (manufacturer's guide).





DIMENSIONS: Ø 108 MM (4 1/4 IN) × 350 MM (13 3/4 IN)



### LIGHT UPWARD AND DOWNWARD

13 3/4 in (14 in size) cylindrical outdoor LED wall light that lights both upward and downward. Two 9 W integrated LED sources, 800 lumens each way (1,600 lm in total) at 3000K. Sturdy aluminum base and sealed protective glass. Approved for damp locations.

### FEATURES

- Up and down lighting
- 2 × 9 W, 1,600 lm total
- 3000K
- Integrated LED, 120 V
- Sealed protective glass
- Damp location approved

### ELECTRICAL

|         |                               |
|---------|-------------------------------|
| Voltage | 120 V                         |
| Power   | 2 × 9 W, integrated LED (DOB) |
| Dimming | Not dimmable                  |

### OPTICAL

|                   |                         |
|-------------------|-------------------------|
| Flux              | 800 lm up + 800 lm down |
| Color temperature | 3000K                   |
| Distribution      | Up and down             |

### PHYSICAL

|               |                             |
|---------------|-----------------------------|
| Diameter      | 108 mm (4 1/4 in)           |
| Height        | 350 mm (13 3/4 in)          |
| Projection    | 175 mm (6 7/8 in)           |
| Wall plate    | 110 mm (4 3/8 in)           |
| Materials     | Aluminum base, sealed glass |
| Finish        | Black                       |
| Location      | Damp                        |
| Certification | ETL                         |
| Warranty      | 3 years                     |



LED WALL LIGHTS  
**LED CYLINDER WALL LIGHT 14 IN 2 × 9 W - 3000K**  
LCMUR-14-UD-30K-L

**ORDERING**

Build the product code

**1 Code**

LCMUR-14-UD-30K-L

EXAMPLE

**LCMUR-14-UD-30K-L**

example


**PRODUCT RANGE — ALL ACTIVE CODES**

| Code              | Description                                        |
|-------------------|----------------------------------------------------|
| LCMUR-14-UD-30K-L | LUMINAIRE MURAL LED EXTÉRIEUR 14" (BIDIRECTIONNEL) |

Similar models: 8 in (downward), 10 in and 18 in up/down.



DIMENSIONS: Ø 145 MM (5 3/4 IN) × 457 MM (18 IN)



### THE LARGE UP/DOWN CYLINDER FOR FAÇADES

18 in cylindrical outdoor LED wall light that lights both upward and downward. Two 15 W integrated LED sources, 1,350 lumens in total. Sturdy aluminum base and sealed protective glass. Approved for damp locations: entrances, façades, patios.

### FEATURES

- Up and down lighting
- 2 × 15 W, 1,350 lm total
- 4000K (code 40K)
- Integrated LED, 120 V
- Sealed protective glass
- Damp location approved

### ELECTRICAL

|         |                                |
|---------|--------------------------------|
| Voltage | 120 V                          |
| Power   | 2 × 15 W, integrated LED (DOB) |
| Dimming | Not dimmable                   |

### OPTICAL

|                   |                  |
|-------------------|------------------|
| Flux              | 1,350 lm (total) |
| Color temperature | 4000K            |
| Distribution      | Up and down      |

### PHYSICAL

|               |                             |
|---------------|-----------------------------|
| Diameter      | 145 mm (5 3/4 in)           |
| Height        | 457 mm (18 in)              |
| Projection    | 211 mm (8 3/8 in)           |
| Wall plate    | 110 mm (4 3/8 in)           |
| Materials     | Aluminum base, sealed glass |
| Finish        | Black                       |
| Location      | Damp                        |
| Certification | ETL                         |
| Warranty      | 3 years                     |



LED WALL LIGHTS  
**LED CYLINDER WALL LIGHT 18 IN 2 × 15 W - 4000K**  
LCMUR-18-UD-40K-L

**ORDERING**

Build the product code

**1 Code**

**LCMUR-18-UD-40K-L**

EXAMPLE

**LCMUR-18-UD-40K-L**

example


**PRODUCT RANGE — ALL ACTIVE CODES**

| Code                     | Description                                        |
|--------------------------|----------------------------------------------------|
| <b>LCMUR-18-UD-40K-L</b> | LUMINAIRE MURAL LED EXTÉRIEUR 18" (BIDIRECTIONNEL) |

Similar models: 8 in (downward), 10 in and 14 in up/down.



DIMENSIONS: Ø 108 MM (4 1/4 IN) × 200 MM (7 7/8 IN)



### A CLEAN CYLINDER THAT LIGHTS DOWNWARD

Cylindrical outdoor LED wall light, 7 7/8 in high (8 in size), that casts light downward along the wall. Sturdy aluminum base and sealed protective glass. 9 W integrated LED source, 720 lumens at 3000K. Approved for damp locations: entrances, patios or walkways.

### FEATURES

- Downward lighting
- 9 W, 720 lm, 3000K
- Integrated LED, 120 V
- Aluminum base
- Sealed protective glass
- Damp location approved

### ELECTRICAL

|         |                           |
|---------|---------------------------|
| Voltage | 120 V                     |
| Power   | 9 W, integrated LED (DOB) |
| Dimming | Not dimmable              |

### OPTICAL

|                   |          |
|-------------------|----------|
| Flux              | 720 lm   |
| Color temperature | 3000K    |
| Distribution      | Downward |

### PHYSICAL

|               |                             |
|---------------|-----------------------------|
| Diameter      | 108 mm (4 1/4 in)           |
| Height        | 200 mm (7 7/8 in)           |
| Projection    | 175 mm (6 7/8 in)           |
| Wall plate    | 110 mm (4 3/8 in)           |
| Materials     | Aluminum base, sealed glass |
| Finish        | Black                       |
| Location      | Damp                        |
| Certification | ETL                         |
| Warranty      | 3 years                     |

## ORDERING

Build the product code

### 1 Code

LCMUR-8-D-30K-L

EXAMPLE

**LCMUR-8-D-30K-L**

example


## PRODUCT RANGE — ALL ACTIVE CODES

| Code            | Description                      |
|-----------------|----------------------------------|
| LCMUR-8-D-30K-L | LUMINAIRE MURAL LED EXTÉRIEUR 8" |

Similar models: 10 in, 14 in and 18 in up/down (separate sheets).



**DIMENSIONS: 16.5 × 16.5 × 10.2 CM (6 1/2 × 6 1/2 × 4 IN)**

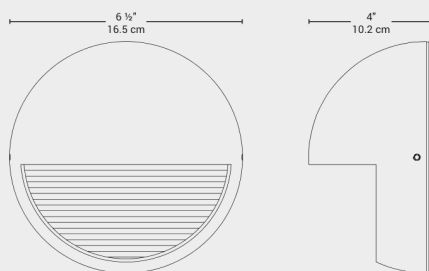

### SOFT LIGHT DIRECTED DOWNWARD

Round outdoor LED wall light with a black shade that directs light downward and spreads it along the wall. 6 W integrated LED source, 400 lumens at 3000K. Approved for wet locations: entrances, patios or paths.

### FEATURES

- Downward lighting
- 6 W, 400 lm, 3000K
- Integrated LED, included
- Black frame and shade
- Compact 6 1/2 in
- Wet location approved

### ELECTRICAL

|         |                          |
|---------|--------------------------|
| Voltage | 120 V                    |
| Power   | 6 W (total)              |
| Source  | Integrated LED, included |

### OPTICAL

|                   |          |
|-------------------|----------|
| Flux              | 400 lm   |
| Color temperature | 3000K    |
| Distribution      | Downward |
| Lifespan          | 30,000 h |

### PHYSICAL

|               |                       |
|---------------|-----------------------|
| Dimensions    | 16.5 × 16.5 × 10.2 cm |
|               | 6 1/2 × 6 1/2 × 4 in  |
| Frame finish  | Black                 |
| Shade finish  | Black                 |
| Location      | Wet                   |
| Certification | ETL                   |

## ORDERING

Build the product code

### 1 Code

LCMUR-EXIL-BK-B



EXAMPLE

**LCMUR-EXIL-BK-B**

example

## PRODUCT RANGE — ALL ACTIVE CODES

| Code            | Description                             |
|-----------------|-----------------------------------------|
| LCMUR-EXIL-BK-B | Half-moon wall light 6 W, 3000K · black |

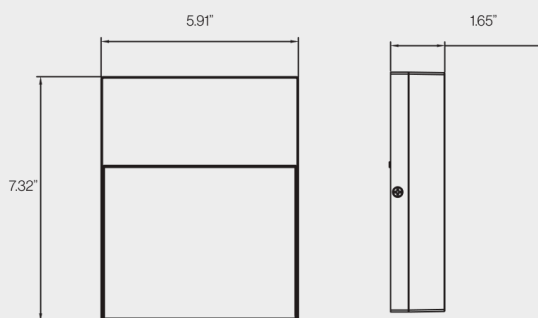**5CCT Selectable / 0-10V Dimmable**  
(2700K/3000K/3500K/4000K/5000K)**DIMENSIONS: 5.91 × 7.32 × 1.65 IN****A READABLE ADDRESS, DAY AND NIGHT**

LED fixture that lights the address number of a house, a condo door, a hotel room or a residence. Slim die-cast aluminum housing, IP65 rated for indoor and outdoor use. Ships with number and letter stickers, an applicator and alignment tools: the number is composed on site.

**FEATURES**

- Number and letter stickers included
- Applicator and alignment tools
- 5 CCT: 2700K to 5000K
- 0-10 V dimmable · CRI 90
- IP65: indoor and outdoor
- Black or white

**ELECTRICAL**

|         |                            |
|---------|----------------------------|
| Voltage | 120 V                      |
| Power   | 7 W (white) · 15 W (black) |
| Dimming | 0-10 V                     |

**OPTICAL**

|                   |                                       |
|-------------------|---------------------------------------|
| Flux              | 350 lm                                |
| Color temperature | 2700K / 3000K / 3500K / 4000K / 5000K |
| CRI               | 90                                    |

**PHYSICAL**

|                       |                        |
|-----------------------|------------------------|
| Dimensions            | 5.91 × 7.32 × 1.65 in  |
| Housing               | Die-cast aluminum      |
| Finish                | Black or white         |
| Mounting              | Octagon electrical box |
| Operating temperature | -20 °C to 40 °C        |
| Lifespan              | 50,000 h               |
| Certification         | ETL                    |
| Warranty              | 5 years                |

**LOCATION RATING · IP65**

✓ Dry

✓ Damp  
(covered)

✓ Wet

## ORDERING

Build the product code

|                                                 |                                              |                                                                                         |                             |
|-------------------------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------|
| <b>1 Series</b><br><b>LCMUR-NUM</b> unit number | <b>2 Color</b><br><b>5CCT</b> 2700K to 5000K | <b>3 Finish</b><br><b>BK</b> black (white stickers)<br><b>WH</b> white (black stickers) | <b>4 Suffix</b><br><b>T</b> |
|-------------------------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------|

|         |                  |   |             |   |           |   |          |
|---------|------------------|---|-------------|---|-----------|---|----------|
| EXAMPLE | <b>LCMUR-NUM</b> | - | <b>5CCT</b> | - | <b>BK</b> | - | <b>T</b> |
|         | unit number      |   | 5 CCT       |   | black     |   | suffix   |

## PRODUCT RANGE — ALL ACTIVE CODES


| Code                       | Description    |
|----------------------------|----------------|
| <b>LCMUR-NUM-5CCT-BK-T</b> | Finish : Black |
| <b>LCMUR-NUM-5CCT-WH-T</b> | Finish : White |

Included: number and letter stickers, applicator, alignment tool for 2 or 4 digits and for 1, 3 or 5 digits, 2 screws, 3 wire nuts.  
 Installation: apply the number with the alignment tools, screw the plate to the box, select the CCT on the switch, connect (black-black, white-white, green-green), then seal the base with silicone.  
 Special order: our team gives you the lead time when you order.

**5CCT Selectable**  
(2700K/30K/35K/40K/50K)



**DIMENSIONS (L × W × H): 24 × 2.55 × 3.54 IN**

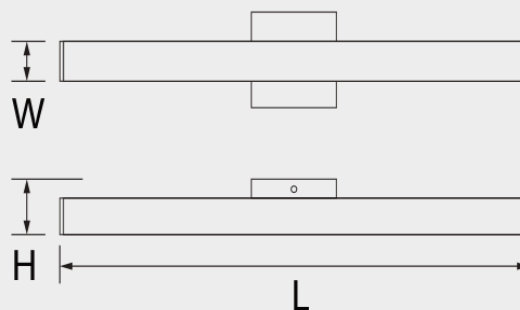

#### ABOVE THE VANITY OR AS A WALL SCNCE

Round 24 in LED bathroom light, to mount above a vanity or as a wall sconce. 24 W, 1,700 lumens, 150° beam and five selectable color temperatures, CRI 90. ELV and TRIAC dimmable, 120 V, approved for damp locations. A square version is also offered.

#### FEATURES

- 24 W, 1,700 lm
- 5 CCT: 2700K to 5000K
- CRI 90, 150° beam
- ELV and TRIAC dimmable
- Black or brushed nickel
- Damp location · ETL

#### ELECTRICAL

|         |               |
|---------|---------------|
| Voltage | 120 V         |
| Power   | 24 W          |
| Dimming | ELV and TRIAC |

#### OPTICAL

|                   |                                       |
|-------------------|---------------------------------------|
| Flux              | 1,700 lm                              |
| Color temperature | 2700K / 3000K / 3500K / 4000K / 5000K |
| CRI               | 90                                    |
| Beam angle        | 150°                                  |

#### PHYSICAL

|                       |                         |
|-----------------------|-------------------------|
| Length                | 24 in (2 ft)            |
| L × W × H             | 24 × 2.55 × 3.54 in     |
| Shape                 | Round                   |
| Finish                | Black or brushed nickel |
| Mounting              | Octagon junction box    |
| Operating temperature | -20 °C to +40 °C        |
| Location              | Damp                    |
| Lifespan              | 50,000 h                |
| Certification         | ETL                     |



LED WALL LIGHTS

LED VANITY LIGHT ROUND 24 IN 24 W - 5 CCT

LCMUR-SDB-24W-5CCT-UV-2FT-R

ORDERING

Build the product code

|                                                                            |                                       |                                                                      |
|----------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------|
| <div>1 Series</div> <div>LCMUR-SDB-24W-5CCT-UV-2FT 24 W, 5 CCT, 2 ft</div> | <div>2 Shape</div> <div>R round</div> | <div>3 Finish</div> <div>BK black</div> <div>BS brushed nickel</div> |
|----------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------|

|         |                           |   |       |   |       |
|---------|---------------------------|---|-------|---|-------|
| EXAMPLE | LCMUR-SDB-24W-5CCT-UV-2FT | - | R     | - | BK    |
|         | 24 W, 5 CCT, 2 ft         |   | round |   | black |

PRODUCT RANGE — ALL ACTIVE CODES

| Code                           | Description                           |
|--------------------------------|---------------------------------------|
| LCMUR-SDB-24W-5CCT-UV-2FT-R-BK | Round · 24 W · 5 CCT · black          |
| LCMUR-SDB-24W-5CCT-UV-2FT-R-BS | Round · 24 W · 5 CCT · brushed nickel |

Installation: on an octagon junction box (not included); mounting bracket, 2 canopy screws and 3 wire nuts included. Connect white-white, black-black, green to ground.


Dimmers tested by the manufacturer (1 fixture): Lutron S-600, 153P, RRD-10ND, DVCL-153P, AY-600P, CTCL-153P, TGCL-153P, S-603PG, LGCL-153PL, LG-603P, D-600P, D-600PH-DK, MACL-153M, CTELV-303P, DVELV-300P, DV-600P, SELV-300P; Leviton 6681, 6613-P, IPI06-1LZ, VPE06, 6674.



**5CCT Selectable**  
(2700K/30K/35K/40K/50K)



**DIMENSIONS (L × W × H): 24 × 1.89 × 2.56 IN**

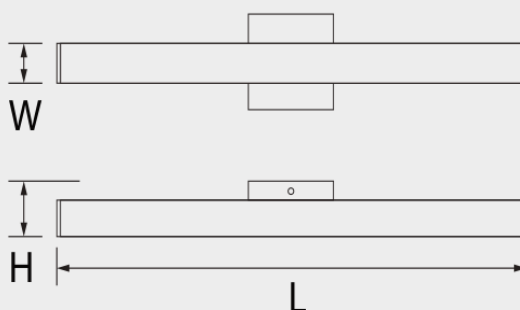

#### ABOVE THE VANITY OR AS A WALL SCNCE

Square 24 in LED bathroom light, to mount above a vanity or as a wall sconce. 24 W, 1,700 lumens, 150° beam and five selectable color temperatures, CRI 90. ELV and TRIAC dimmable, 120 V, approved for damp locations. A round version is also offered.

#### FEATURES

- 24 W, 1,700 lm
- 5 CCT: 2700K to 5000K
- CRI 90, 150° beam
- ELV and TRIAC dimmable
- Black or brushed nickel
- Damp location · ETL

#### ELECTRICAL

|         |               |
|---------|---------------|
| Voltage | 120 V         |
| Power   | 24 W          |
| Dimming | ELV and TRIAC |

#### OPTICAL

|                   |                                       |
|-------------------|---------------------------------------|
| Flux              | 1,700 lm                              |
| Color temperature | 2700K / 3000K / 3500K / 4000K / 5000K |
| CRI               | 90                                    |
| Beam angle        | 150°                                  |

#### PHYSICAL

|                       |                         |
|-----------------------|-------------------------|
| Length                | 24 in (2 ft)            |
| L × W × H             | 24 × 1.89 × 2.56 in     |
| Shape                 | Square                  |
| Finish                | Black or brushed nickel |
| Mounting              | Octagon junction box    |
| Operating temperature | -20 °C to +40 °C        |
| Location              | Damp                    |
| Lifespan              | 50,000 h                |
| Certification         | ETL                     |



# LED VANITY LIGHT SQUARE 24 IN 24 W - 5 CCT

LCMUR-SDB-24W-5CCT-UV-2FT-S

## ORDERING

Build the product code

### 1 Series

**LCMUR-SDB-24W-5CCT-UV-2FT** 24 W, 5 CCT, 2 ft

### 2 Shape

**S** square

### 3 Finish

**BK** black

**BS** brushed nickel

EXAMPLE

**LCMUR-SDB-24W-5CCT-UV-2FT - S - BK**

24 W, 5 CCT, 2 ft

square

black

## PRODUCT RANGE — ALL ACTIVE CODES

| Code                                  | Description                            |
|---------------------------------------|----------------------------------------|
| <b>LCMUR-SDB-24W-5CCT-UV-2FT-S-BK</b> | Square · 24 W · 5 CCT · black          |
| <b>LCMUR-SDB-24W-5CCT-UV-2FT-S-BS</b> | Square · 24 W · 5 CCT · brushed nickel |


Installation: on an octagon junction box (not included); mounting bracket, 2 canopy screws and 3 wire nuts included. Connect white-white, black-black, green to ground.

Dimmers tested by the manufacturer (1 fixture): Lutron S-600, 153P, RRD-10ND, DVCL-153P, AY-600P, CTCL-153P, TGCL-153P, S-603PG, LGCL-153PL, LG-603P, D-600P, D-600PH-DK, MACL-153M, CTELV-303P, DVELV-300P, DV-600P, SELV-300P; Leviton 6681, 6613-P, IPI06-1LZ, VPE06, 6674.

**3CCT Selectable / Multi-wattage**  
(3000K/4000K/5000K) / (10W/15W/20W)



#### DIMENSIONS (IN): CEILING · WALL UP/DOWN · WALL

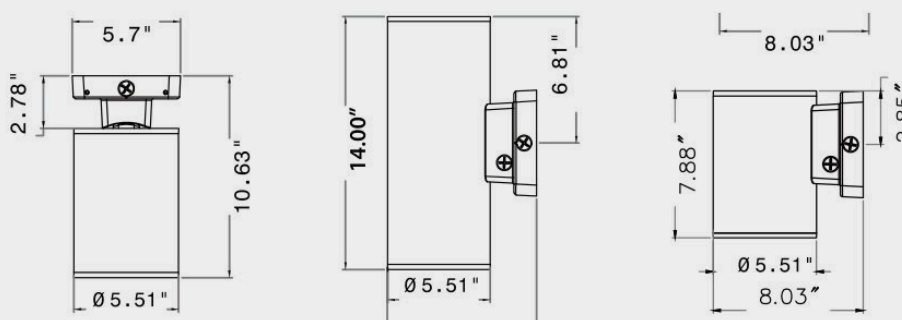

#### CEILING, WALL OR UP/DOWN, WITH PHOTOCELL

Outdoor LED cylinder for the façades, entrances, columns and soffits of homes, hotels, restaurants and stores. Three models: ceiling 20 W, wall 20 W and wall up/down 40 W. Field-selectable wattage and color temperature, built-in photocell and 0-10 V dimming. Black die-cast aluminum housing, IP65 rated.

#### FEATURES

- 3 models: ceiling, wall, up/down
- Field-selectable wattage
- 3CCT: 3000K, 4000K, 5000K
- Built-in photocell · 0-10 V
- 120-347 V ·  $\geq 105$  lm/W
- IP65 · -40 °C to 40 °C

#### ELECTRICAL

|                       |                                 |
|-----------------------|---------------------------------|
| Voltage               | 120-347 V                       |
| Power (ceiling, wall) | 10-15-20 W                      |
| Power (up/down)       | 40 W U/D · 20 W U/D, down or up |
| Control               | Built-in photocell              |
| Dimming               | 0-10 V                          |

#### OPTICAL

|                   |                       |
|-------------------|-----------------------|
| Flux (20 W)       | 1,200 to 2,400 lm     |
| Flux (40 W)       | Up to 4,800 lm        |
| Efficacy          | $\geq 105$ lm/W       |
| Color temperature | 3000K / 4000K / 5000K |
| CRI               | $\geq 70$             |
| Beam angle        | 45°                   |

#### PHYSICAL

|                       |                                                       |
|-----------------------|-------------------------------------------------------|
| Ceiling               | $\varnothing 5.51 \times 10.63$ in                    |
| Wall                  | $\varnothing 5.51 \times 7.88$ in, 8.03 in projection |
| Up/down               | $\varnothing 5.51 \times 14$ in, 8.03 in projection   |
| Housing               | Die-cast aluminum, black                              |
| Lens                  | Polycarbonate, glass cover                            |
| Operating temperature | -40 °C to 40 °C                                       |
| Lifespan              | 50,000 h                                              |
| Certification         | UL, FCC, RoHS                                         |
| Warranty              | 5 years                                               |

#### LOCATION RATING · IP65

✓ Dry

✓ Damp  
(covered)

✓ Wet



ORDERING

Build the product code

1 Code

LCMUR-CYL-C-20W-MW-3CCT-UV-BK-T  
LCMUR-CYL-UD-40W-MW-3CCT-UV-BK-T  
LCMUR-CYL-W-20W-MW-3CCT-UV-BK-T

EXAMPLE

LCMUR-CYL-C-20W-MW-3CCT-UV-BK-T

example

PRODUCT RANGE — ALL ACTIVE CODES

| Code                             | Description                                     |
|----------------------------------|-------------------------------------------------|
| LCMUR-CYL-C-20W-MW-3CCT-UV-BK-T  | Ceiling · 10-15-20 W · 3CCT · photocell · black |
| LCMUR-CYL-UD-40W-MW-3CCT-UV-BK-T | Wall up/down · 40 W · 3CCT · photocell · black  |
| LCMUR-CYL-W-20W-MW-3CCT-UV-BK-T  | Wall · 10-15-20 W · 3CCT · photocell · black    |

Wattage and CCT: DIP switches on the side, under waterproof plugs. Factory setting: 4000K, 20 W (single) or 40 W (up/down) — manufacturer's instructions.

0-10 V dimming: violet (DIM+) and pink (DIM-) wires; 120 to 347 V AC, 50 or 60 Hz supply.

Mounting: mounting plate screwed to a junction box; caulk the top and sides against the wall, never the bottom (moisture drain).

Special order: our team gives you the lead time when you order.

