

Fixed track mounted on the ceiling surface, directly on the electrical box, with **2, 3 or 4 adjustable GU10 heads**. Read the whole guide before you start.

⚠ WARNING


- **Shut off the power** to the wires you are working on: remove the fuse or turn off the circuit breaker. Turning the power off with the light switch is **not sufficient** to prevent electrical shock.
- **Do not install** or use the fixture if any part is missing or damaged. Contact your dealer for replacement or missing parts.
- For **ceiling mounting only**.
- **Caution — hot surface!** The fixture is hot when the power is on: wait **at least 5 min** after turning the power off before touching it.

SPECIFICATIONS

Model	Size (L × W × H)	Voltage	Base	Housing	Finish
LCTL-SM-GU10-2H (2 heads)	20 × 4.72 × 6.5 in	120 V	GU10	Iron	Black / white
LCTL-SM-GU10-3H (3 heads)	30 × 4.72 × 6.5 in	120 V	GU10	Iron	Black / white

The 4-head size (LCTL-SM-GU10-4H) installs the same way; its dimensions are in its spec sheet.

PARTS

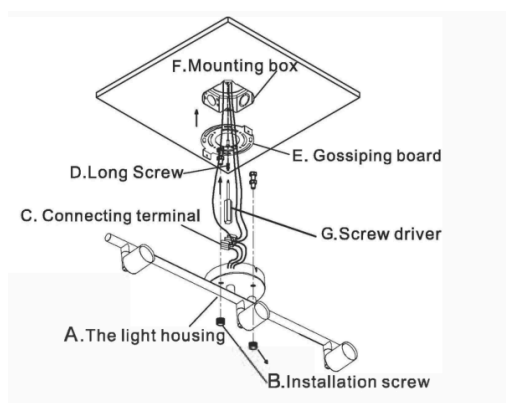

KEY


Key	Description
A	Light housing
B	Installation screws
C	Connecting terminals
D	Long screws
E	Mounting plate
F	Mounting (electrical) box
G	Screwdriver
H	Light bulb (not included)
I	Plastic auxiliary suction cup

INSTALLATION

- 1 Place the mounting plate (**E**) on the mounting box (**F**), align the installation holes and insert the screws. Adjust the direction of the plate (**E**), then use the screwdriver (**G**) to tighten the long screws (**D**) on the mounting box (**F**).
- 2 Take the **line, neutral** and **ground** wires of the supply out of the mounting box (**F**), then connect them to the corresponding line, neutral and ground wires of the fixture at the connecting terminals (**C**).
- 3 Put the connecting terminals (**C**) in the mounting box (**F**). Align the mounting holes of the light housing (**A**) and the mounting plate (**E**), place the installation screws (**B**) in the corresponding holes and tighten them with the screwdriver (**G**).



INSTALLATION (CONTINUED)

- 4 Pick up the light bulb **(H)** with the plastic suction cup **(I)**, fit it into the GU10 socket, then twist the head to the desired position. Power on after completing the installation steps.

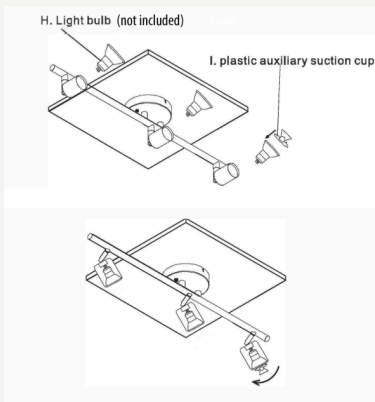

Top: H, light bulb (not included) · I, plastic auxiliary suction cup. Bottom: aim each head.

DIMENSIONS

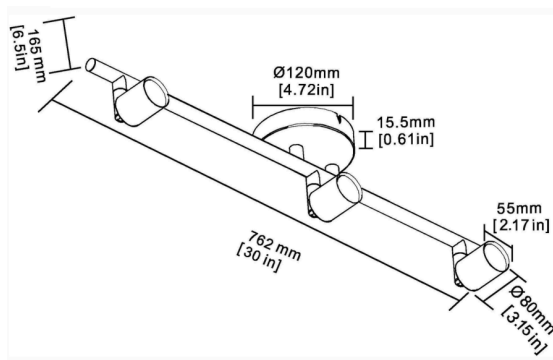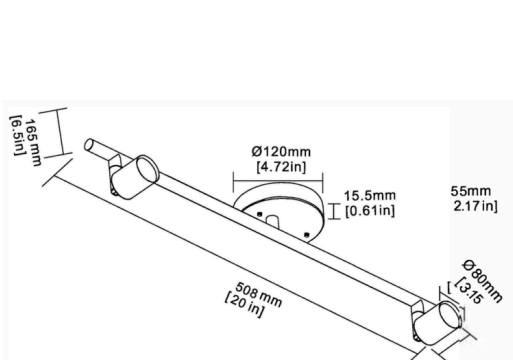

Left: 2 heads, length 508 mm [20 in] · right: 3 heads, length 762 mm [30 in]. Both: height 165 mm [6.5 in], canopy Ø 120 mm [4.72 in] and 15.5 mm [0.61 in] thick, head Ø 80 mm [3.15 in] and 55 mm [2.17 in] long.