

Glass LED wall pack with **selectable colour temperature and wattage** by DIP switches. Read the whole guide before you start.


HARDWARE INCLUDED



PARTS


Part	Description	Qty
AA	Knob terminal blocks	5
BB	Mounting cushion	1

COLOUR TEMPERATURE (CCT)



DIP switch positions: 3000K · 4000K · 5000K. **Default setting: 4000K.**


WATTAGE




DIP switch positions of the LCWPSTD-120W: 75 W · 90 W · 105 W · 120 W. **Default setting: 120 W.** The LCWPSTD-60W offers 4 wattages: 30, 40, 50 and 60 W.

INSTALLATION


- 1 **Open** the lamp body.




- 2 Unplug the **quick connector** and separate the lamp body from the bottom cover.

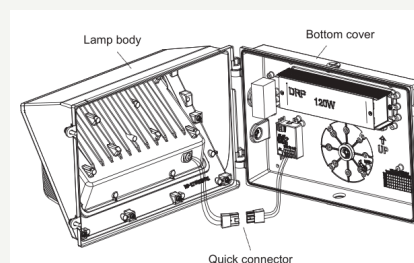

- 3 Drill holes in the bottom cover; choose their location according to the actual installation.




- 4 Punch out the hole plug and stick the **mounting cushion (BB)** behind the bottom cover.




INSTALLATION (CONTINUED)


- 5 Install the bottom cover on the **junction box**.

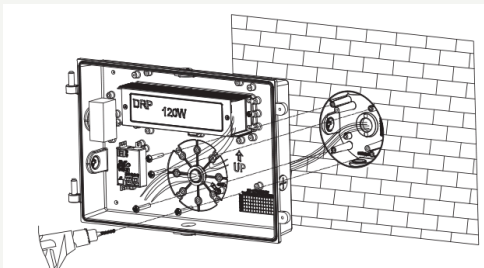

- 6 Make the **wiring** connections.



- 7 Fix the lamp body to the bottom cover and plug in the **quick connector**.

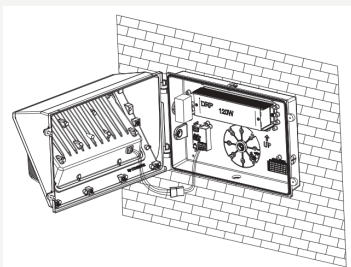

- 8 Fix the lamp body to the bottom cover and apply glue around the lamp body.

