

# LED LAMP

## ARTISAN



G16.5, G30, G40

**LOW**  
non visible  
**FLICKER**



### Features & Benefits

Reduced flicker down to 10%

- Compare to 6.6% traditional incandescent
- Far below California T20 standard 30%
- Significantly improve light quality
- Optimize eye comfort


With clear, amber or milky white glass cover

Dimmable, High CRI (80+)

15,000 hour average life span

Rated for damp locations

### Dimensional drawing

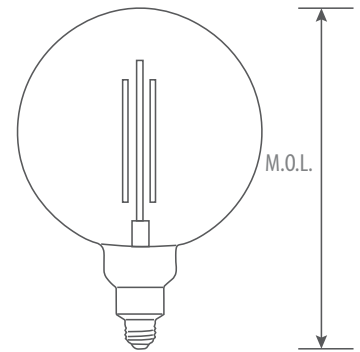

### Warranty & Cautions

2-year limited warranty

Operating temperature range between -20°C and +40°C

### Ordering Information

Example: AR-A19LF/8W/30/D/MW

| LED CLASS       | LAMP TYPE                 | WATTAGE  | CCT(K)                                 | BASE                     | DIMMABLE     | COVER                                      |
|-----------------|---------------------------|----------|--|--------------------------|--------------|--|
| AR<br>(Artisan) | G16.5LF<br>G30LF<br>G40LF | 4W<br>5W | 22 (2200K)<br>27 (2700K)<br>30 (3000K) | E12 (E12)<br>Blank (E26) | D (dimmable) | C (Clear)<br>A (Amber)<br>MW (Milky White) |

### Product Specification

| Ordering Code | Model Number              | Product Description                               | Watts (W) | Replacement Filament | Replacement Incandescent | Base | Voltage (V) | Hour Rating | Beam Angle | Initial Lumens (lm) | CCT(K) | CRI | Damp LOC. | M.O.L. (inch) | Case QTY. |
|---------------|---------------------------|---|-----------|----------------------|--------------------------|------|-------------|-------------|------------|---------------------|--------|-----|-----------|---------------|-----------|
| 1771146       | AR-G16.5LF/4W/27/E12/D/C  | G16.5 Low Flicker 4W 27K E12 Dimmable Clear       | 4         | -                    | 40W                      | E12  | 120         | 15,000      | 330°       | 350                 | 2700   | 80  | Y         | 3.31          | 50        |
| 1771208       | AR-G16.5LF/4W/30/E12/D/C  | G16.5 Low Flicker 4W 30K E12 Dimmable Clear       | 4         | -                    | 40W                      | E12  | 120         | 15,000      | 330°       | 350                 | 3000   | 80  | Y         | 3.31          | 50        |
| 1771212       | AR-G16.5LF/4W/30/E12/D/MW | G16.5 Low Flicker 4W 30K E12 Dimmable Milky white | 4         | -                    | 40W                      | E12  | 120         | 15,000      | 330°       | 300                 | 3000   | 80  | Y         | 3.31          | 50        |
| 1771109       | AR-G16.5/4W/27/D/C        | G16.5 4W 27K E26 Dimmable Clear                   | 4         | -                    | 40W                      | E26  | 120         | 15,000      | 330°       | 350                 | 2700   | 80  | Y         | 3.31          | 50        |
| 1771147       | AR-G30LF/5W/27/D/C        | G30 Low Flicker 5W 27K Dimmable Clear             | 5         | -                    | 50W                      | E26  | 120         | 15,000      | 330°       | 500                 | 2700   | 80  | Y         | 5.28          | 40        |
| 1771215       | AR-G30LF/5W/30/D/C        | G30 Low Flicker 5W 30K Dimmable Clear             | 5         | -                    | 50W                      | E26  | 120         | 15,000      | 330°       | 500                 | 3000   | 80  | Y         | 5.28          | 40        |
| 1771216       | AR-G30LF/5W/30/D/MW       | G30 Low Flicker 5W 30K Dimmable Milky White       | 5         | -                    | 50W                      | E26  | 120         | 15,000      | 330°       | 450                 | 3000   | 80  | Y         | 5.28          | 40        |
| 1772113       | AR-G30/6W/27/D/F          | G30 6W 27K Dimmable Frost/Milky White             | 6         | -                    | 60W                      | E26  | 120         | 15,000      | 330°       | 600                 | 2700   | 80  | Y         | 5.28          | 40        |
| 1771217       | AR-G40LF/4W/30/D/C        | G40 Low Flicker 4W 30K Dimmable Clear             | 4         | -                    | 40W                      | E26  | 120         | 15,000      | 330°       | 350                 | 3000   | 80  | Y         | 6.77          | 8         |
| 1771218       | AR-G40LF/4W/30/D/MW       | G40 Low Flicker 4W 30K Dimmable Milky White       | 4         | -                    | 40W                      | E26  | 120         | 15,000      | 330°       | 320                 | 3000   | 80  | Y         | 6.77          | 8         |
| 1772910       | AR-G40LF/5W/22/D/A        | G40 Low Flicker 5W 22K Dimmable Amber             | 5         | 50W                  | -                        | E26  | 120         | 15,000      | 330°       | 500                 | 2200   | 80  | Y         | 6.77          | 8         |