

TECHNICAL SPECIFICATIONS


- | | | | |
|--------------------|------------------------|------------|-------------------------|
| • Input voltage | : 120-277 VAC, 50/60hz | • Body | : Glass with PC coating |
| • Wattage | : 18 watts | • End cap | : G13 |
| • Lumens | : 2200 | • Lens | : Frosted |
| • Power factor | : >0.95 | • Dimmable | : No |
| • Available colors | : 4000K, 5000K, 6500K | • Lifespan | : 50 000 hours |
| • Operation temp. | : -20°C - 45°C | • Warranty | : 5 years |
| • Type | : A+B | • Length | : 47 3/4 Inches |

3 COLORS TEMPERATURE SETTINGS

CCT is controlled by the switch at the end of the tube




- Upper position : 4000K
- Middle position : 5000K
- Lower position : 6500K




WIRING DIAGRAM:

TYPE A (Ballast compatible) - Assembly introduction:



TYPE B (AC directly, double end OR single end ballast bypass) - Assembly introduction:

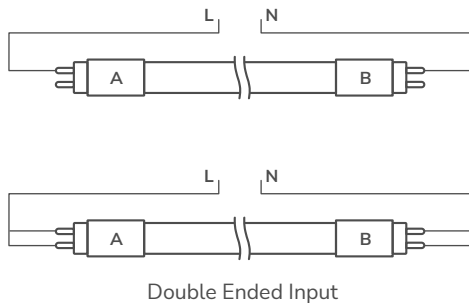

BALLAST COMPATIBLE LIST (partial non-exhaustive list)

	Brand	Model
1	KEYSTONE	KTEB-432-UV-IS-N-P
2	KEYSTONE	KTEB-332-UV-IS-N-P
3	KEYSTONE	KTEB-232-UV-IS-N-P
4	OSRAM	QTP 4X32T8/UNV ISN-SC
5	OSRAM	QHE 2X32T8/UNV PSN-MC
6	OSRAM	QTP 2X32T8/UNV ISN-SC
7	OSRAM	QTP 3X32T8/UNV ISN-SC
8	PHILIP	ICN-2P32-N
9	PHILIP	ICN-4P32-N
10	PHILIP	REB-4P32-SC
11	PHILIP	IOPA-2P32-N
12	ESPEN	VE2P32MVHIPE11068
13	ESPEN	VE2P32MVHIPHE11069
14	ESPEN	VE2P32MVHPPE11080
15	ESPEN	VE4P32MVHPPE11086
16	EIKO	PM-3X32T8-UNV-IS-H
17	EIKO	PM-4X32T8-UNV-IS
18	EIKO	PM-2X32T8-UNV-IS