

SPECIFICATION

NEXLEDS[®]
NEXLEDS LTD



IP65



3WATT Choosable
Flip Switch to change WATT

75W 60W 45W

120W 96W 72W



3CCT Choosable
Flip Switch to change CCT

3000K 4000K 5000K



LED Wall Pack

NX-OWWP3-75W-DV-3C-3W

NX-OWWP3-120W-DV-3C-3W


Specification

| | | |
|-----------------|---|-----------------------------|
| PRODUCT NAME : | LED Wall Pack | |
| MODEL NO. : | NX-OWWP3-75W-DV-3C-3W | NX-OWWP3-120W-DV-3C-3W |
| WATTAGE: | 75W-60W-45W Changeable | 120W-96W-72W Changeable |
| SPECIFICATION : | AC120-347V; 50/60Hz; 700mA | AC120-347V; 50/60Hz; 1100mA |
| WORKING TEMP : | -40-45(°C) | |
| POWER FACTOR : | >0.9 | |
| CRI(RA) : | >70 | |
| COLOR : | Dark Bronze | |
| MATERIAL : | Die-casting Aluminum | |
| LIGHT SOURCE : | Lumileds2835 | |
| LUMEN : | 130 lm / W | |
| LIFE TIME : | 50000 hrs | |
| BEAM ANGLE : | 90° | |
| PRODUCT SIZE : | 14x8.9x4.76 inch | |
| IP : | IP65 | |
| APPLICATION : | General outdoor security lighting, pathways, loading docks, perimeters and etc. | |
| WARRANTY : | 5 years | |
| STANDARD : | UL, c UL, DLC, FCC | |
| COLOR TEMP : | 3000K- 4000K-5000K changeable | |

Feature:

- Ultra-slim, die-cast aluminum housing with (3) available 1/2" threaded conduit hubs: (1) on back and (2) on 2 sides, (1) on bottom
- Powered by 0–10V dimming LED drivers
- Color Select Technology: Adjustable CCT (3000K, 4000K, or 5000K)
- Borosilicate glass lens diffuses light source and provides uniform distribution
- Covers footprint of mid-size & large-size HID wallpacks
- Ambient operating temperature: -40°C/-40°F to 45°C/113°F
- UL listed for wet locations, IP65
- Power Factor: >0.9
- THD: <20%
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions

Product Dimension

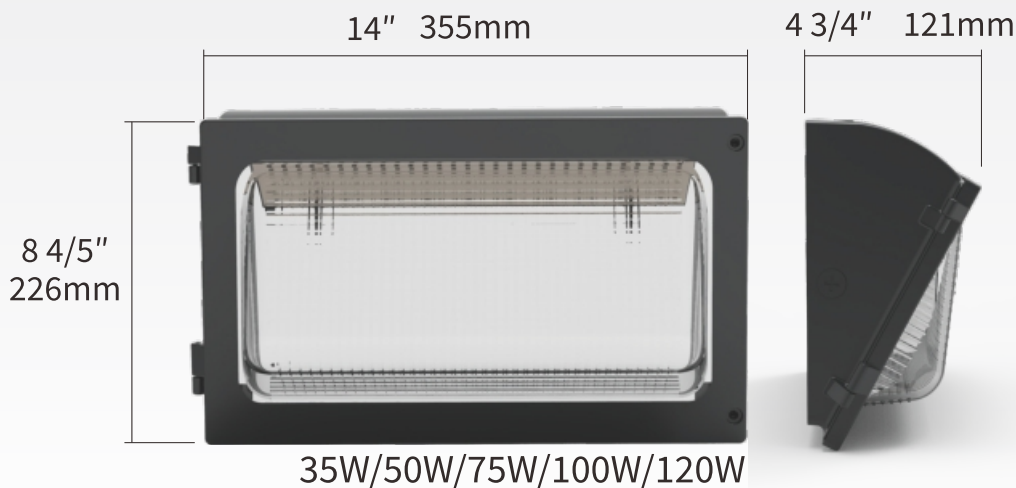

Installation Reference:

