




**TECHNICAL DRAWING**

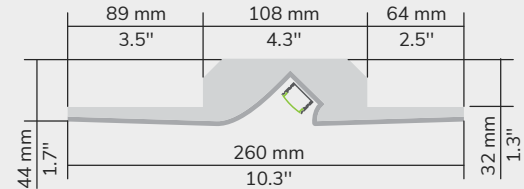


**PRODUCT DESCRIPTION**

The LATUS gypsum cove presents a unique asymmetric recessed LED design for drywall installations, capable of illuminating a nearby surface at a 45-degree angle, with adjustable distance settings. Its even light distribution is particularly effective in accentuating artworks and display pieces. Compatible with standard gypsum panels, this moulding requires minimal back clearance (merely 1-1/4 inches) and offers effortless installation even in confined spaces between narrow beams or joists. Additionally, this gypsum cove can be treated with primer and painted, similar to standard wall surfaces.

**FEATURES**

- Architecturally designed shape in extruded polystyrene foam with high R-factor and fiberglass-reinforced exterior, finished in primable, paintable white plaster.
- Compatible with standard 1/2in. gypsum panels for flush installation, or adaptable with drywall mud for seamless integration with 5/8in. panels.
- Direct fit for the 84 and 85 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation
- Suitable for LED engines up to 14mm wide
- Sold in 8-foot (2.4m) sections.
- 5 Years warranty.

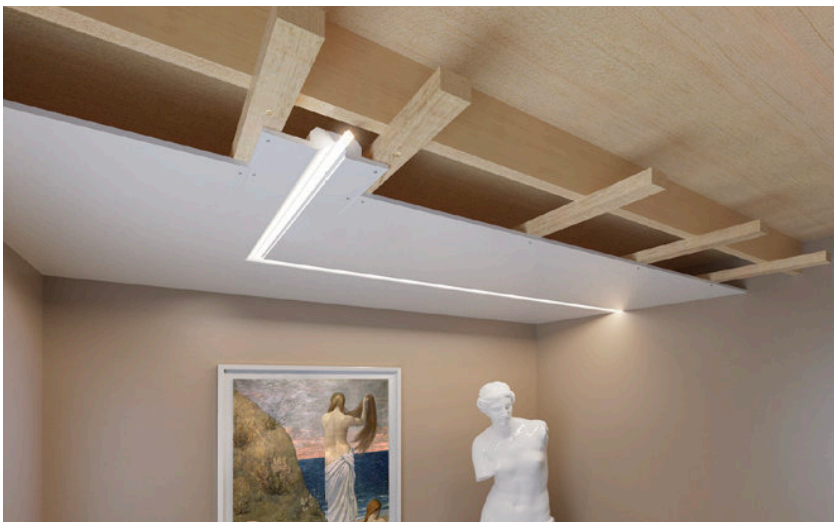

GYPSUM



Available in straight section of 8 feet  
(96 inches/2.4 m).

Light source sold separately from the Gypsum Profile

**Latus Gypsum Cove**  
LCGYPSUM-CO-LATUS

**SUGGESTED ALUMINUM PROFILE**

PROFILE



**Aluminum Profile 84**  
LCPROF-84



**Aluminum Profile 85**  
LCPROF-85

To see the complete specifications of the featured aluminum profiles, visit the products page at:

**Aluminum Profile 84:** <https://ledco.ca/en/products/led-strip-aluminum-profile-84>

**Aluminum Profile 85:** <https://ledco.ca/en/products/led-strip-aluminum-profile-85>