




LCPAN-2X2-35W-MW-CCT-UV



LCPAN-1X4-35W-MW-CCT-UV

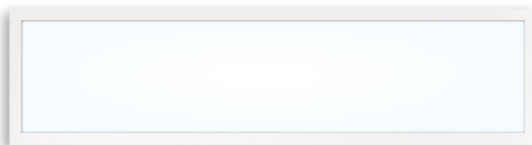

LCPAN-2X4-50W-MW-CCT-UV

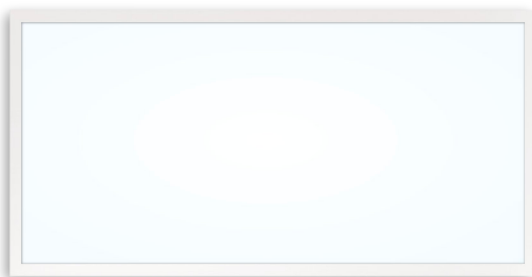

TECHNICAL SPECIFICATIONS


- cULus listed - 130lm/W
- Multiple Wattage and Multiple Kelvin (CCT)
- 3 convenient sizes (2' X 2', 1' X 4', 2' X 4')
- No UV and IR emission
- 120-347V auto-sensing driver, PF >0.9
- L70 @ 54 000 Hrs
- CRI ≥80
- 0-10V Dimmable
- Aluminium body
- 100° + beam angle
- Damp location / IC rated
- 5-years limited warranty
- Operating temperature range -20°C ~ +50°C
- Suspension cables and surface mount frame optional

DIMENSIONS, WATTAGES AND TEMPERATURES

SIZE	MODEL NUMBER	LENGTH	HEIGHT	WIDTH	WATTAGES	KELVIN
2' X 2'	LCPAN-2X2-35W-MW-CCT-UV	24"	24"	1.38"	35-30-25W	3000-3500-4000-5000K
1' X 4'	LCPAN-1X4-35W-MW-CCT-UV	48"	12"	1.38"	35-30-25W	3000-3500-4000-5000K
2' X 4'	LCPAN-2X4-35W-MW-CCT-UV	48"	24"	1.38"	50-40-35W	3000-3500-4000-5000K





TECHNICAL DRAWING

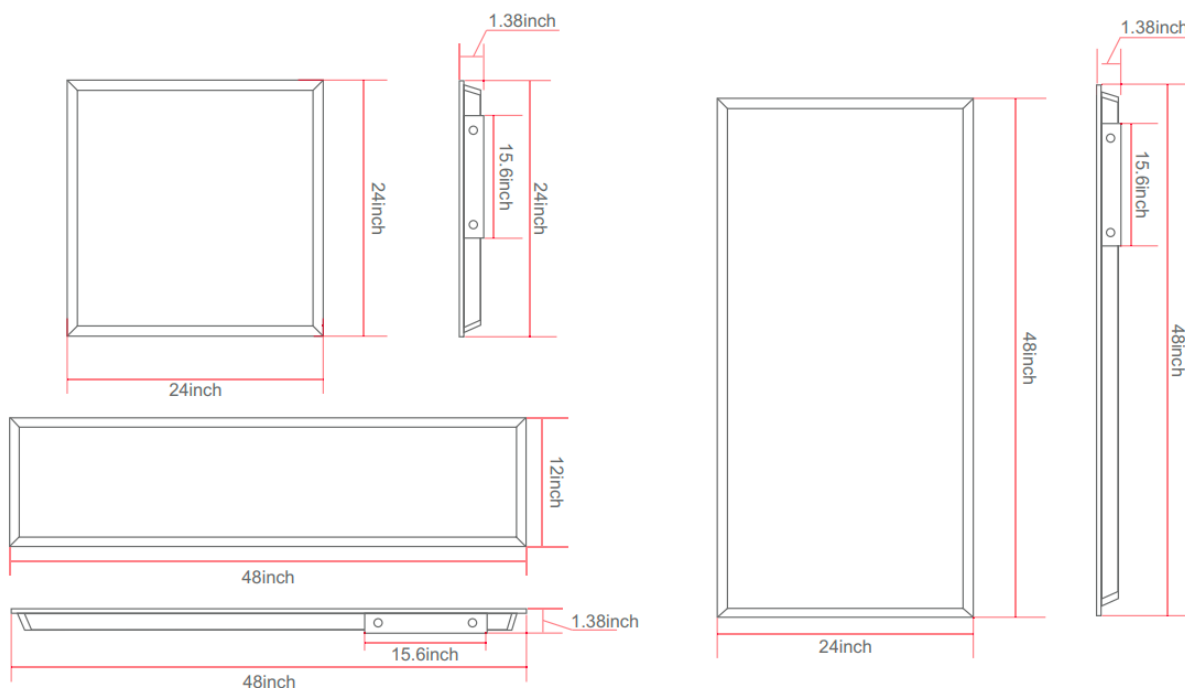


MOUNTING OPTIONS



For recessed grid ceiling installations, our mounting clips may be used to securely mount the RGD-BLP5 luminaire to the T-Bar frame or as to act as suspension points.

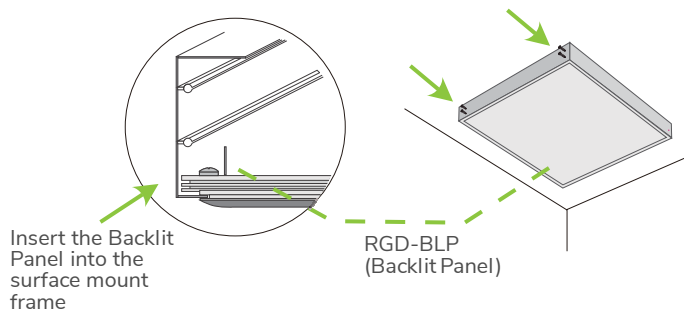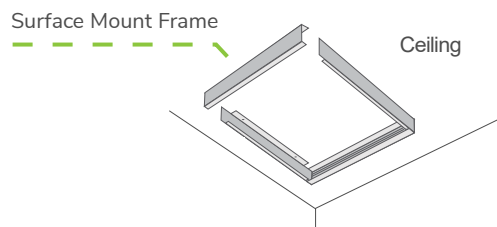


POWER & CCT BACK-LIT LED PANEL LIGHT SERIES

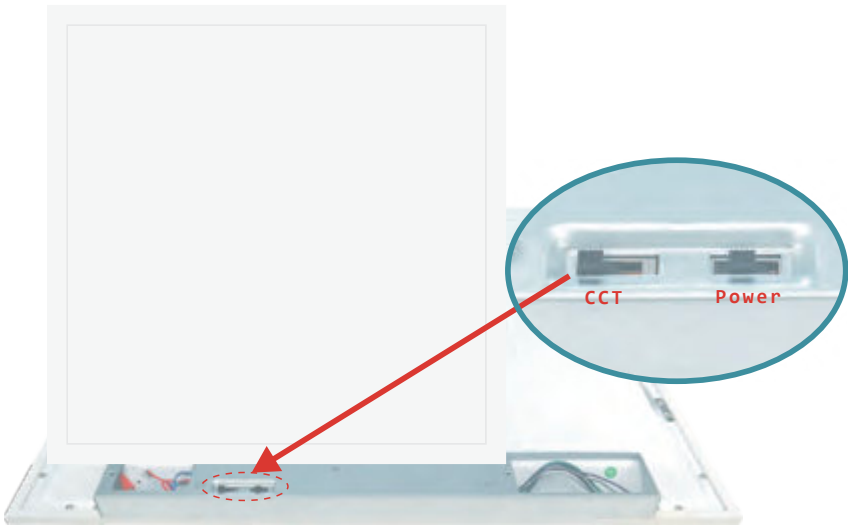

→


20W 3000K	25W 3000K
20W 3500K	25W 3500K
20W 4000K	25W 4000K
20W 5000K	25W 5000K
30W 3000K	35W 3000K
30W 3500K	35W 3500K
30W 4000K	35W 4000K
30W 5000K	35W 5000K

ELECTRICAL SCHEMATIC DIAGRAM

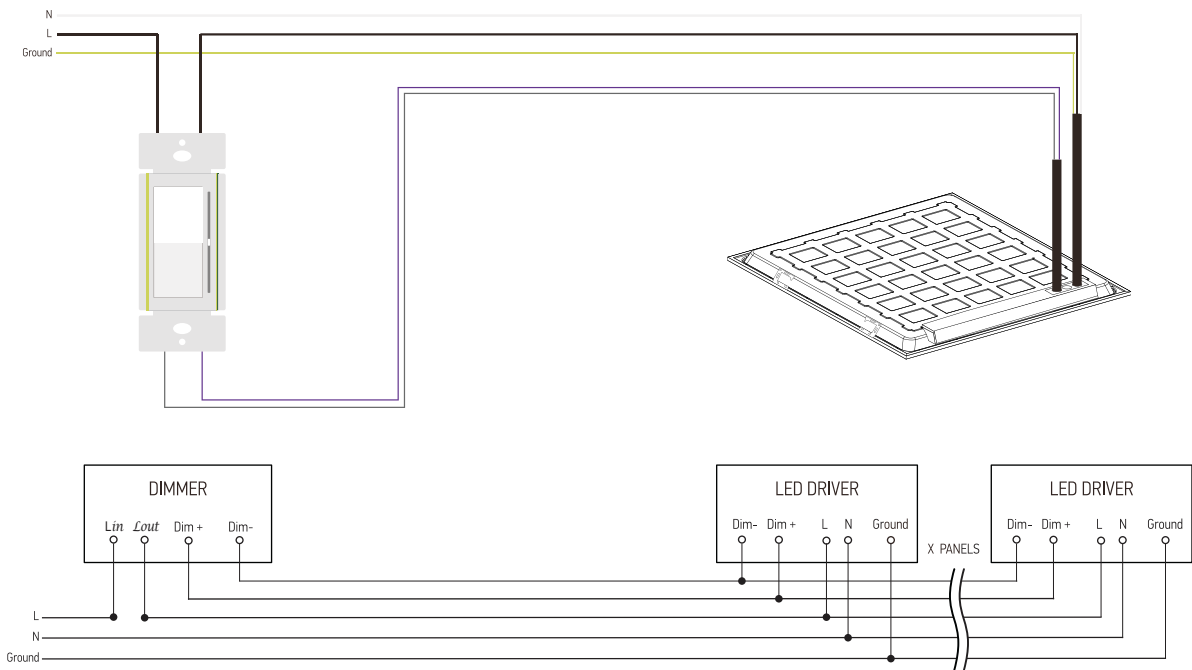


INSTALLATION INSTRUCTIONS


RECESSED MOUNTED INSTALLATION

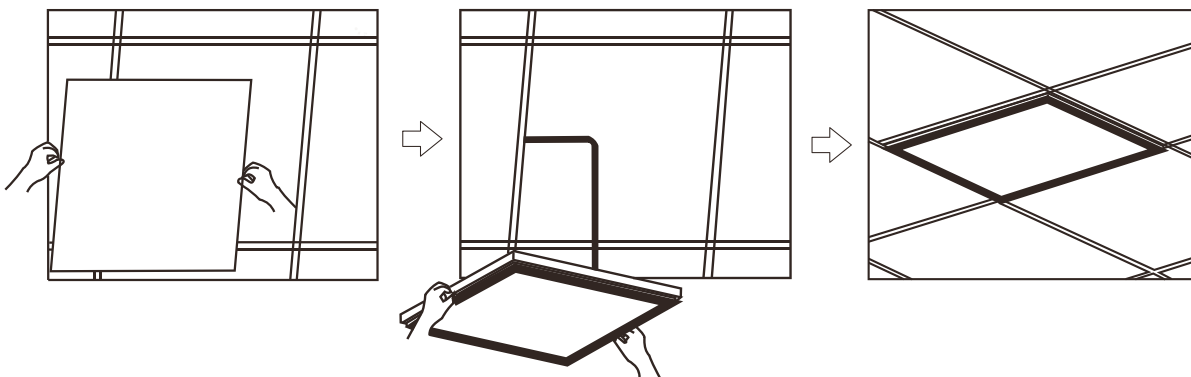

SUSPENDING INSTALLATION

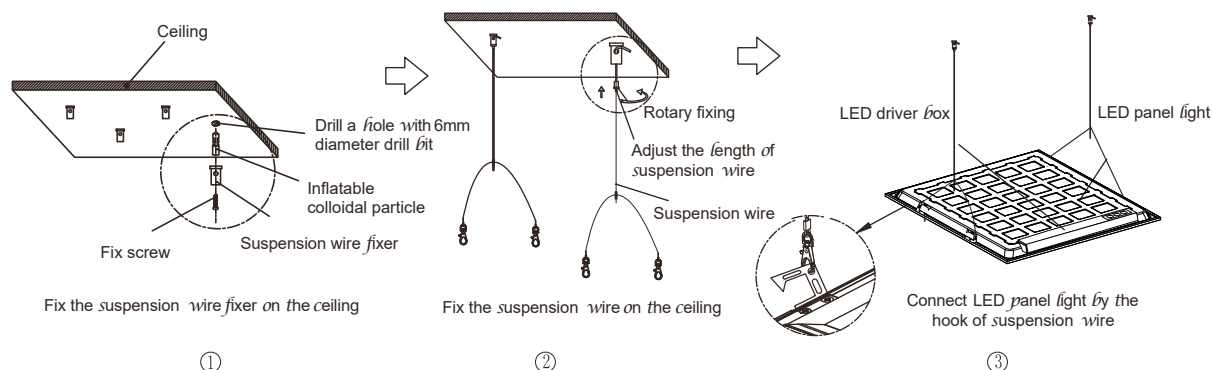

SURFACE MOUNTED INSTALLATION

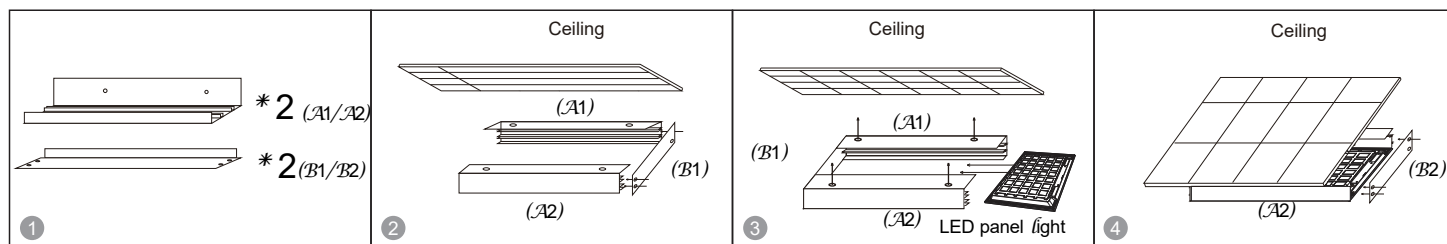

- Parts A1, A2, B1, B2;
- First install A1, A2, and B1(as illustrated);
- As is shown in the figure, fix A1 and A2 on the ceiling or on the roof, and then insert the Back-lit panel light directly (the end with power source enters later);
- Install B2, finish installation.