







TECHNICAL DRAWING

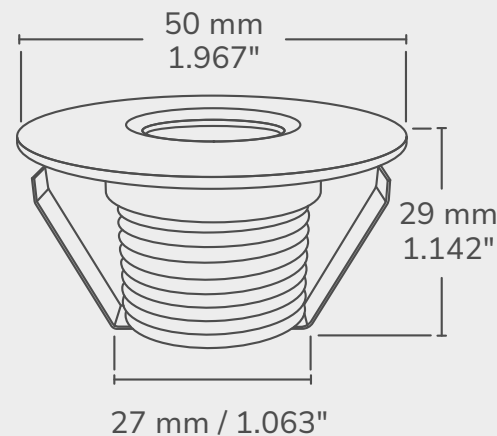

TECHNICAL SPECIFICATIONS

• Voltage	: 12/24 V DC	• Cutout size	: 35mm / 1.378 inches
• Light Intensity	: 125 Lumens	• Lifespan	: 25 000 Hours
• Consumption	: 1 Watts	• Dimmable	: Yes
• Incandescent Equivalent	: 20 Watts	• Protection Rating	: IP67
• Colors and temperatures	: 3000K, 4000K, RGB	• Trim Options	: 1 side, 2 sides, Round, Square & Round Louver
• Projection angle	: 25°	• Trim Colors	: White, Black & Brushed Stainless
• IRC	: >80		
• Power Factor	: +90		

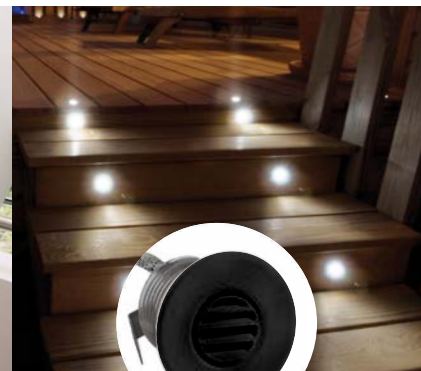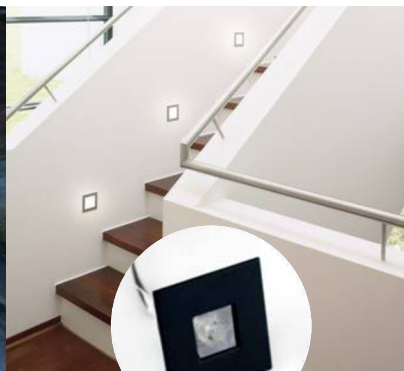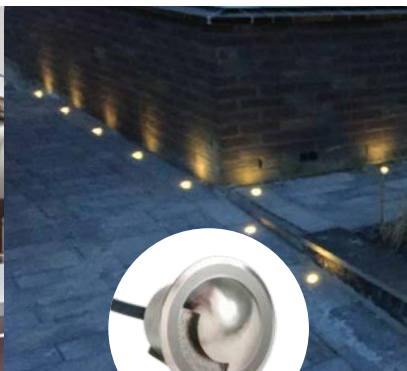

TRIM OPTIONS

MODELS		PRODUCT CODES	
	Round Stainless	3000K:	LCPK2000R-1W-3000K-BS
		4000K:	LCPK2000R-1W-4000K-BS
		RGB:	LCPK2000R-1W-RGB-BS
	Round White	3000K:	LCPK2000R-1W-3000K-WH
		4000K:	LCPK2000R-1W-4000K-WH
		RGB:	LCPK2000R-1W-RGB-WH
	Round Black	3000K:	LCPK2000R-1W-3000K-BK
		4000K:	LCPK2000R-1W-4000K-BK
		RGB:	LCPK2000R-1W-RGB-BK
	Square Stainless	3000K:	LCPK2000S-1W-3000K-BS
		4000K:	LCPK2000S-1W-4000K-BS
		RGB:	LCPK2000S-1W-RGB-BS
	Square White	3000K:	LCPK2000S-1W-3000K-BS
		4000K:	LCPK2000S-1W-4000K-BS
		RGB:	LCPK2000S-1W-RGB-BS
	Square Black	3000K:	LCPK2000S-1W-3000K-BK
		4000K:	LCPK2000S-1W-4000K-BK
		RGB:	LCPK2000S-1W-RGB-BK
	1 Way Stainless Steel	3000K:	LCPK2000R-1S-1W-3000K-BS
		4000K:	LCPK2000R-1S-1W-4000K-BS
		RGB:	LCPK2000R-1S-1W-RGB-BS
	2 Way Stainless Steel	3000K:	LCPK2000R-2S-1W-3000K-BS
		4000K:	LCPK2000R-2S-1W-4000K-BS
		RGB:	LCPK2000R-2S-1W-RGB-BS
	Persienne Stainless	3000K:	LCPK2000P-1W-3000K-BS
		4000K:	LCPK2000P-1W-4000K-BS
		RGB:	LCPK2000P-1W-RGB-BS
	Persienne Black	3000K:	LCPK2000P-1W-3000K-BK
		4000K:	LCPK2000P-1W-4000K-BK
		RGB:	LCPK2000P-1W-RGB-BK