





TECHNICAL DRAWING





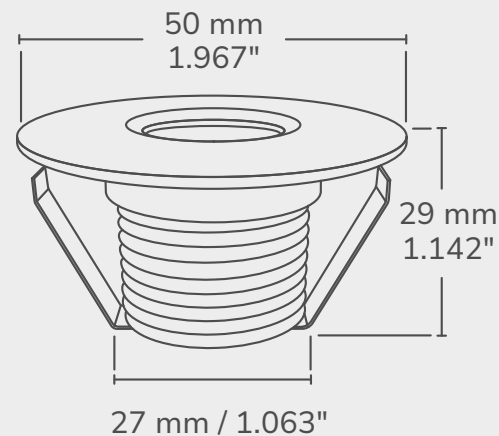

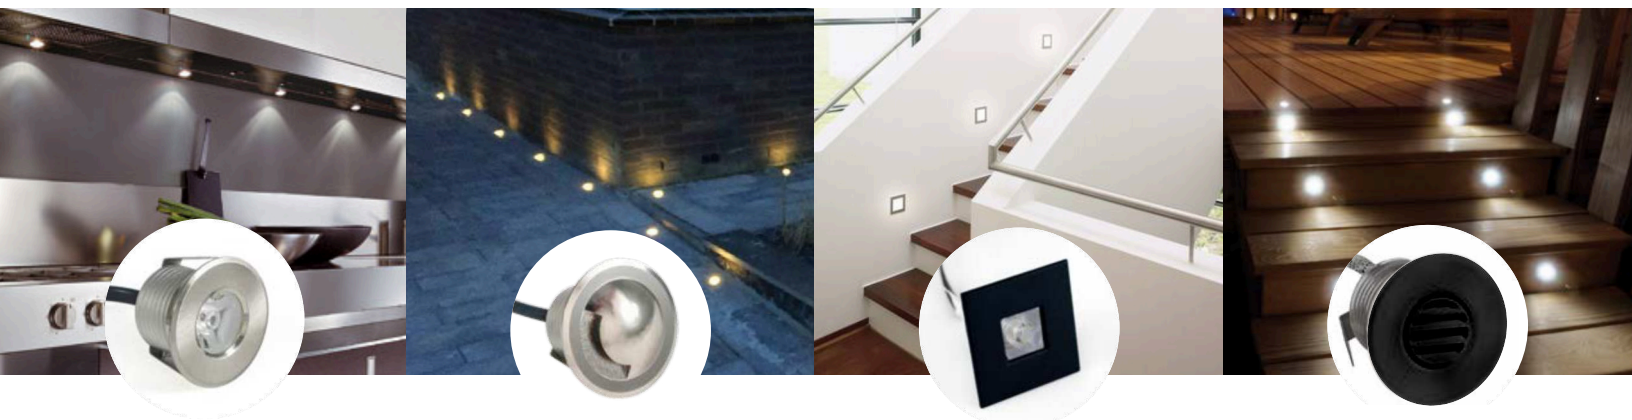





TECHNICAL SPECIFICATIONS

- | | | | |
|---------------------------|---------------------|---------------------|----------------------------------------------------|
| • Voltage | : 12/24 V DC | • Cutout size | : 35mm / 1.378 inches |
| • Light Intensity | : 125 Lumens | • Lifespan | : 25 000 Hours |
| • Consumption | : 1 Watts | • Dimmable | : Yes |
| • Incandescent Equivalent | : 20 Watts | • Protection Rating | : IP67 |
| • Colors and temperatures | : 3000K, 4000K, RGB | • Trim Options | : 1 side, 2 sides, Round,
Square & Round Louver |
| • Projection angle | : 25° | • Trim Colors | : White, Black & Brushed
Stainless |
| • IRC | : >80 | | |
| • Power Factor | : +90 | | |



TRIM OPTIONS

	MODELS	PRODUCT CODES
	Round Stainless	3000K: LCPK2000R-1W-3000K-BS 4000K: LCPK2000R-1W-4000K-BS RGB: LCPK2000R-1W-RGB-BS
	Round White	3000K: LCPK2000R-1W-3000K-WH 4000K: LCPK2000R-1W-4000K-WH RGB: LCPK2000R-1W-RGB-WH
	Round Black	3000K: LCPK2000R-1W-3000K-BK 4000K: LCPK2000R-1W-4000K-BK RGB: LCPK2000R-1W-RGB-BK
	Square Stainless	3000K: LCPK2000S-1W-3000K-BS 4000K: LCPK2000S-1W-4000K-BS RGB: LCPK2000S-1W-RGB-BS
	Square White	3000K: LCPK2000S-1W-3000K-BS 4000K: LCPK2000S-1W-4000K-BS RGB: LCPK2000S-1W-RGB-BS
	Square Black	3000K: LCPK2000S-1W-3000K-BK 4000K: LCPK2000S-1W-4000K-BK RGB: LCPK2000S-1W-RGB-BK
	1 Way Stainless Steel	3000K: LCPK2000R-1S-1W-3000K-BS 4000K: LCPK2000R-1S-1W-4000K-BS RGB: LCPK2000R-1S-1W-RGB-BS
	2 Way Stainless Steel	3000K: LCPK2000R-2S-1W-3000K-BS 4000K: LCPK2000R-2S-1W-4000K-BS RGB: LCPK2000R-2S-1W-RGB-BS
	Persienne Stainless	3000K: LCPK2000P-1W-3000K-BS 4000K: LCPK2000P-1W-4000K-BS RGB: LCPK2000P-1W-RGB-BS
	Persienne Black	3000K: LCPK2000P-1W-3000K-BK 4000K: LCPK2000P-1W-4000K-BK RGB: LCPK2000P-1W-RGB-BK