



**WHITE**  
LCW21-CTRL-WH



**RGBW**  
LCW24-CRTL-RGB/RGBW



## TECHNICAL SPECIFICATIONS

### FEATURES

- 4 zone touch panel with 1 to 5 colors RF remote
- Each zone can remote control multiple 2.4G controllers
- Ultra sensitive high strength glass touch panel
- Smooth and accurate color adjustment
- Easy installation, no wiring, removable

### INPUT AND OUTPUT

- Output signal : RF (2.4GHz)
- Working voltage : 3VDC (AAA x 2)
- Working current : <5mA (without tune)  
<20mA (with tune)
- Standby current : <20µA
- Standby time : 1 year
- Remote distance : 30m (barrier-free space)

### ENVIRONMENT

- Operation temperature : -30°C ~ +55°C
- Case temperature (Max.) : +65°C
- IP rating : IP20

### SAFETY AND EMC

- EMC standard : ETSI EN 301 489-1 V2.2.3,  
ETSI EN 301 489-17 V3.2.4
- LVD standard : EN 62368-1 : 2020+A11:2020
- Certification : CE, EMC, LVD, RED
- Warranty : 3 years

## ASSOCIATED PRODUCTS

For more details on these items, ask for their individual data sheets.


### 4 CHANNEL LED CONTROLLER

LCLP-REC12A-UNI



### 4 CHANNEL WI-FI LED CONTROLLER

LCRECEPTWIFI-LC

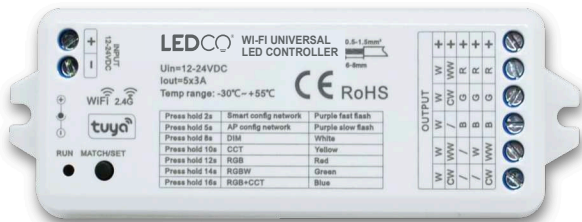

### 4 CHANNEL POWER REPEATER/AMPLIFIER

LCAMPLIFIER-20A-4CH

