


**SPECIFICATIONS**

- |                         |                            |                        |                            |
|-------------------------|----------------------------|------------------------|----------------------------|
| • Input voltage :       | 120-347V                   | • Warranty :           | 5 years                    |
| • Rated power:          | 30W/38W/46W                | • Certifications :     | ETL, DLC5.1 Premium        |
| • Lumen:                | 5980lm                     | • Color Temperatures : | CCT(3500K-4000K-5000K)     |
| • Luminous Efficiency : | 130lm/W                    | • Dimensions :         | L44.53 x W2.7 x H2.62 Inch |
| • CRI :                 | >80                        |                        |                            |
| • Power Factor :        | >0.99                      |                        |                            |
| • Working temp.:        | -20°C ~+50°C               |                        |                            |
| • IP Grade :            | IP66                       |                        |                            |
| • Environnement :       | Suitable for damp location |                        |                            |
| • Material :            | Metal                      |                        |                            |
| • Life-span :           | 50 000Hrs                  |                        |                            |



**ACCESSORIES**

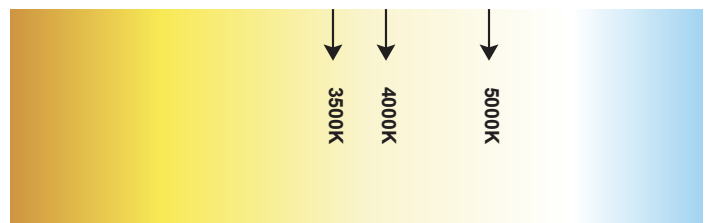

**Surface Mount Kits**  
(LCWRAPACC-CONNECTEUR)



**Suspensions Aircraft Cable**  
(LCWRAPACC-SUSPENSION)

Size: Ø1.5\*1m, Qty: total 2pcs

**GALLERY**

