


SPECIFICATIONS

- | | | | |
|-------------------------|----------------------------|------------------------|----------------------------|
| • Input voltage : | 120-347V | • Warranty : | 5 years |
| • Rated power: | 30W/38W/46W | • Certifications : | ETL, DLC5.1 Premium |
| • Lumen: | 5980lm | • Color Temperatures : | CCT(3500K-4000K-5000K) |
| • Luminous Efficiency : | 130lm/W | • Dimensions : | L44.53 x W2.7 x H2.62 Inch |
| • CRI : | >80 | | |
| • Power Factor : | >0.99 | | |
| • Working temp.: | -20°C ~+50°C | | |
| • IP Grade : | IP66 | | |
| • Environnement : | Suitable for damp location | | |
| • Material : | Metal | | |
| • Life-span : | 50 000Hrs | | |



ACCESSORIES

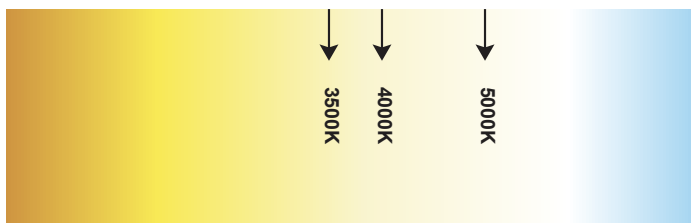

Surface Mount Kits
(LCWRAPACC-CONNECTEUR)



Suspensions Aircraft Cable
(LCWRAPACC-SUSPENSION)

Size: Ø1.5*1m, Qty: total 2pcs

GALLERY

