


SPECIFICATIONS

- | | | | |
|-------------------------|----------------------------|------------------------|-----------------------------|
| • Input voltage : | 120-347V | • Warranty : | 5 years |
| • Rated power: | 64W | • Certifications : | cULus |
| • Lumen: | 8320lm | • Color Temperatures : | CCT(3500K-4000K-5000K) |
| • Luminous Efficiency : | 130lm/W | • Dimensions : | L95.98 x W2.95 x H3.26 Inch |
| • CRI : | >80 | | |
| • Power Factor : | >0.9 | | |
| • Working temp.: | -20°C ~+40°C | | |
| • IP Grade : | IP66 | | |
| • Environnement : | Suitable for damp location | | |
| • Material : | Metal | | |
| • Life-span : | 50 000Hrs | | |

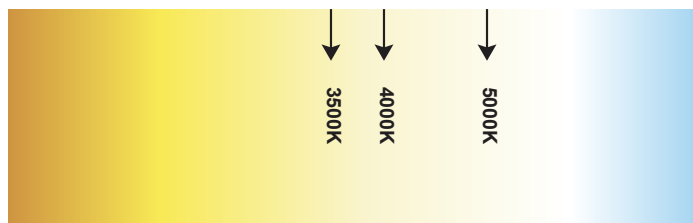

ACCESSORIES

Surface Mount Kits
(LCWRAPACC-CONNECTEUR)



Suspensions Aircraft Cable
(LCWRAPACC-SUSPENSION)

Size: Ø1.5*1m, Qty: total 2pcs