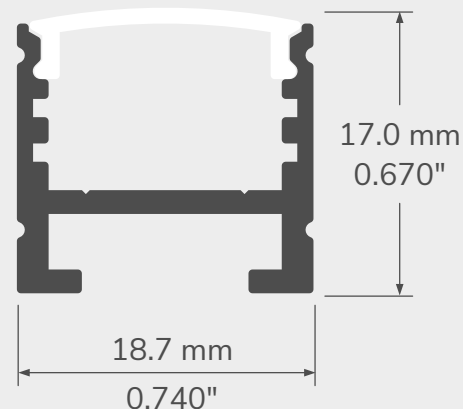


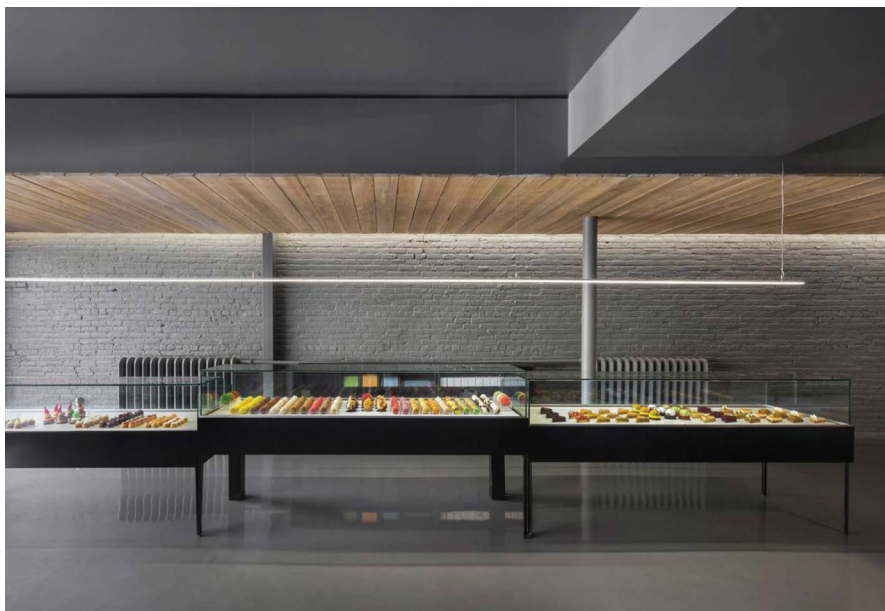


TECHNICAL DRAWING






A SMALL PROFILE AMONG THE BIG BOYS

In addition to offering even lighting, the 14 allows beam adjustment as well as a considerably larger choice of installation options. This profile also offers a wide variety of installation, from fixed to suspended mounting.



FEATURES

- The support rail offers the largest range of installation and assembly.
- Designed to give a uniform light without hot spots with an opal or prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories (over 40 options).
- Designed to meet North American woodworking standards.

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 14 - Profile, alu	 CL - Clear lens	 FL - Flat bracket	Custom length by sections of 2 to 240 inches (6m).
 14BK - Profile, black	 PR - Prime lens	 45 - 45° Corner bracket	
 14WH - Profile, white	 BK - Black lens	 SW - Swivel bracket 180°	
 14CS - Profile, custom color	 FO - Focus lens	 Easy beam angle adjustment	
	 OP3D - Square 3D, Opal		

