




TECHNICAL DRAWING

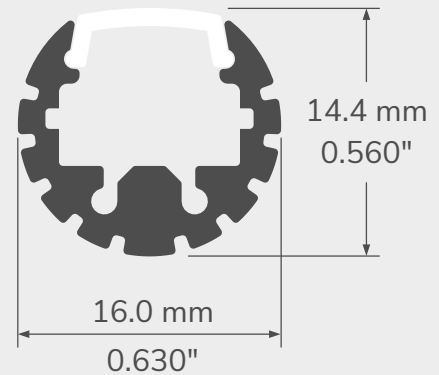


MEET OUR MAGIC WAND!

A well cherished secret that we just have to brag about. The no.45 profile is a slim but extremely versatile display solution. With its ultra-compact size and its complete freedom of lighting direction, and accepting most LED strips, you will find many ways to install it with its wide variety of accessories.



FEATURES

- Ultra-compact size with a diameter of only 16mm (5/8in).
- All of the no.45 brackets allow adjusting lighting direction along the axis as desired.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	LENGTH
 45 - Profile, alu	 CL - Clear lens	 FL - Flat bracket	NOTE: Only available with SUS bracket (suspension)  Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White	Custom length by sections of 2 to 60 inches (1.5m).
 45BK - Profile, black	 OX - Optiflex lens	 U0 - "U" bracket, Alu  P0 - "P" bracket, Alu	 Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White	
 OP - Opallens	 SIL - SiLens	 VS - Arm kit vertical surface Maximum = 12"  VI - Arm kit vertical insert Maximum = 12"	 Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White	
		 HS - Arm kit horizontal surface Maximum = 12"  HI - Arm kit horizontal insert Maximum = 12"		
		 SUS-4500 endcap suspension kit with 15ft. coax. cable		

