




TECHNICAL DRAWING







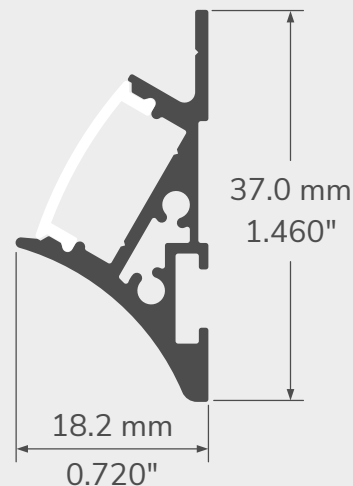











**PRACTICAL AND SLEEK**

The 165 profile is your best choice for product display. It offers lighting at a 30-degree angle, so you can cover all of the items on your shelves or racks and bring them centerstage. The smooth curved profile adds an extra accent in style. Use it with a clear lens to maximize the light output, or with an Optiflex or Opal lens for no hot spots from any angle.



**FEATURES**

- Profile designed to light items on shelves and displays.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

PROFILE	LENSES	MOUNTING HARDWARE	MOTION SENSORS*	LENGTH
 <p>165 - Profile, alu incl. 3M mounting tape</p>	 <p>CL - Clear lens</p>	 <p>3M - Mounting tape, double face</p>	 <p>SEN1- 30sec. Embedded</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>
 <p>165BK - Profile, black incl. 3M mounting tape</p>	 <p>SP - Spread lens</p>		 <p>SEN2- 30sec. Outside extrusion</p>	
 <p>165WH - Profile, white incl. 3M mounting tape</p>	 <p>OX - Optiflex lens</p>		 <p>SEN3- 4 min. Embedded</p>	
 <p>165CS - Profile, custom color incl. 3M mounting tape</p>	 <p>OP - Opallens</p>		 <p>SEN4- 4 min. Outside extrusion</p>	
 <p>BK - Black lens</p>	 <p>PR - Prime lens</p>		 <p>SENS5- Intergrated proximity hand motion sensor</p>	

