

LED Doorway Light



| | | | |
|----------------|----------------|----------------------|--------------------|
| SSL-DW3 | Segment | Wattage Range | Lumen Range |
| | Universal | 30-9W | 4,200-1,260lm |

Features

- Modern design compact wallpack with glass diffuser for long life.
- IP65 wet location rated with operating temperature range of -40 °C ~ + 50 °C.
- Field selectable (CCT 3000K, 4000K & 5000K) and selectable wattage
- Efficacy of ≥ 140 lm/W with 120-277V UNV LED driver



Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover

Mounting:

Surface Mounting

Driver:

120-277 V UNV LED driver with Operating temperature range of -40 °C ~ + 50 °C

LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 140 lm/w.

Controls:


Compatible with 0-10V Dimming, Photocell Sensor.



Dimensional Drawing

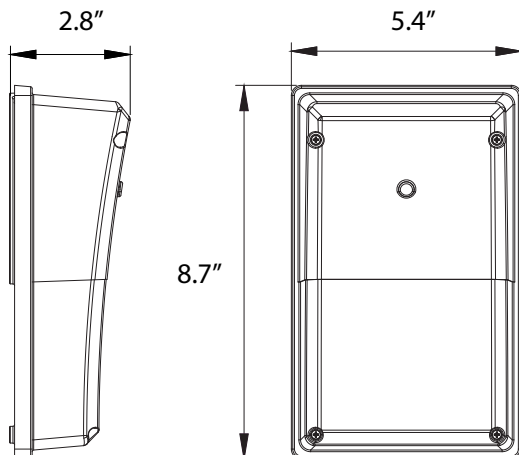

Polar Candela

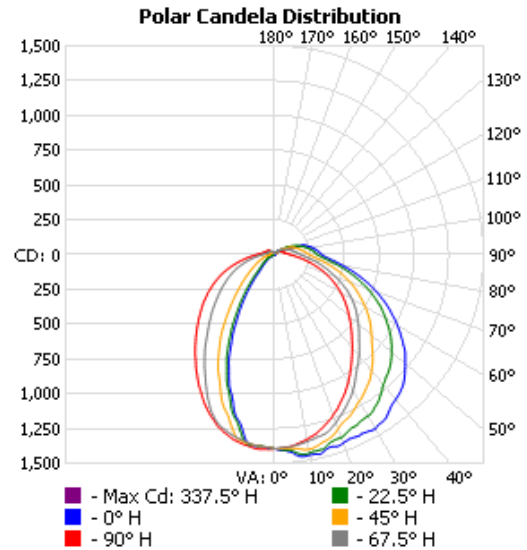

Applications



Malls



Hotels



Industry



Office Complex

LED Doorway Light



| | | | |
|----------------|----------------|----------------------|--------------------|
| SSL-DW3 | Segment | Wattage Range | Lumen Range |
| | Universal | 30-9W | 4,200-1,260lm |

Ordering Information Example: SSL-DW3/15S/MK/UNV/PC/DB

| Family Name | Fixture Type | Wattage | CCT | Voltage | Photocell | Finish |
|----------------------------|-------------------------|--|----------------------------|----------------|--------------|--|
| SSL (Solid state lighting) | DW3 (LED doorway light) | 15S/MW (Selectable Wattage, Max. 15W) 30L/MW (Selectable Wattage, Max. 30W) | MK (Selectable Kelvin/CCT) | UNV (120-277V) | PC (Default) | DB (Dark bronze) BK (Black) WH (White) |

Product Specification

| Ordering Code | DLC Premium | Model Number | Wattage (W) | Input Voltage (V) | Hour Rating | Initial Delivered Lumens (lumen) | CCT (K) | CRI | Wet Location | Dimension L×W×H(inch) | Case QTY. |
|---------------|-------------|-----------------------------|-------------|-------------------|-------------|----------------------------------|----------|-----|--------------|-----------------------|-----------|
| 3662238 | Yes | SSL-DW3/15S/MK/UNV/PC/DB | 15-12-9 | 120-277V | 50,000 | 2100-1680-1260 | 30-40-50 | ≥80 | Yes | 8.7 X 5.4 X 2.8 | 10 |
| 3662237 | Yes | SSL-DW3/30L/MW/MK/UNV/PC/DB | 30-25-20 | 120-277V | 50,000 | 4200-3500-2800 | 30-40-50 | ≥80 | Yes | 8.7 X 5.4 X 2.8 | 10 |
| 3662236 | Yes | SSL-DW3/30L/MW/MK/UNV/PC/BK | 30-25-20 | 120-277V | 50,000 | 4200-3500-2800 | 30-40-50 | ≥80 | Yes | 8.7 X 5.4 X 2.8 | 10 |
| 3682266 | Yes | SSL-DW3/30L/MW/MK/UNV/PC/WH | 30-25-20 | 120-277V | 50,000 | 4200-3500-2800 | 30-40-50 | ≥80 | Yes | 8.7 X 5.4 X 2.8 | 10 |

Related Products



SSL-WP3T+



SSL-WP1TS



SSL-WP2T



DL-VT2