




TECHNICAL DRAWING

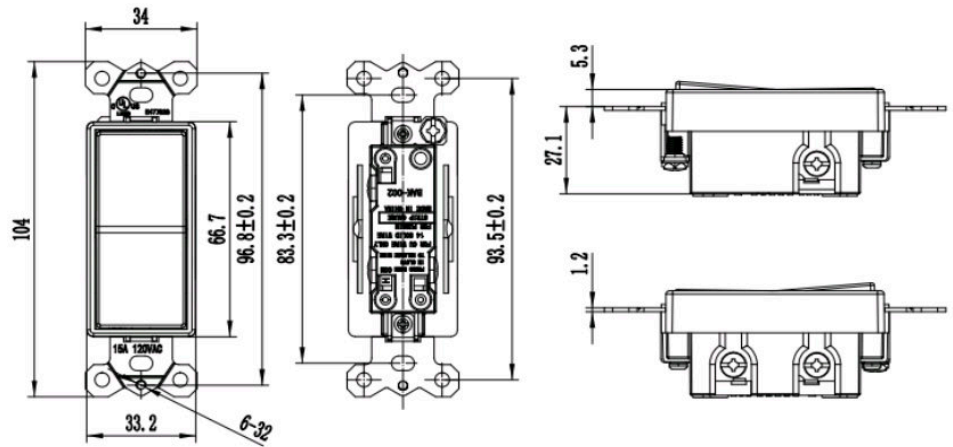

DESCRIPTION

1. Shallow body design fits standard junction boxes. Push-in and side wiring (copper only). Grounding screw.
2. 3-Way :For use with permanently installed lighting fixtures controlled by one or two switches.
3. Impact-resistant, durable thermoplastic rocker and frame.

Certification: cETLus

Weight: 53g

Size: 104*34*32.4mm

TECHNICAL PARAMETER

- Receptacle Rating: 120VAC, 60Hz, 15A
- Dielectric Voltage Withstand: 1500VAC
- Flame Class: UL94-V2
- Switching Life: 40000 times
- Operating temperature: $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Wires: 14AWG