




TECHNICAL DRAWING

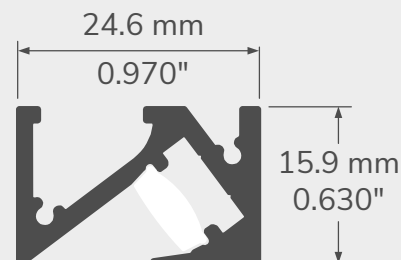

THE ELEGANCE OF SIMPLICITY

A compact profile has been added to this thin series! Profile 425 provides accent lighting at an angle of 53° to highlight products on shelves or to cut out the underside of cabinets. Exclusively: the new high-end SiLens lens made of flexible silicone, which can be installed with a simple touch of the finger. Even better, the phantom brackets perfectly conceal the surface installation. Ideal for commercial or residential applications.



FEATURES

- Compact aluminum profile: 24.58 mm x 15.88 mm (0.97 in x 0.63 in)
- Custom lengths from 2 to 192 inches (4.88 m/16 ft) in aluminum, and 2 to 240 inches (6 m/20ft) in black
- 53° lighting angle
- 4 lumen packages: LP0 (128 lm/1.5 W/ft), LP1 (160 lm/1.5 W/ft), LP2 (255 lm/3.0 W/ft), LP3 (308 lm/4.5 W/ft) in 8 mm width with 5 mm tape guide
- 6 color temperatures (2400 K to 6200 K), CRI 90+
- Exclusive optics: SiLens, made of flexible silicone
- End caps with milled hole on both sides for the feed wire
- Surface installation with phantom brackets
- Optional power supply unit with DCsocket or hardwire connection
- Indoor use, IP22

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 425 - Profile, alu	 SIL - SiLens	 PH - Phantom bracket	Custom length by sections of 2 to 240 inches (6m).
 425BK - Profile, black			
 425WH - Profile, white			

