




TECHNICAL DRAWING



48 mm - 1.890"

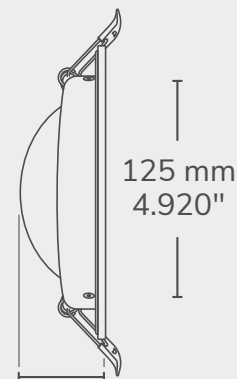

TECHNICAL SPECIFICATIONS

- Color Temp. : 2700K / 3000K / 3500K / 4000K / 5000K Tunable
- Lumens : 680 / 700 / 750 / 760 / 740 LM
- Beam Angle : 40°
- CRI : >80
- Input Voltage : 110-130VAC
- Power : 9W
- Power Factor : >0.94
- Trim color : White / Black
- Dimming : Triac base dimmable
- Location Approved : Damp Location
- Certification : cETLus
- Lifespan : 50,000hrs
- Warranty : 3 years
- Cutout size : 4.25" - (108mm)
- Panel Diameter : 4.92" - (125mm)
- Panel Depth : 1.89" - (48mm)
- Junction Box Length: 4.25" - (108mm)
- Junction Box Width : 2.4" - (60mm)
- Junction Box Height : 1.375" - (35mm)



TRIM OPTIONS

Available trim options :

White

Black

PRODUCT NUMBERS


White

: LCDL-DLS4-5CCT-9W-WH

Black

: LCDL-DLS4-5CCT-9W-BK

COLOR TEMPERATURE SETTINGS

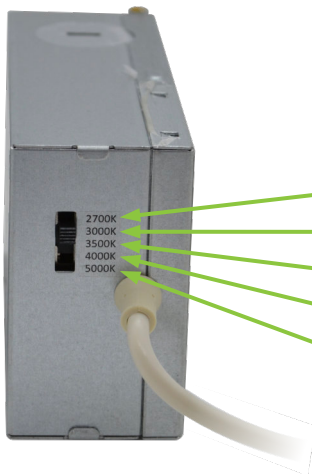

CCT is controlled by the toggle switch on junction box

Toggle it to the upper position, the Light is set at 2700K

Toggle it to the second position, the Light is set at 3000K

Toggle it to the middle position, the Light is set at 3500K


Toggle it to the fourth position, the Light is set at 4000K

Toggle it to the lower position, the Light is set at 5000K

5 COLORS TEMPERATURE SETTINGS

WARM


COLD

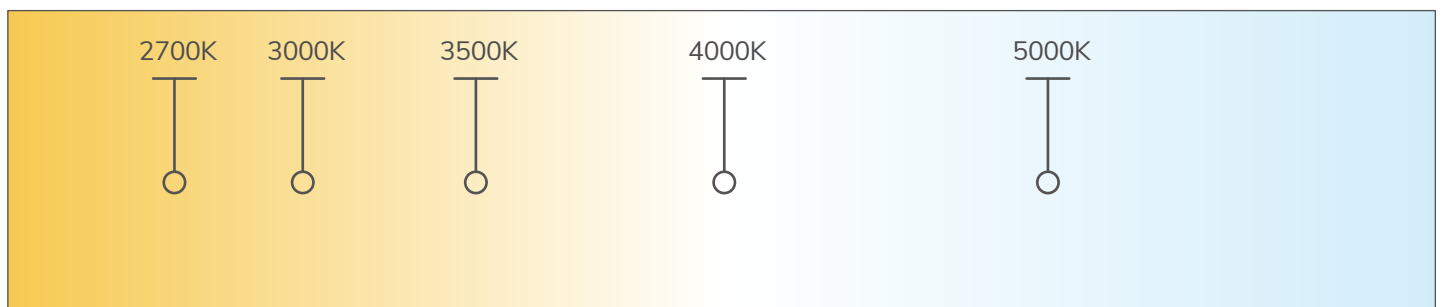

COMPATIBLE DIMMERS

BRAND	MODEL	DIMMING FUNCTION
Lutron	S-603P	DIMMABLE
Leviton	6633-P	DIMMABLE
Leviton	1C33L1	DIMMABLE
Lutron	CTCL-153P	DIMMABLE
Lutron	TG600P	DIMMABLE
Lutron	DV600P	DIMMABLE
Lutron	LG600P	DIMMABLE
Lutron	SCL-153P	DIMMABLE
Lutron	MAW-600	DIMMABLE
Lutron	MS-VP600G	N/A
Lutron	LGCL-153P	DIMMABLE
Lutron	7SCL-153P	DIMMABLE
Lutron	600PH	DIMMABLE
Lutron	DV-600P	DIMMABLE
Lutron	6838	DIMMABLE
Lutron	CTELV-303P	DIMMABLE
Lutron	CTCL-153PD	DIMMABLE
Leviton	6674	DIMMABLE

MOUNTING PLATES

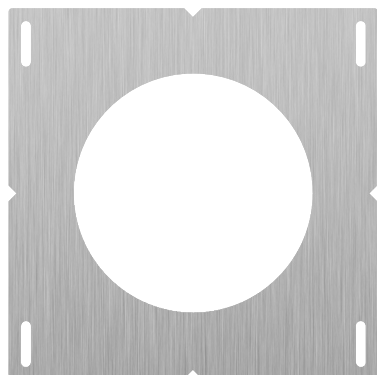

4 inch plate (LCPLATE-414)